


Komatsu PW160
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift BP
Unlocked Rail Cant -150mm

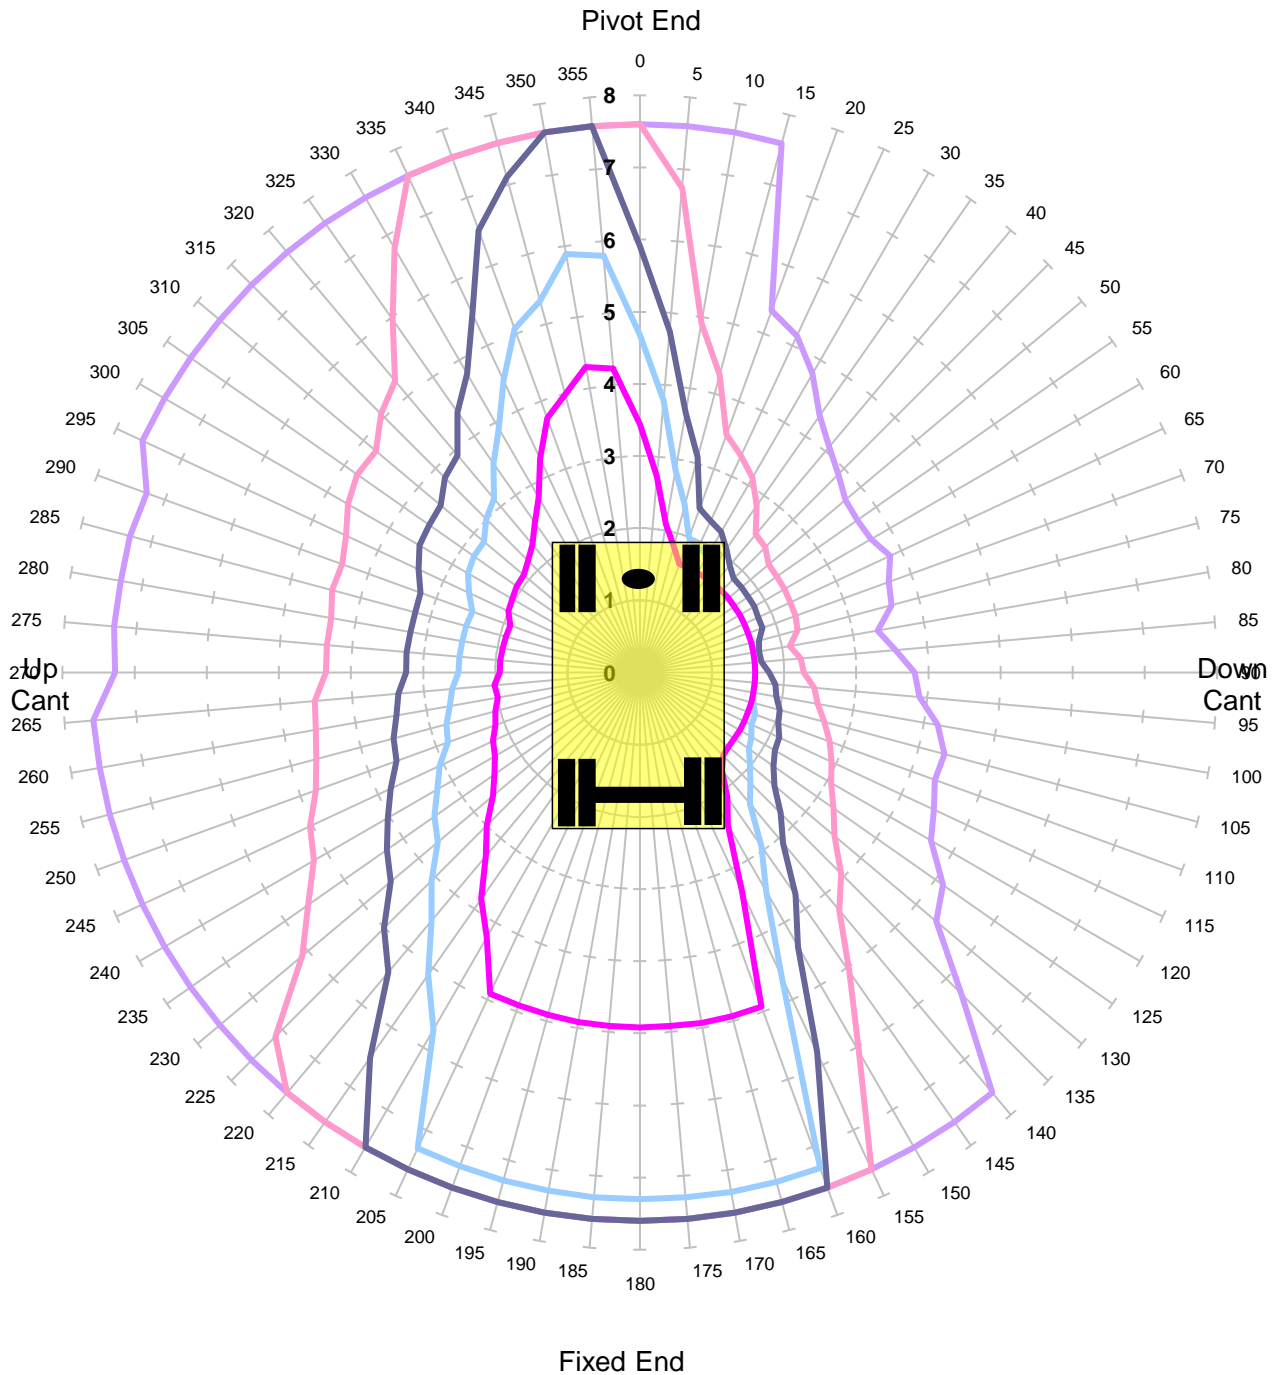


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	67.0%
COMMENT:			

Komatsu PW160
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift BP
Unlocked Rail Cant -50mm

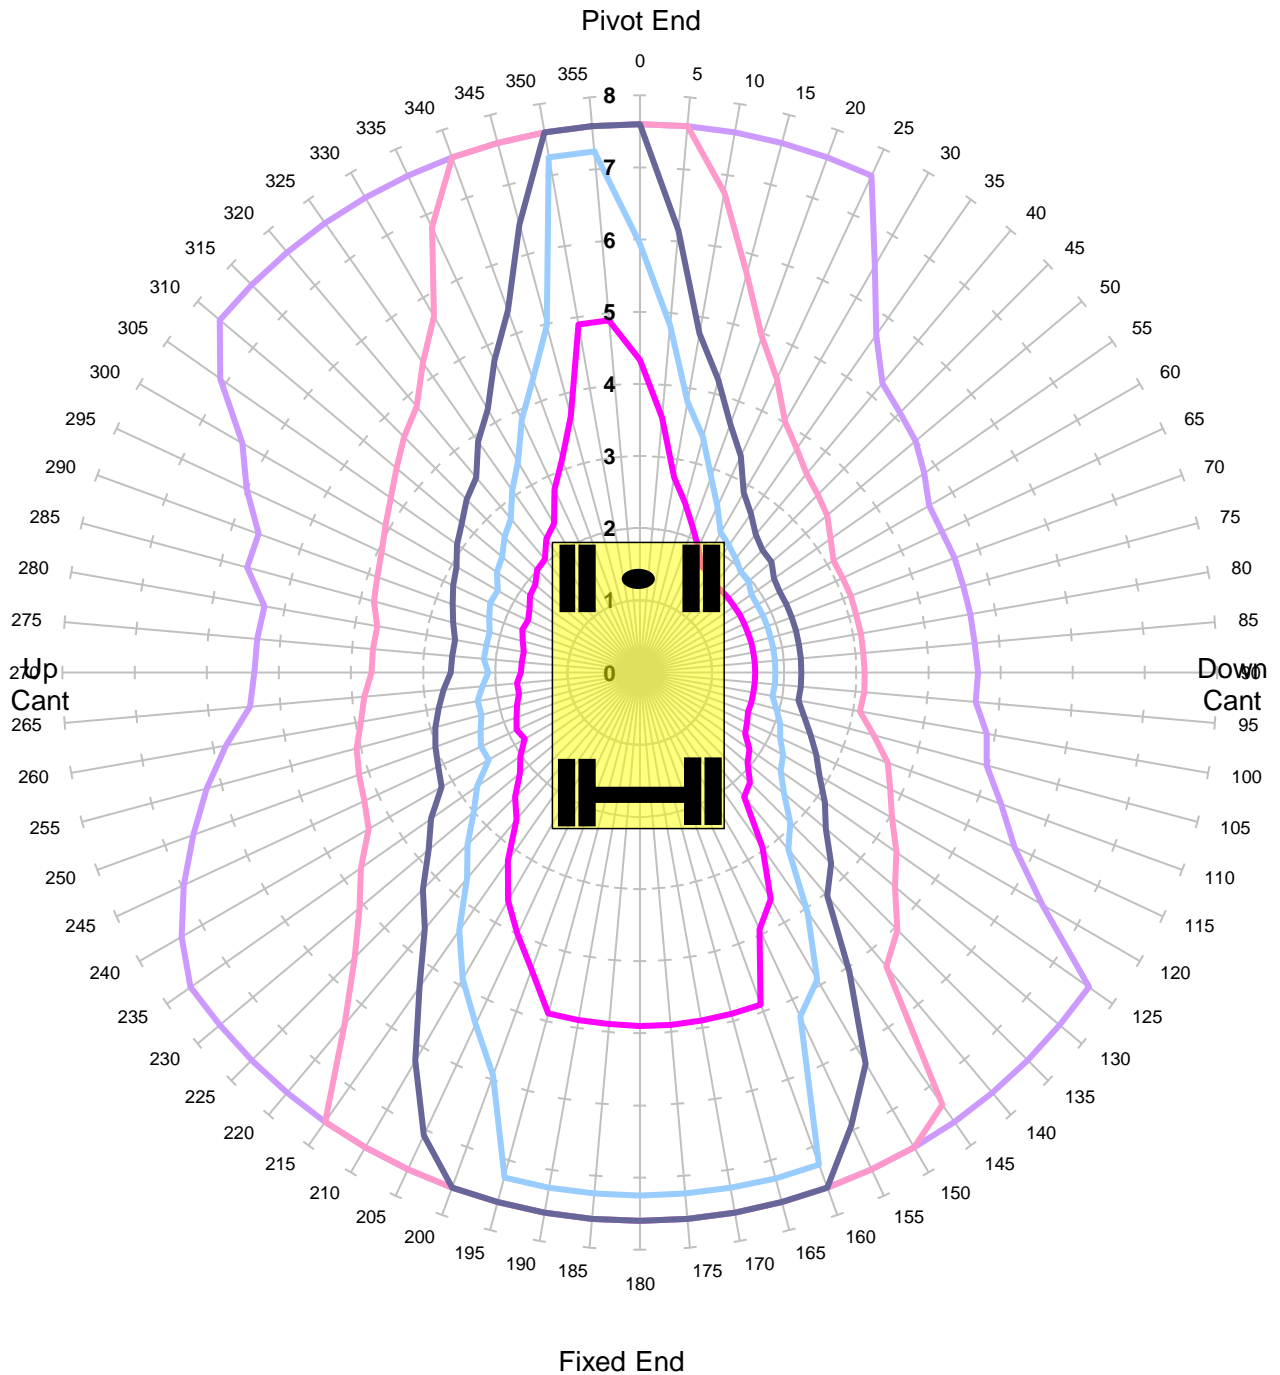


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	67.0%
COMMENT:			

Komatsu PW160
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift BP
Unlocked Rail Cant 50mm

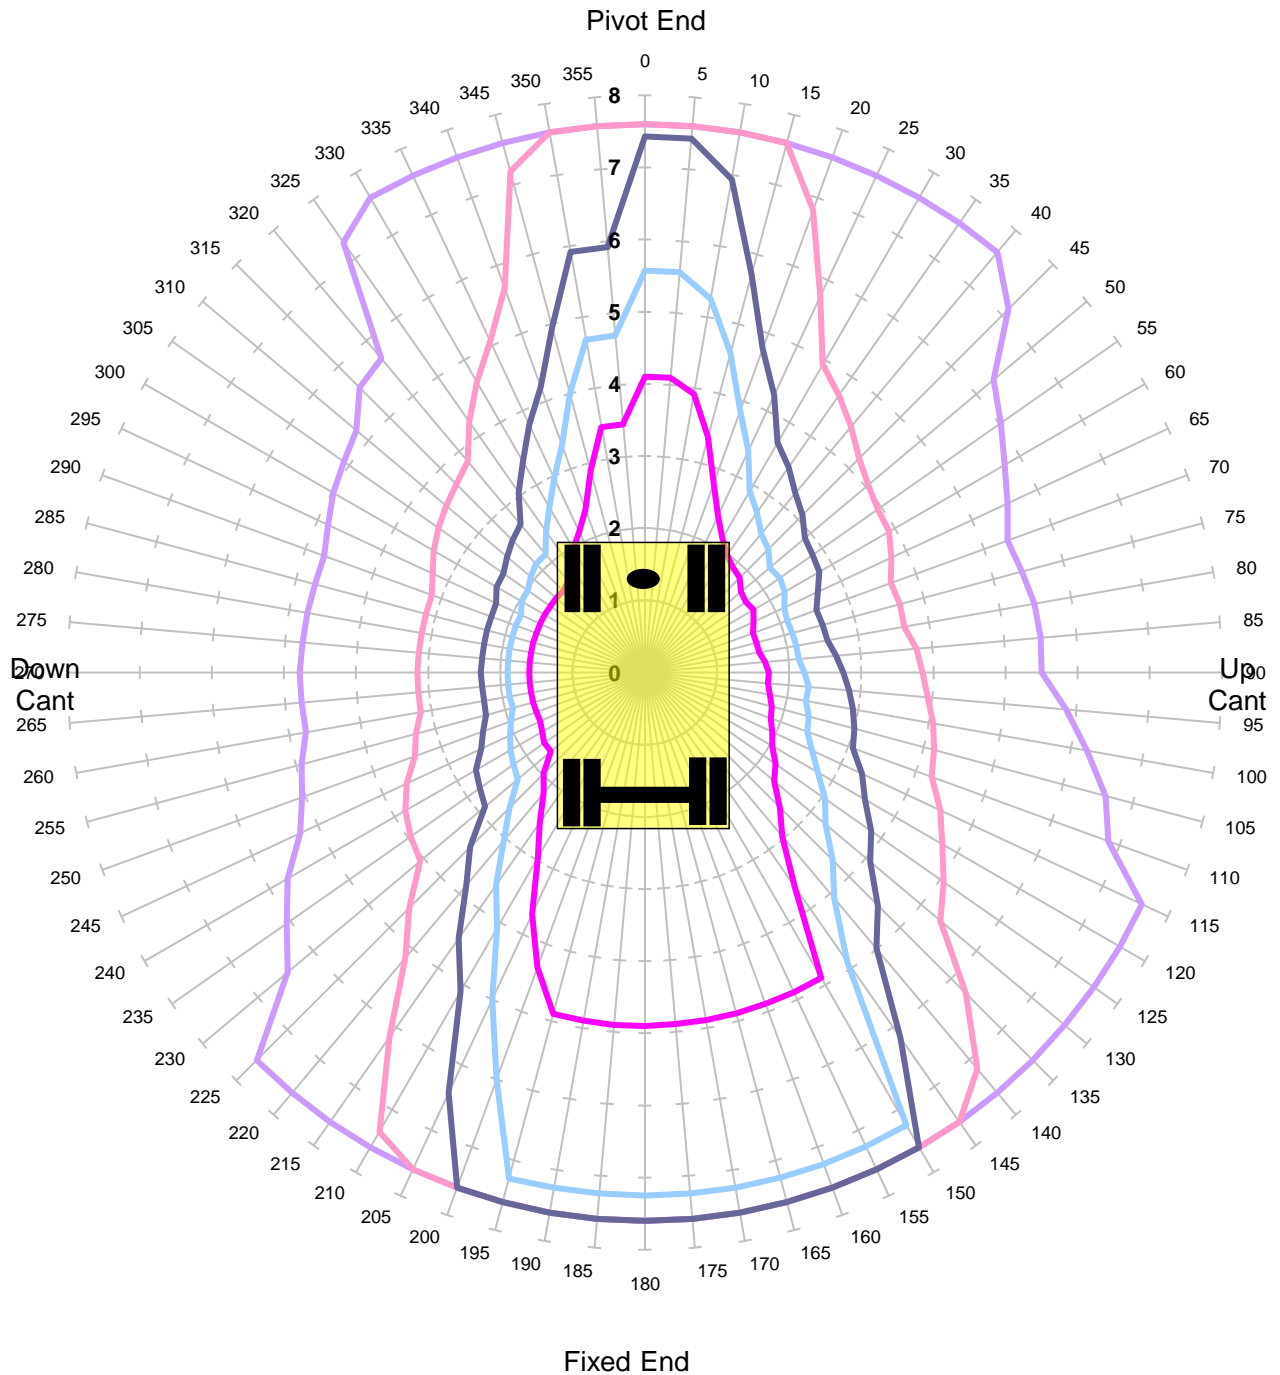


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	67.0%
COMMENT:			

Komatsu PW160
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift BP
Unlocked Rail Cant 150mm

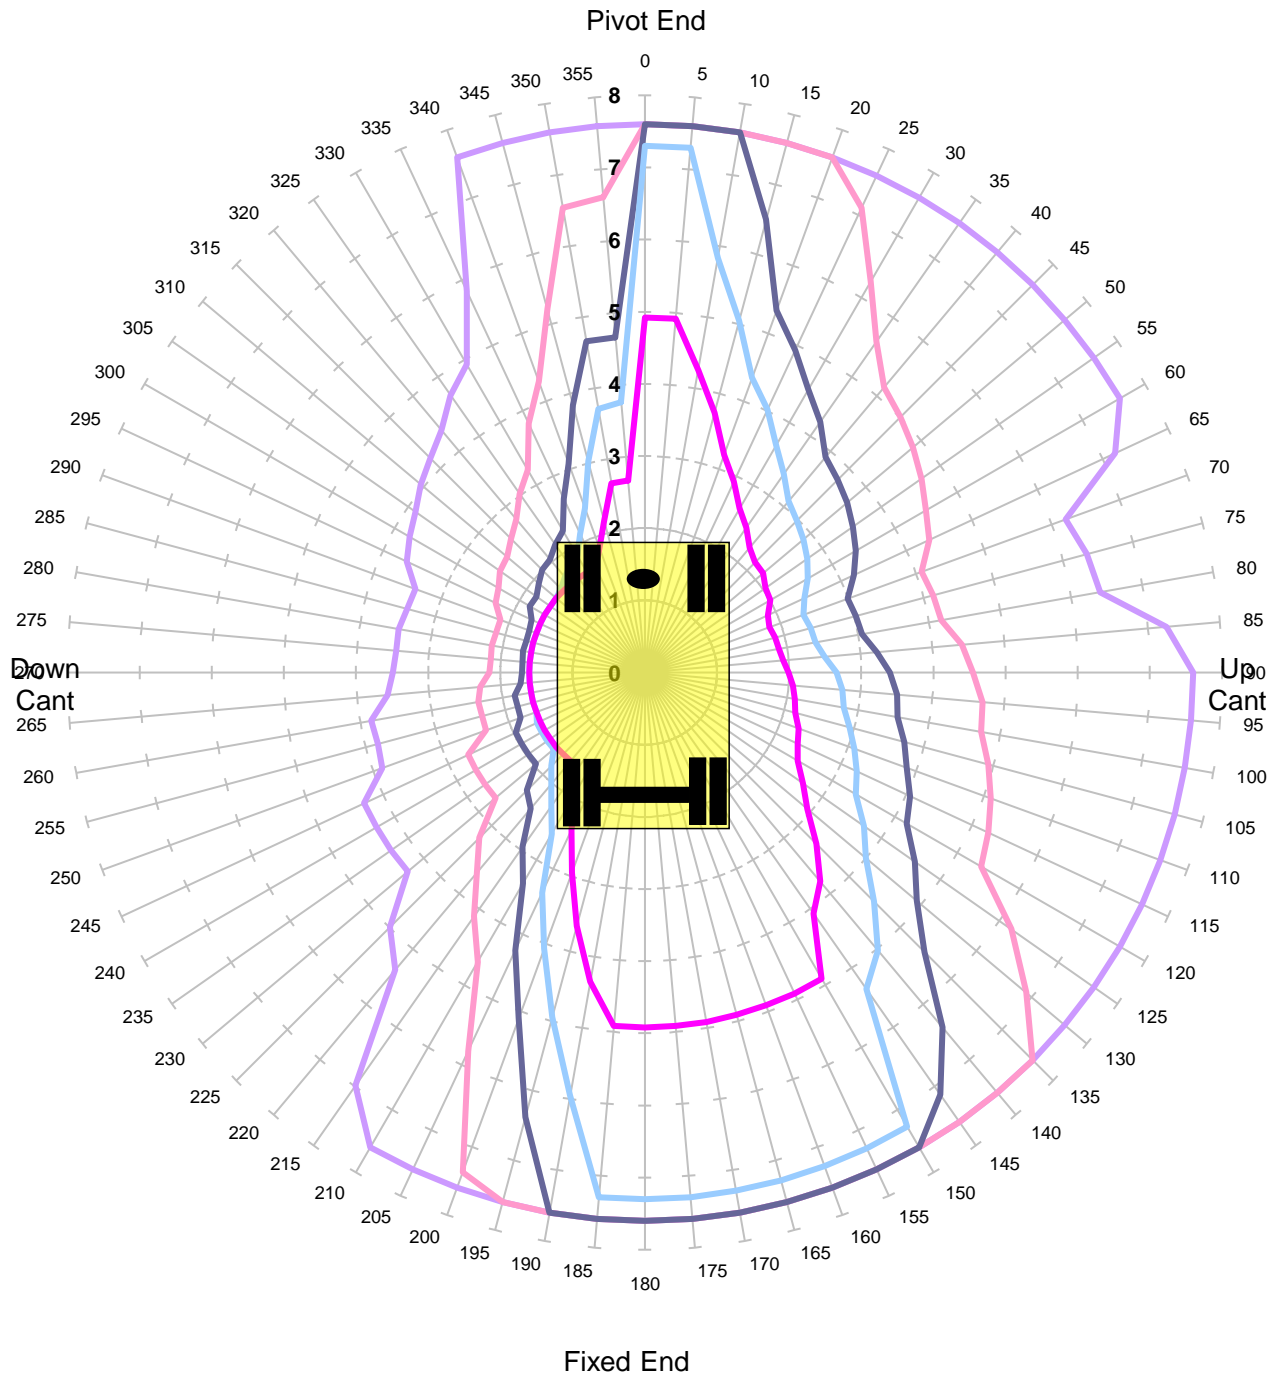


Units in Tonnes

- 1
- 2
- 3
- 4
- 6


MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	67.0%
COMMENT:			

Komatsu PW160
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift BP
Locked Rail Cant -150mm

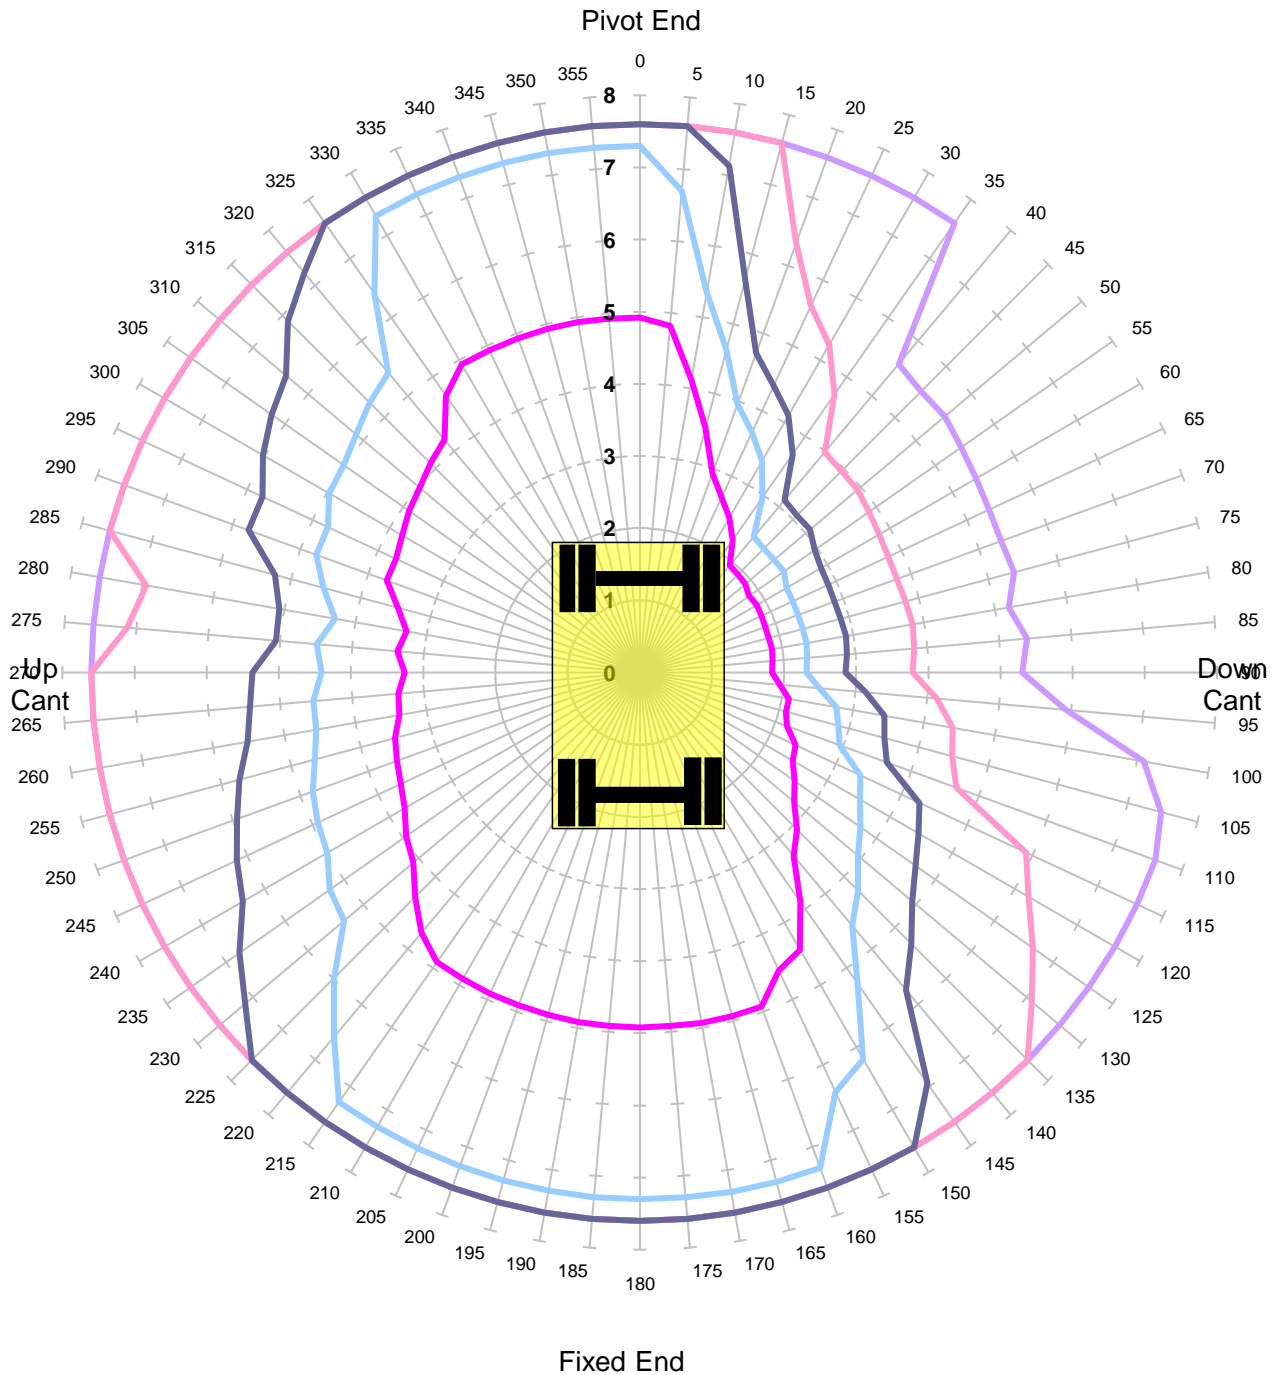

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	90.0%
COMMENT:			

Komatsu PW160
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift BP
Locked Rail Cant -50mm

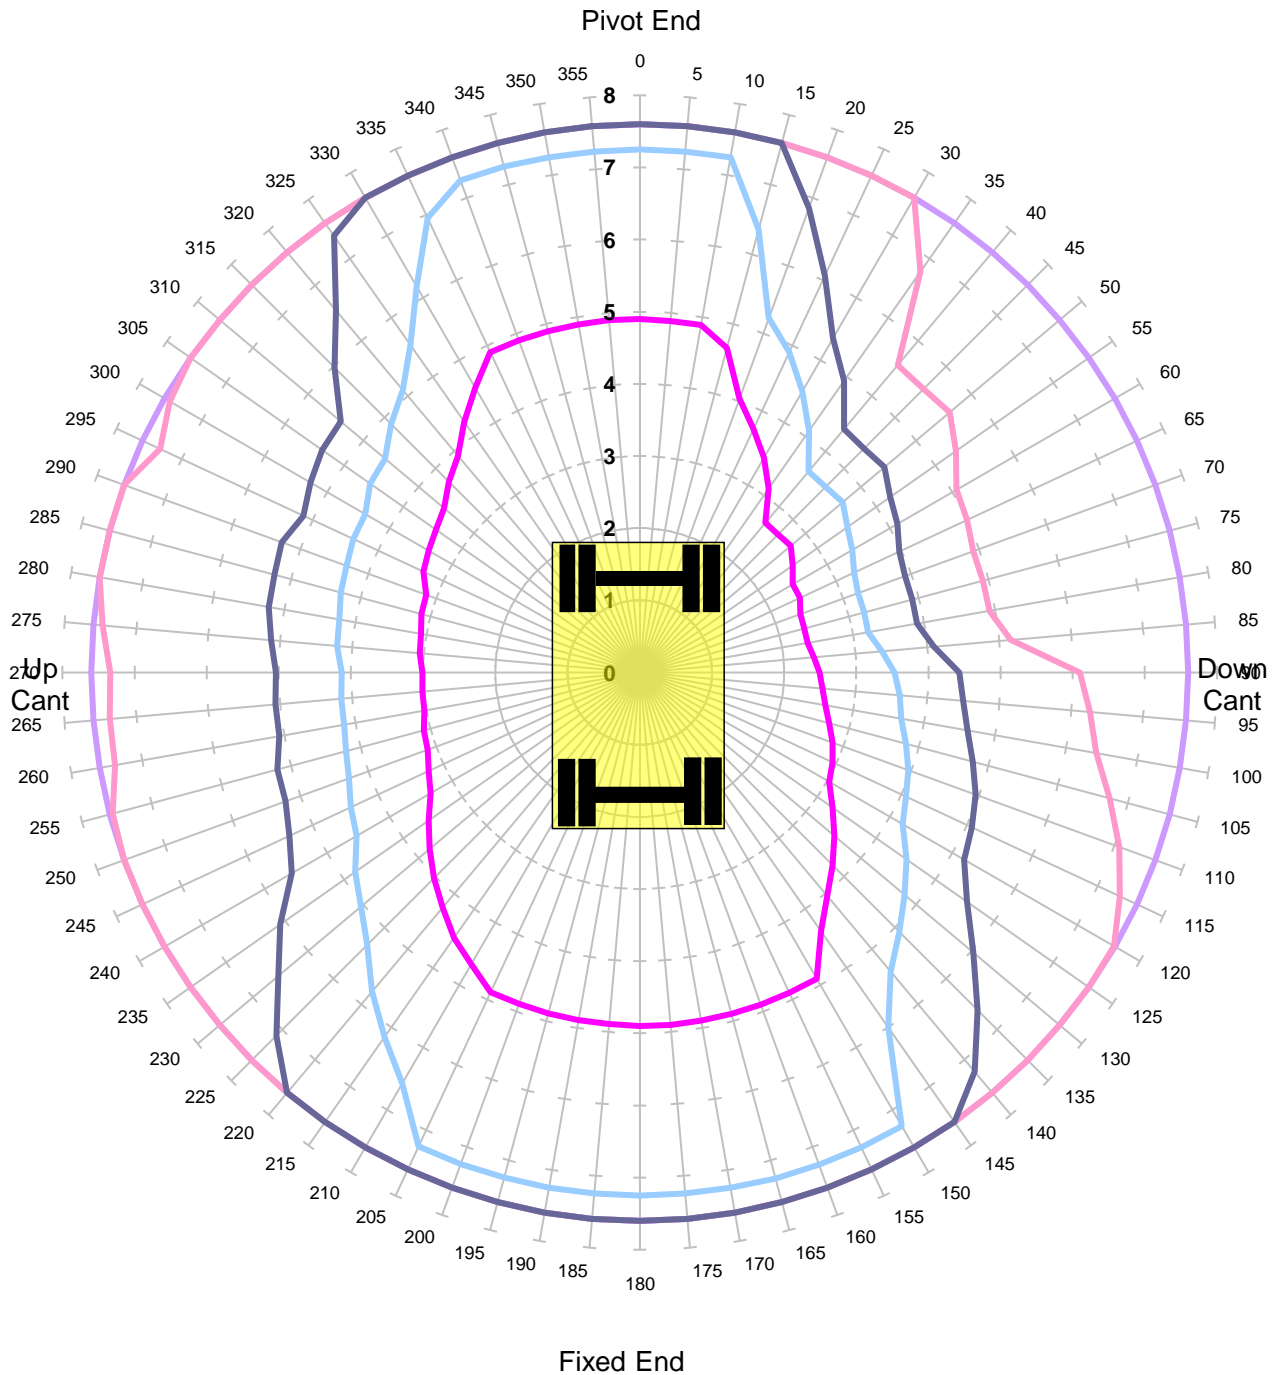


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	90.0%
COMMENT:			

Komatsu PW160
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift BP
Locked Rail Cant 50mm

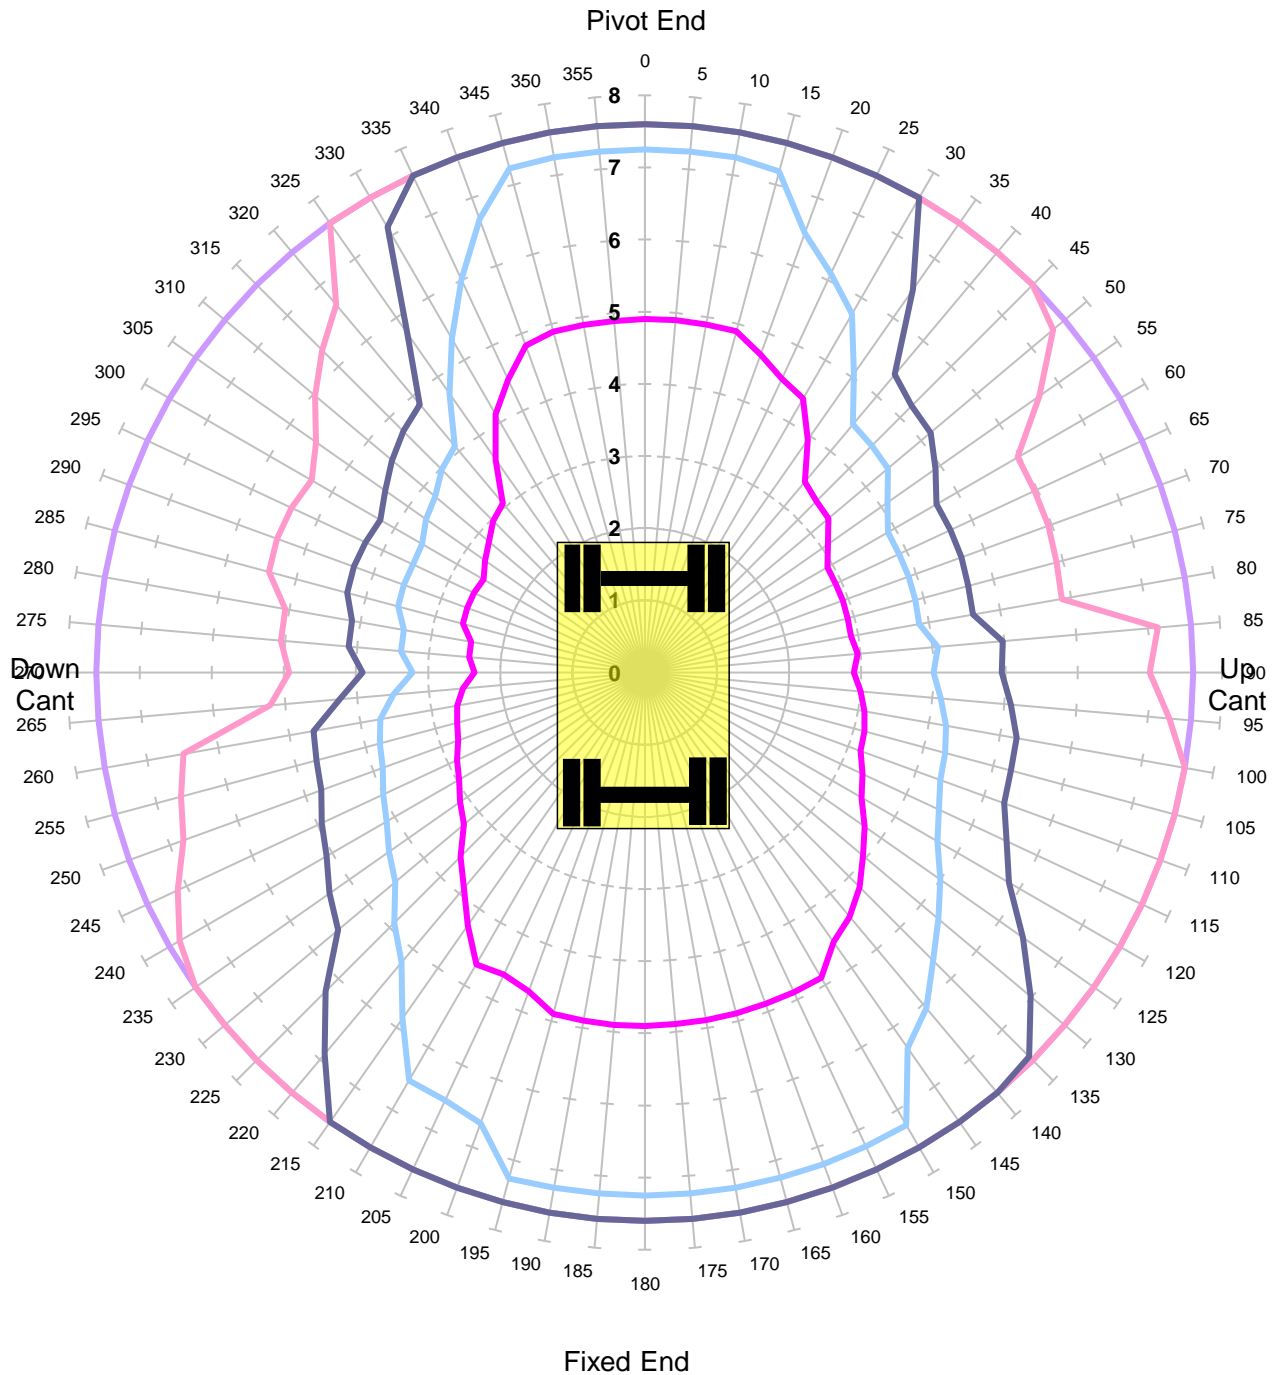


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	90.0%
COMMENT:			

Komatsu PW160
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift BP
Locked Rail Cant 150mm

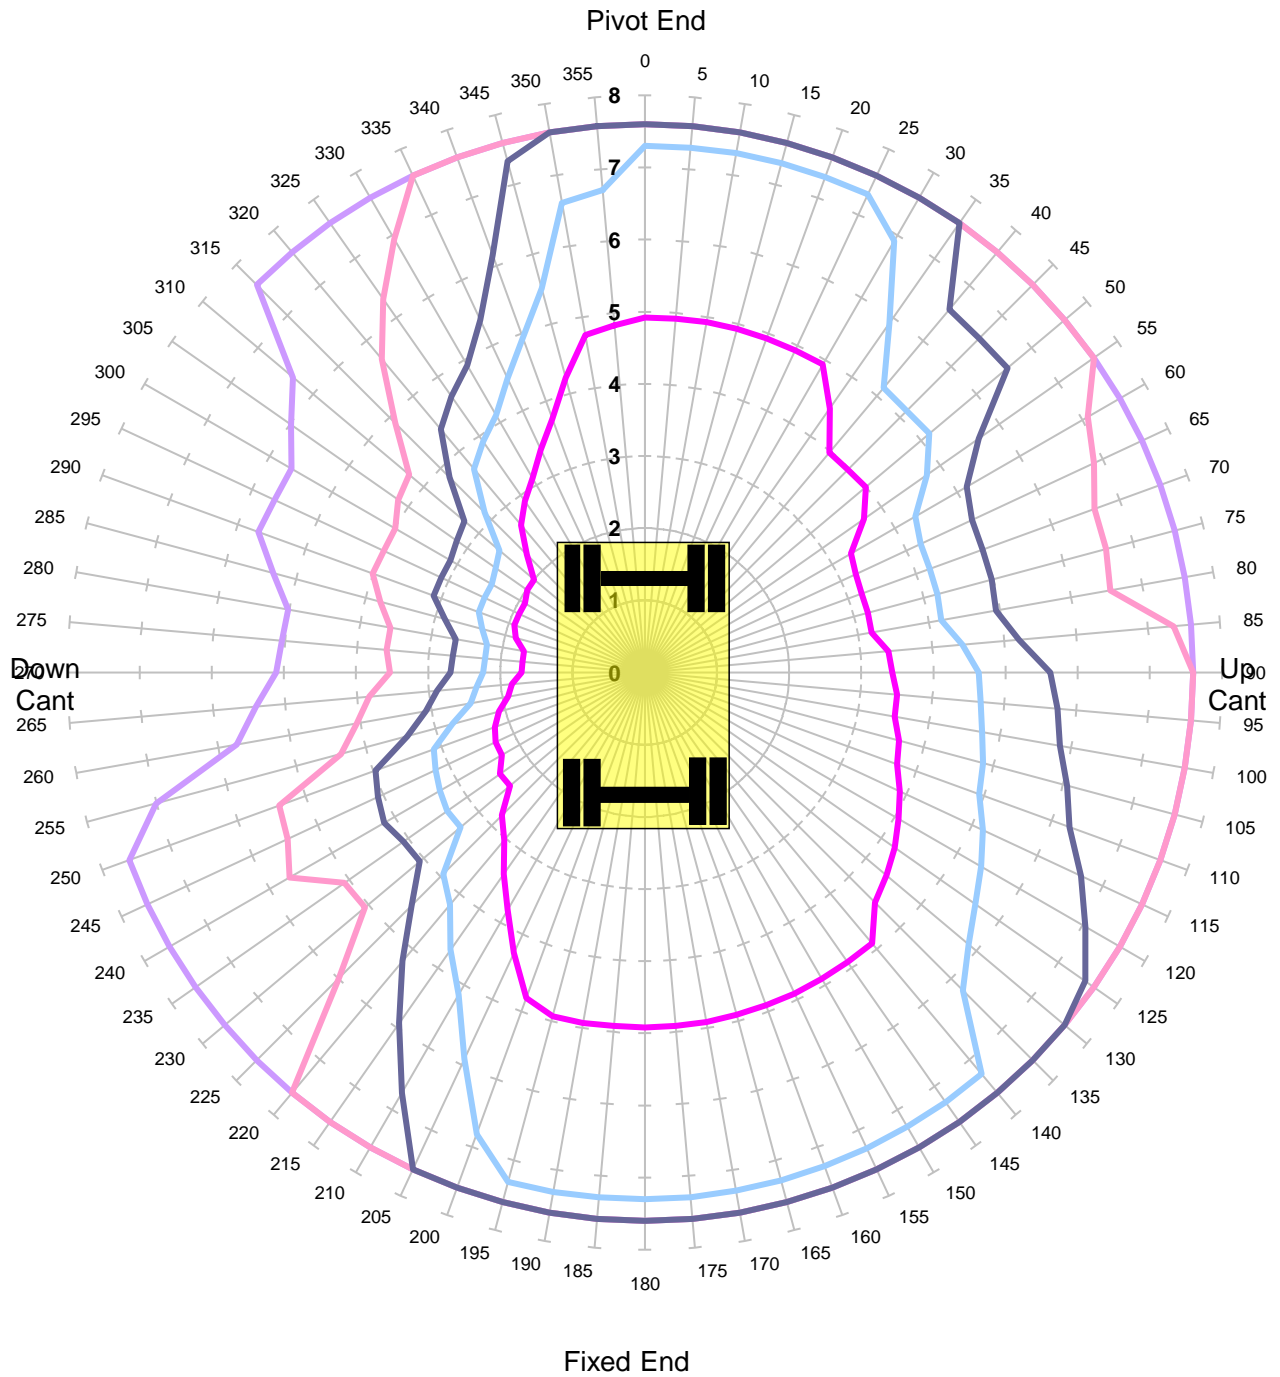


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	90.0%
COMMENT:			

Komatsu PW160
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Level Ground Height 2m Lift BP
Unlocked Road

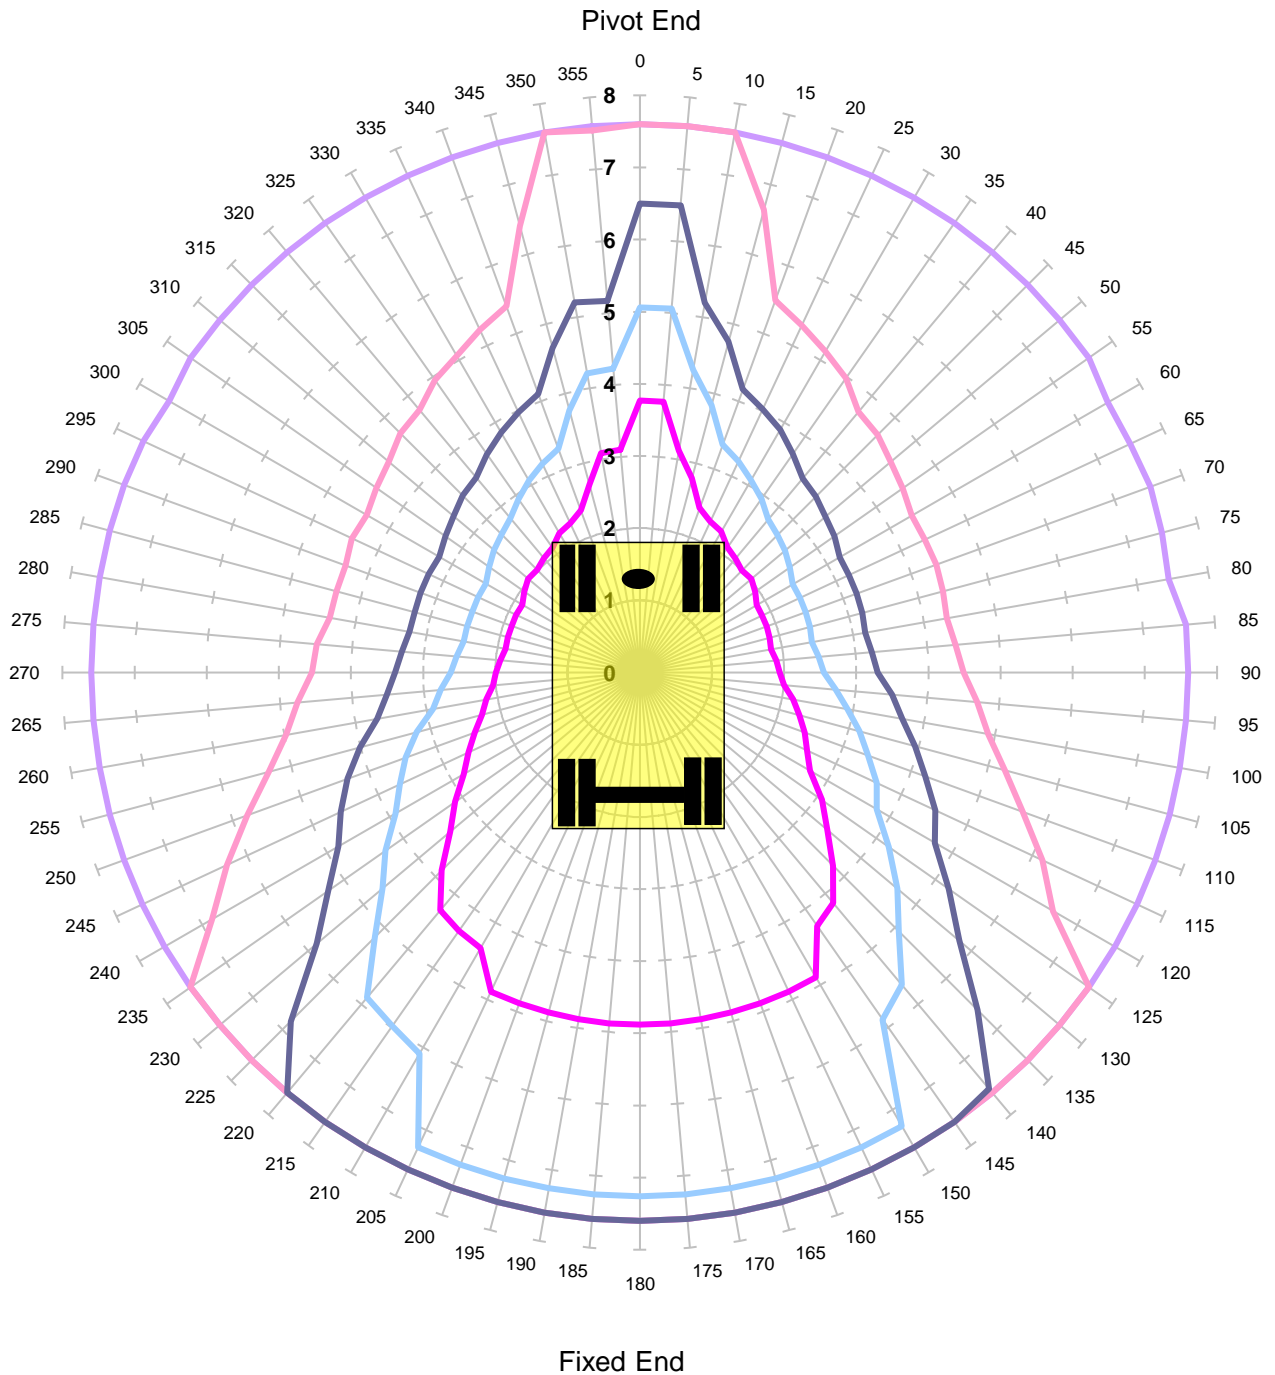


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	71.0%
COMMENT:			

Komatsu PW160
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Level Ground Height 2m Lift BP
Locked Road

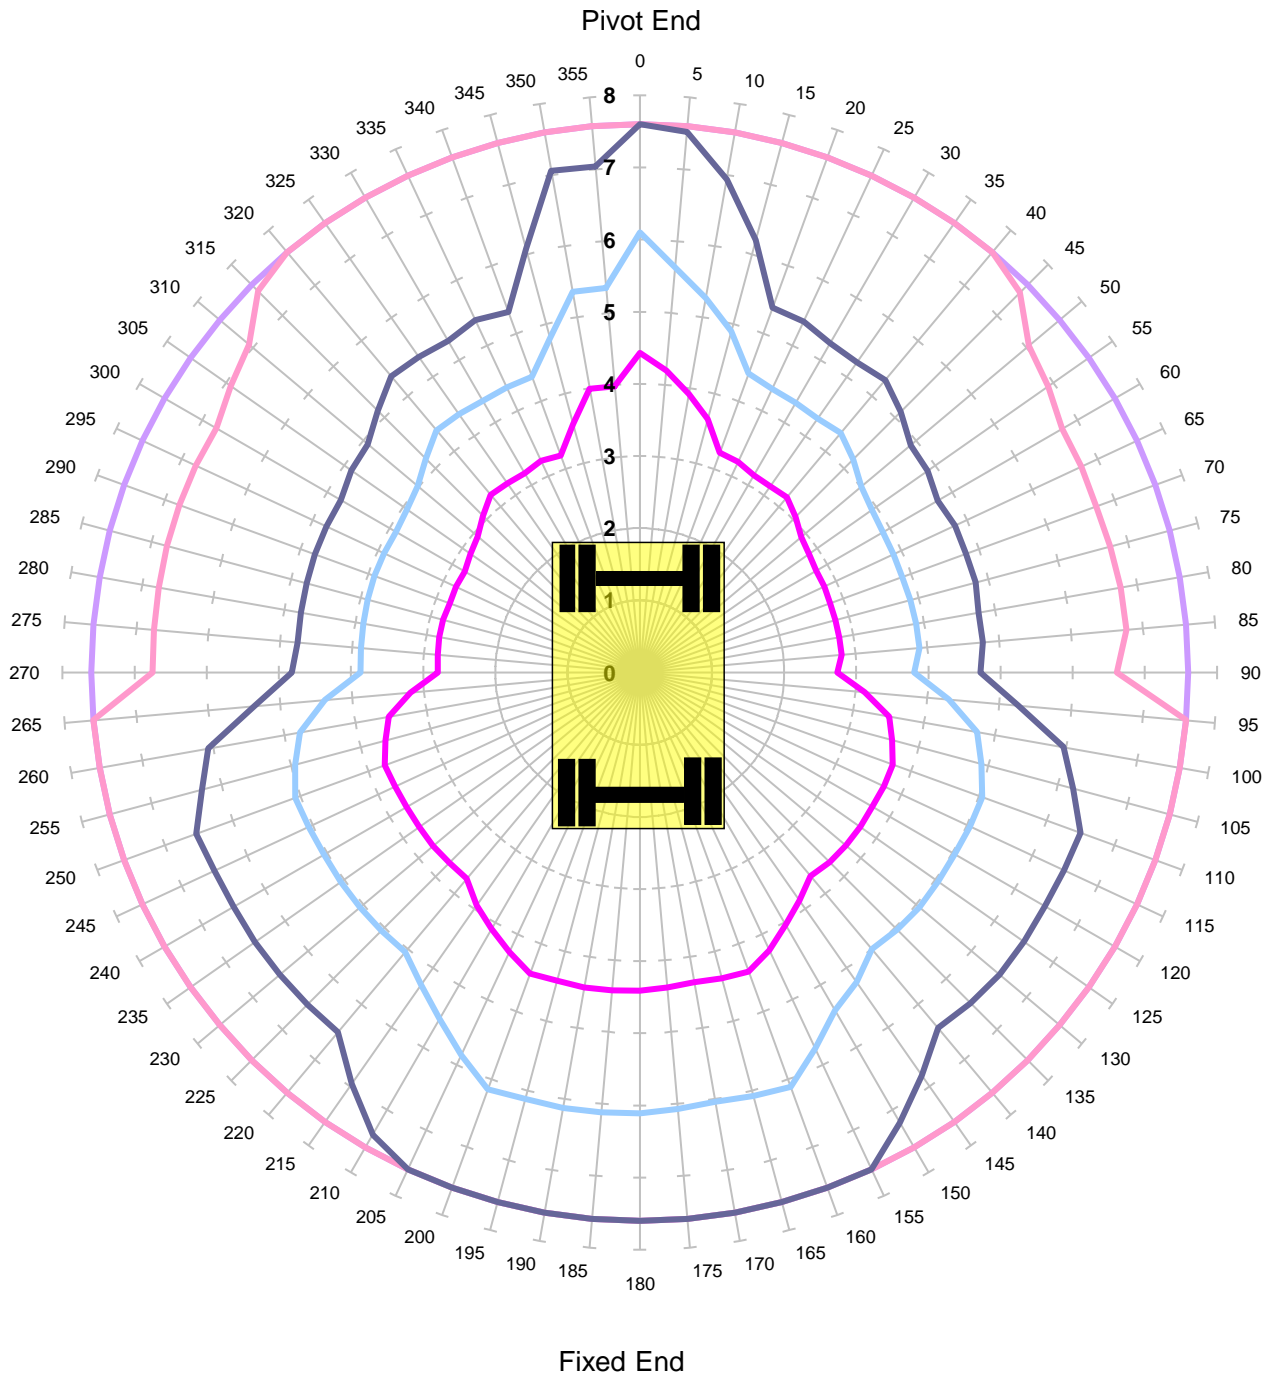

Units in Tonnes


— 1 — 2 — 3 — 4 — 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	71.0%
COMMENT:			

Komatsu PW160

**Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Unlocked Rail Cant -150mm - Tandem Lift

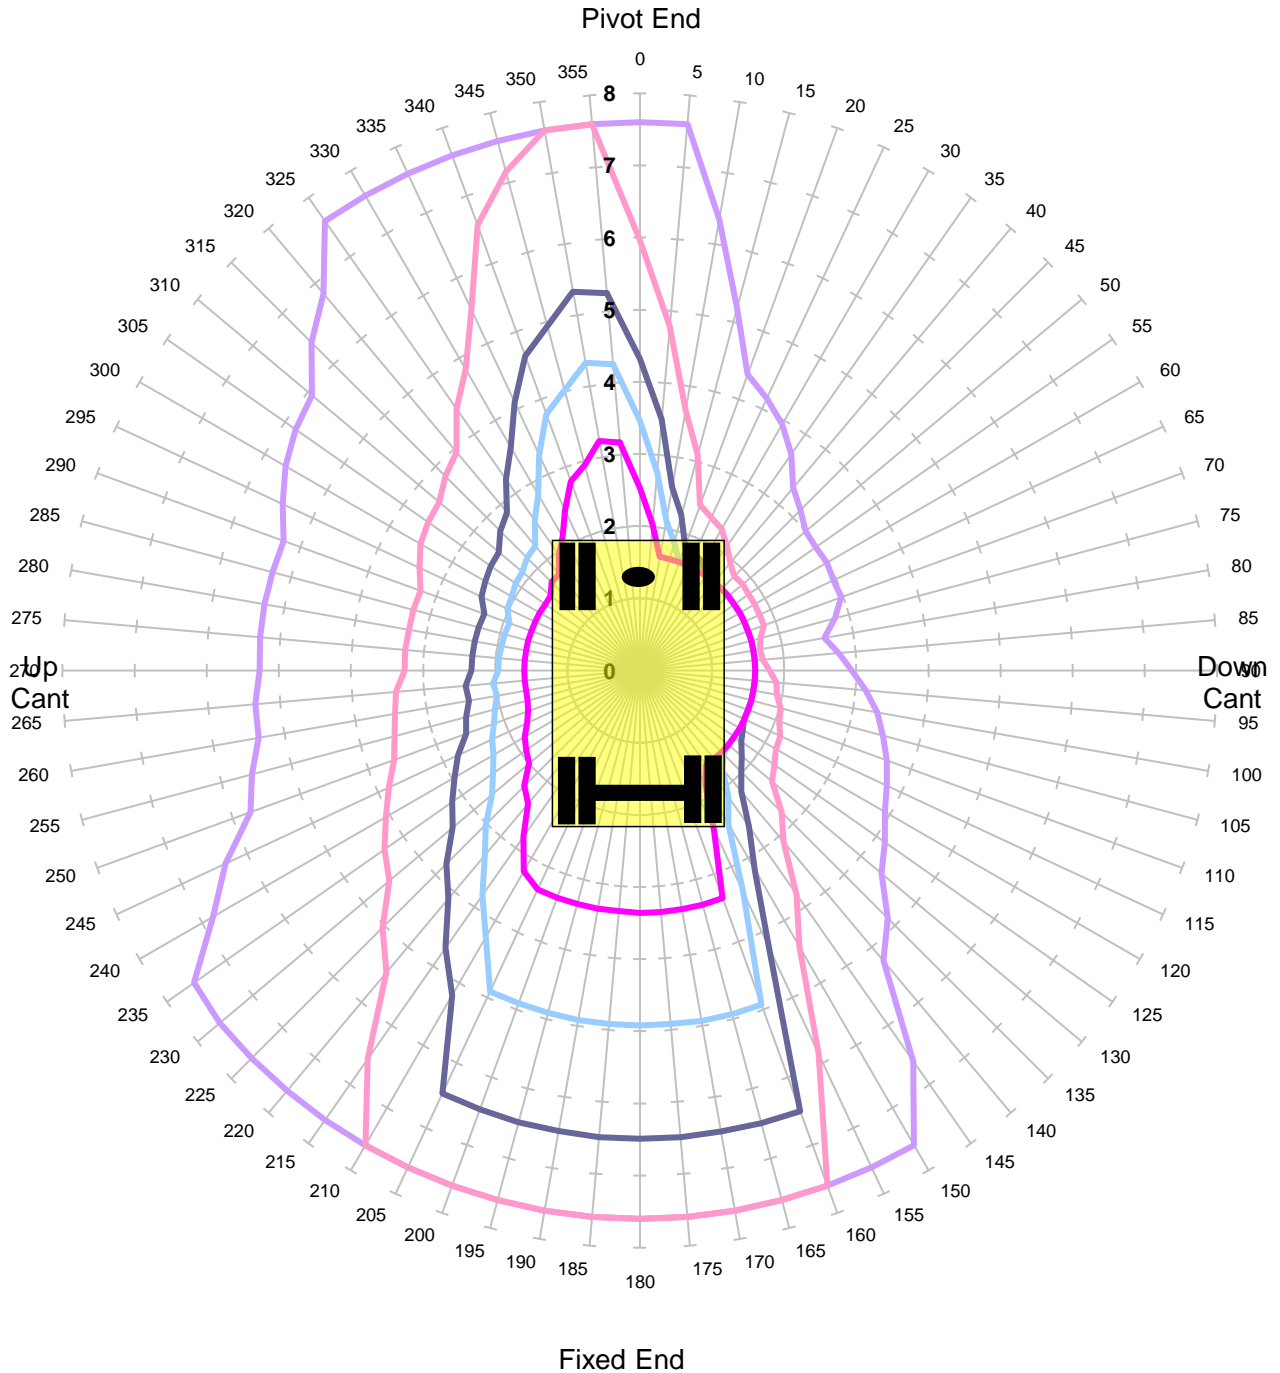


Units in Tonnes

- 1
- 2
- 3
- 4
- 6


MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	45.0%
COMMENT:			

Komatsu PW160
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift BP
Unlocked Rail Cant -50mm - Tandem Lift

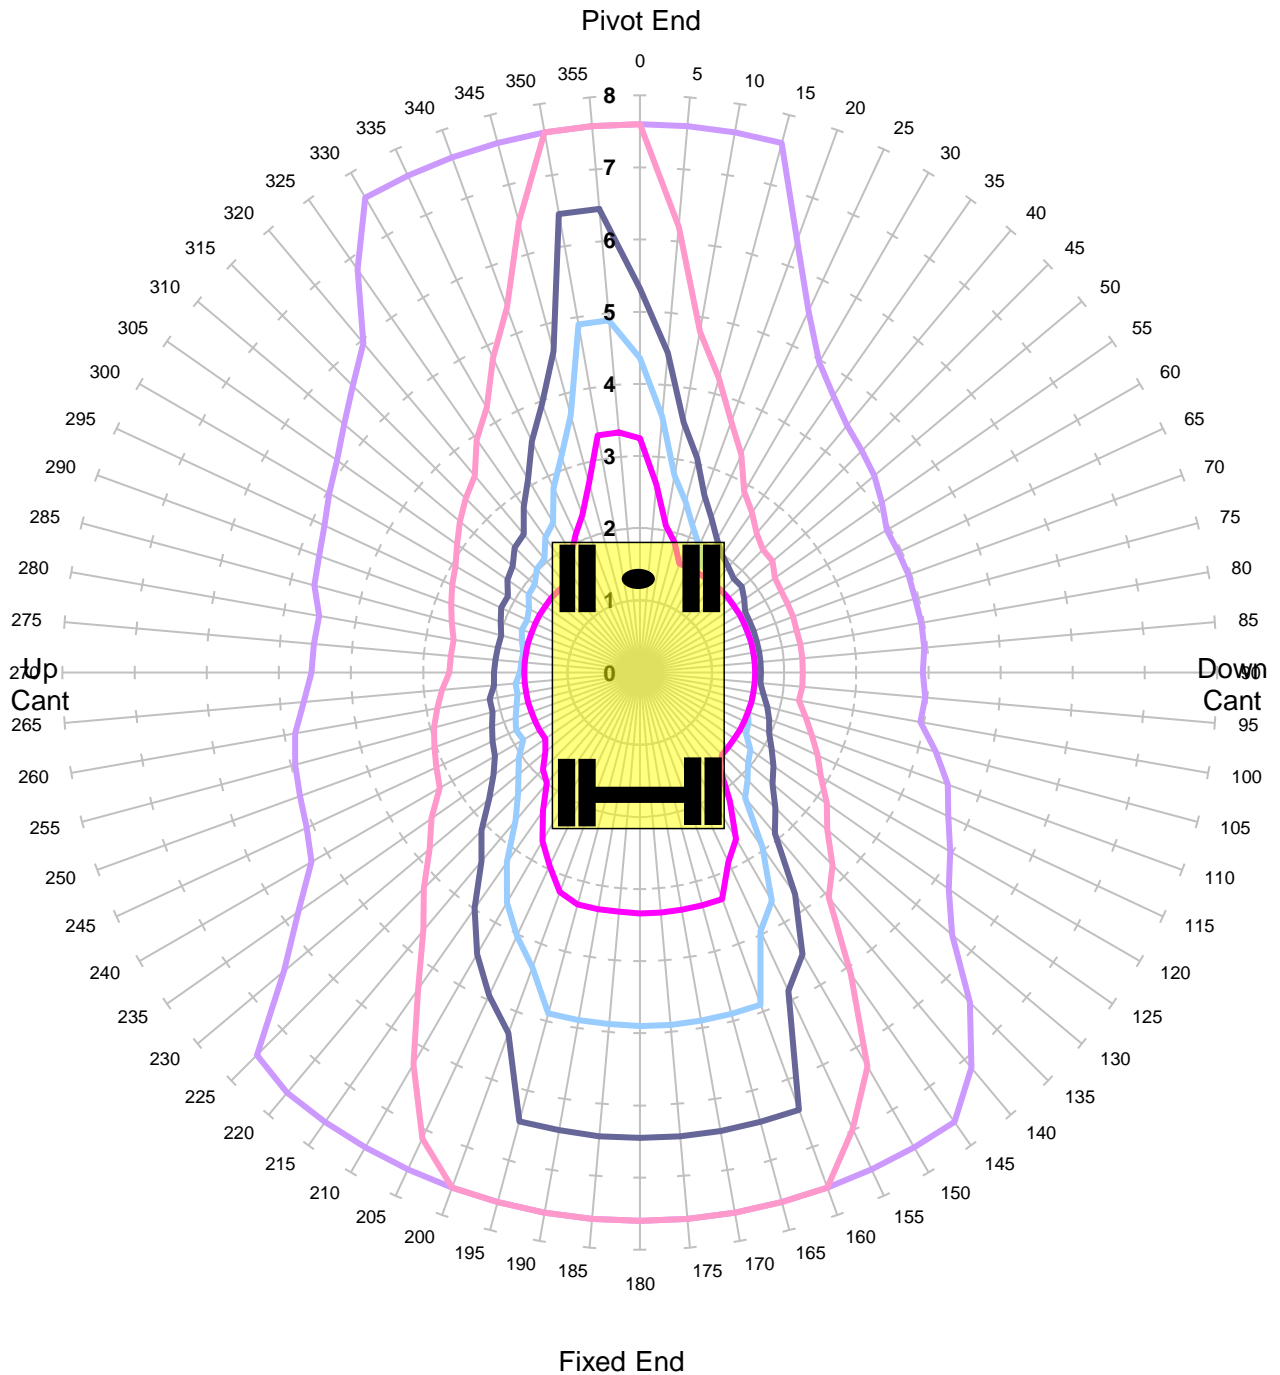

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	45.0%
COMMENT:			

Komatsu PW160
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift BP
Unlocked Rail Cant 50mm - Tandem Lift

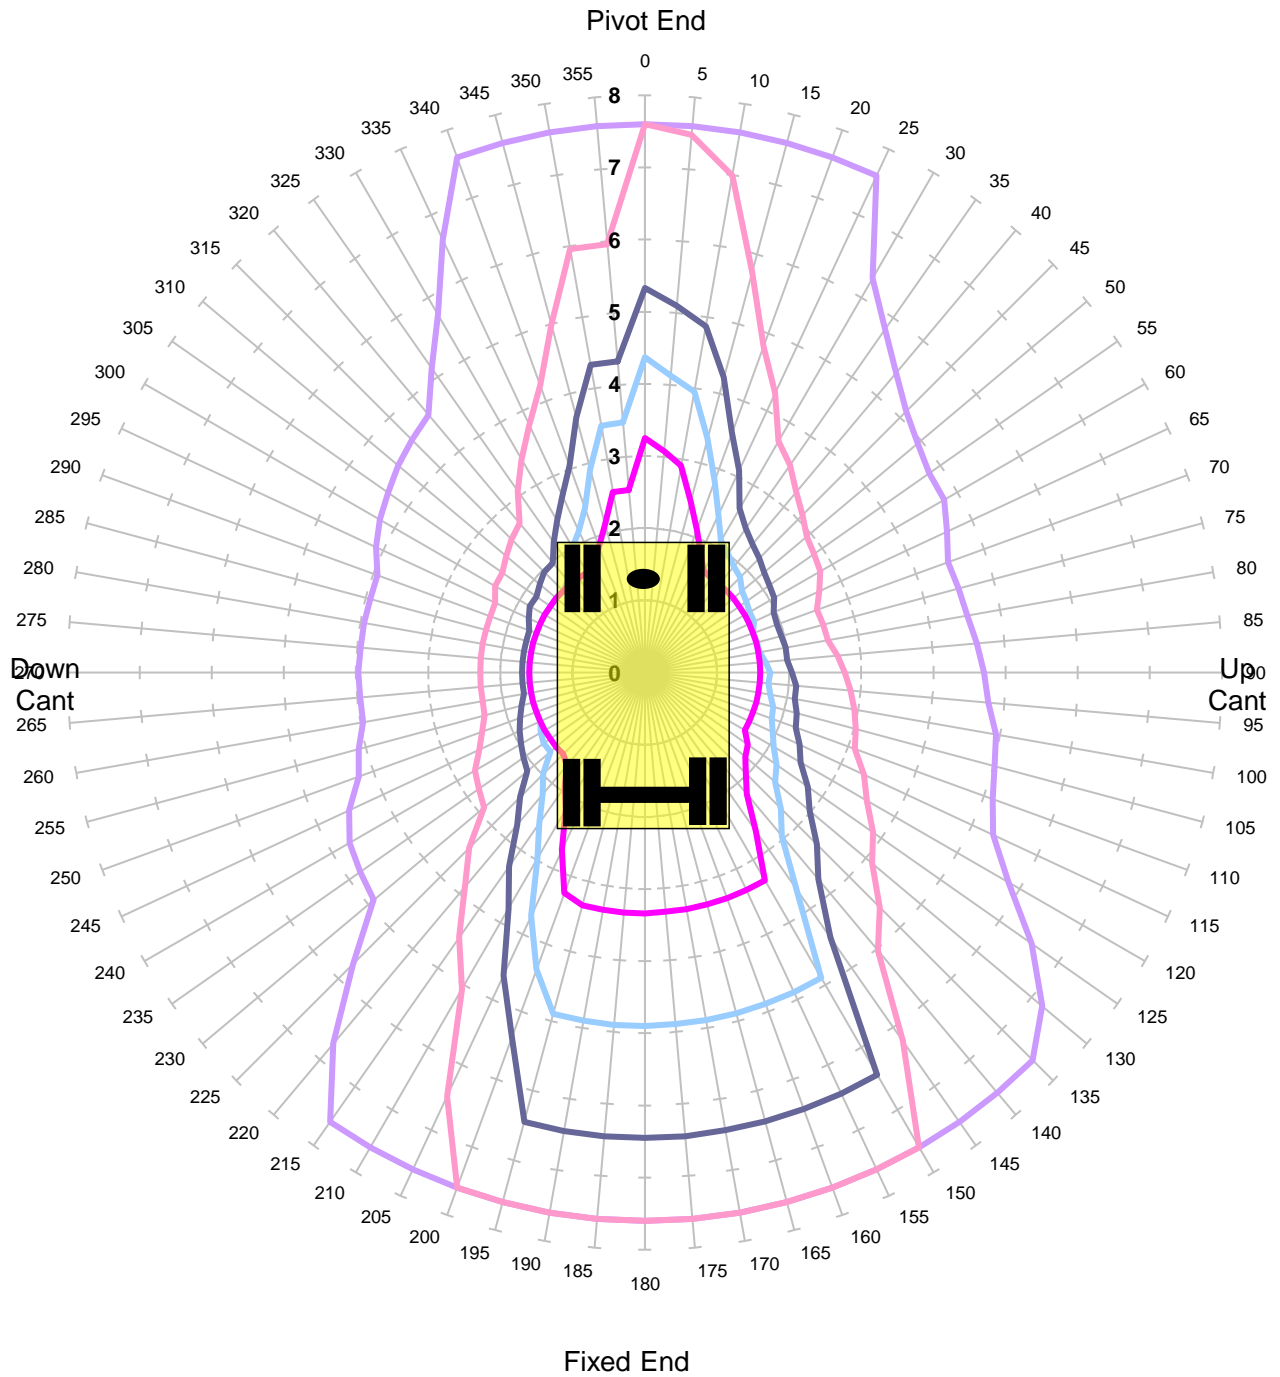


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	45.0%
COMMENT:			

Komatsu PW160
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift BP
Unlocked Rail Cant 150mm - Tandem Lift

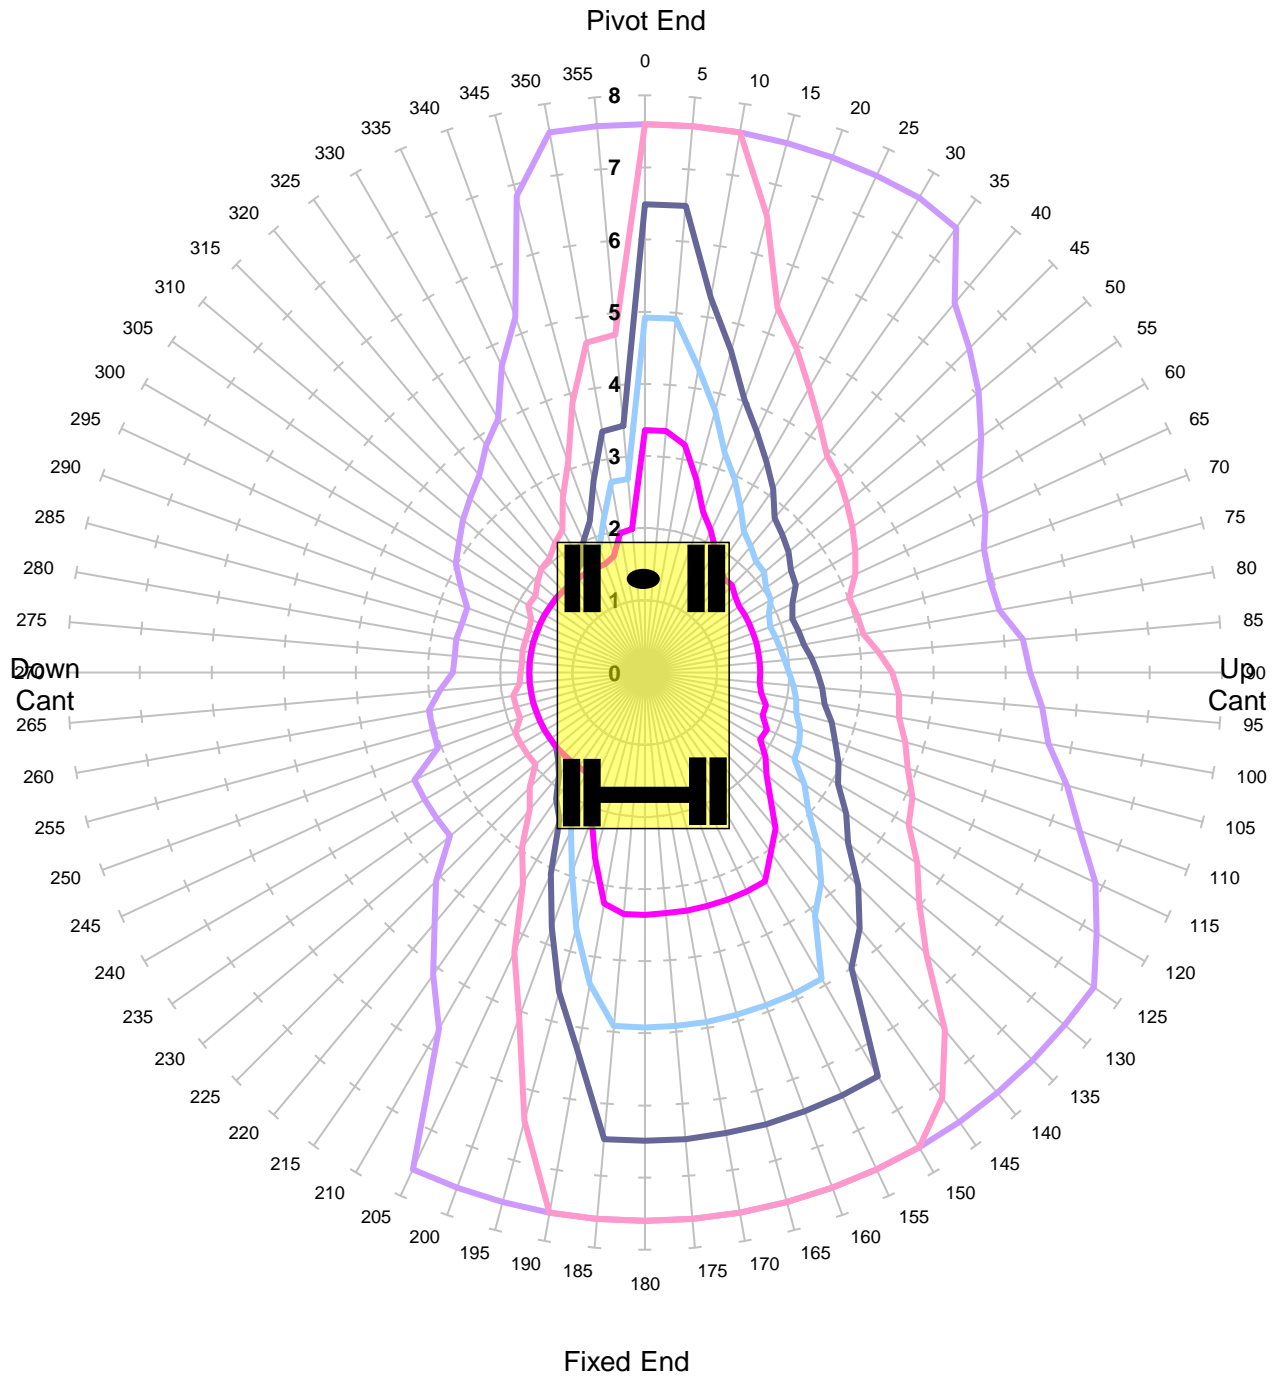


MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	45.0%
COMMENT:			

Komatsu PW160

**Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Locked Rail Cant -150mm - Tandem Lift

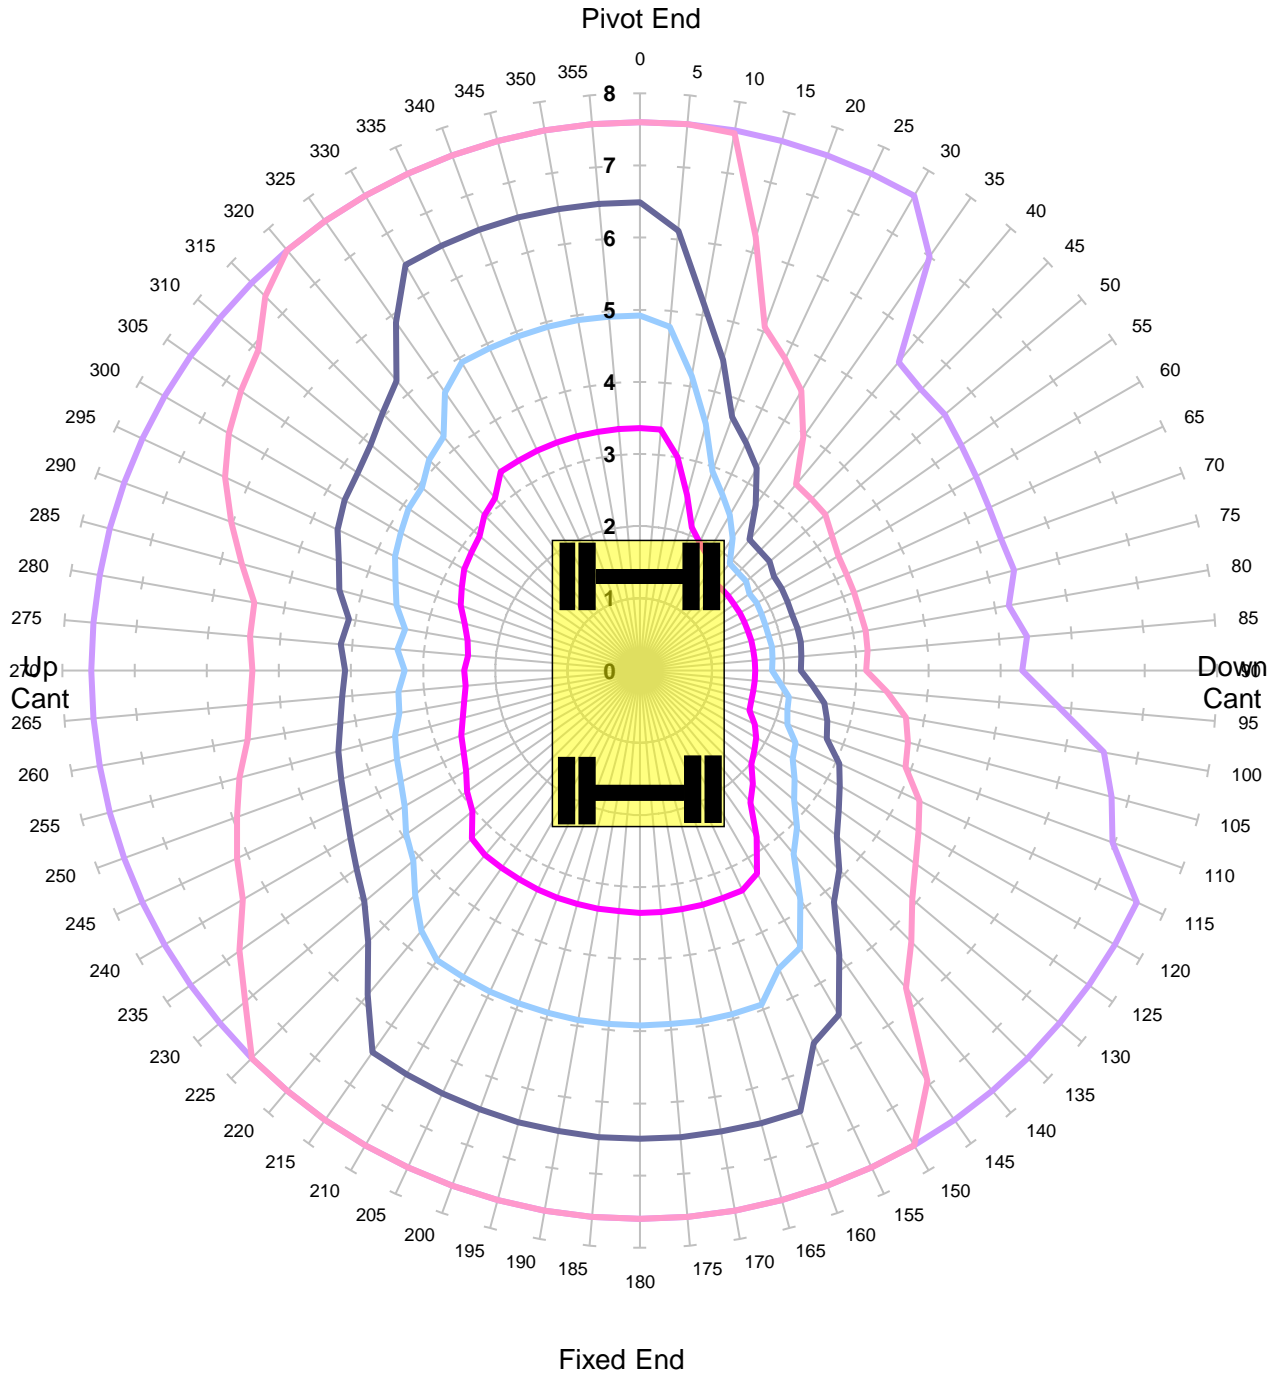

Units in Tonnes


— 1 — 2 — 3 — 4 — 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	60.0%
COMMENT:			

Komatsu PW160

**Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Locked Rail Cant -50mm - Tandem Lift

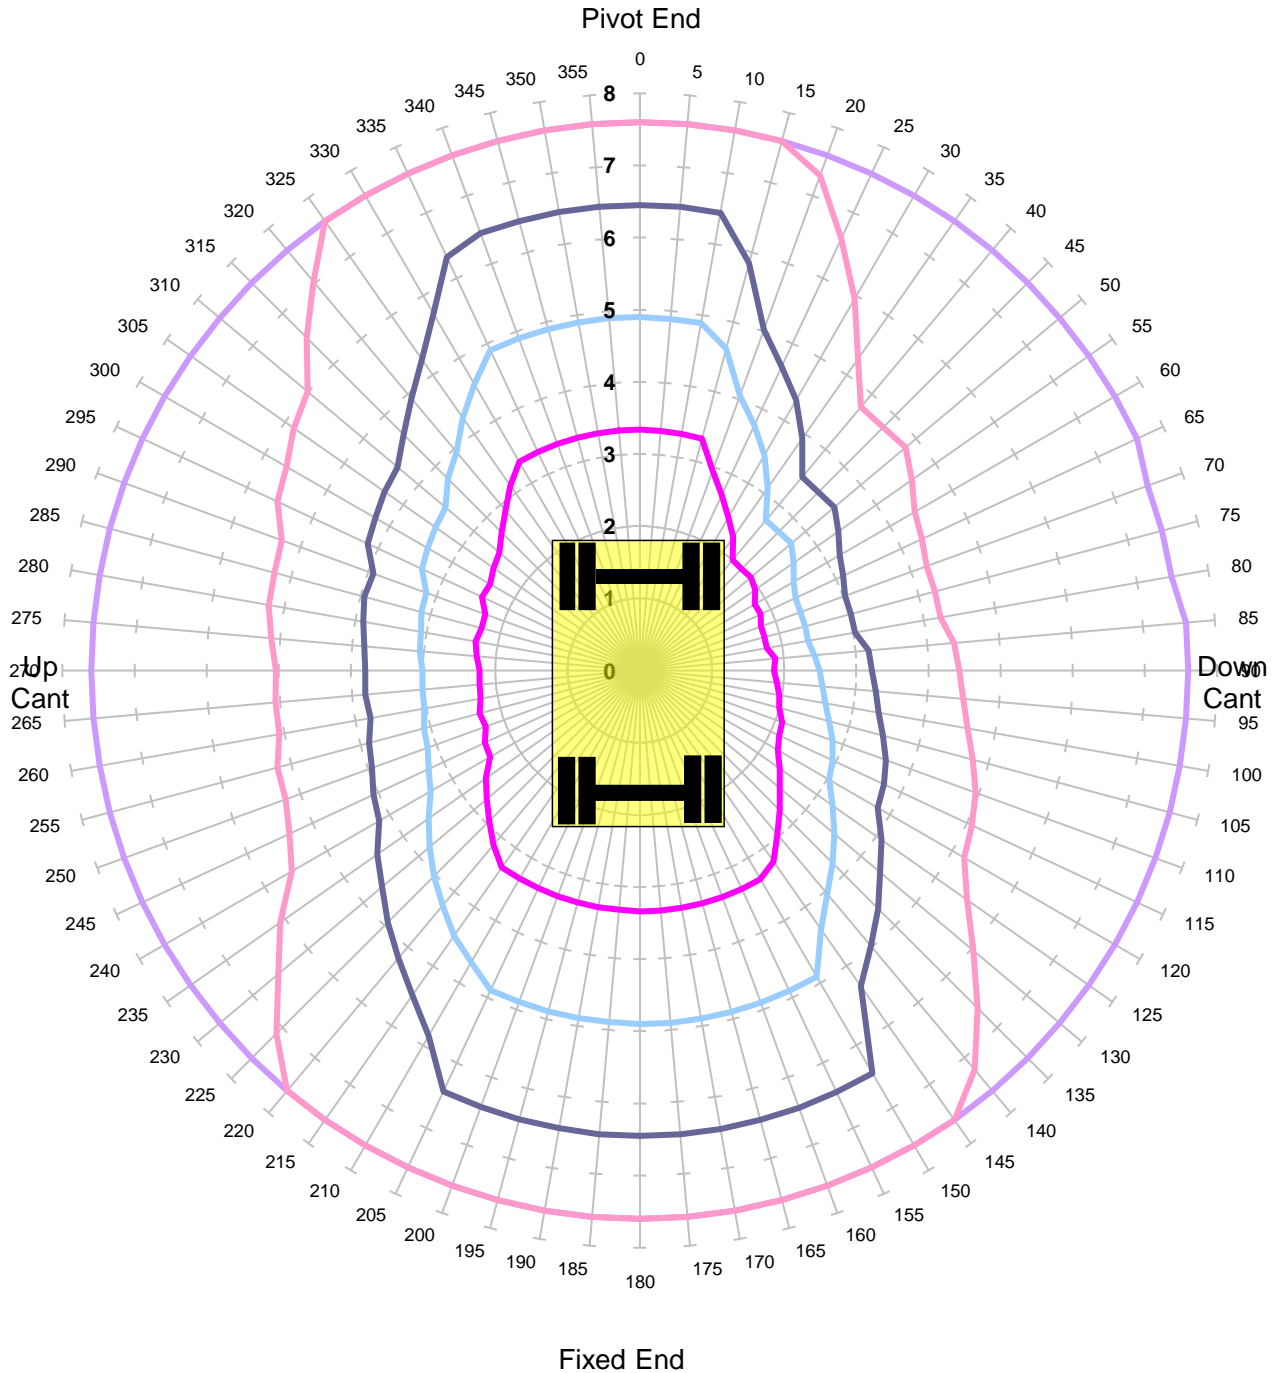

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	60.0%
COMMENT:			

Komatsu PW160

**Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Locked Rail Cant 50mm - Tandem Lift

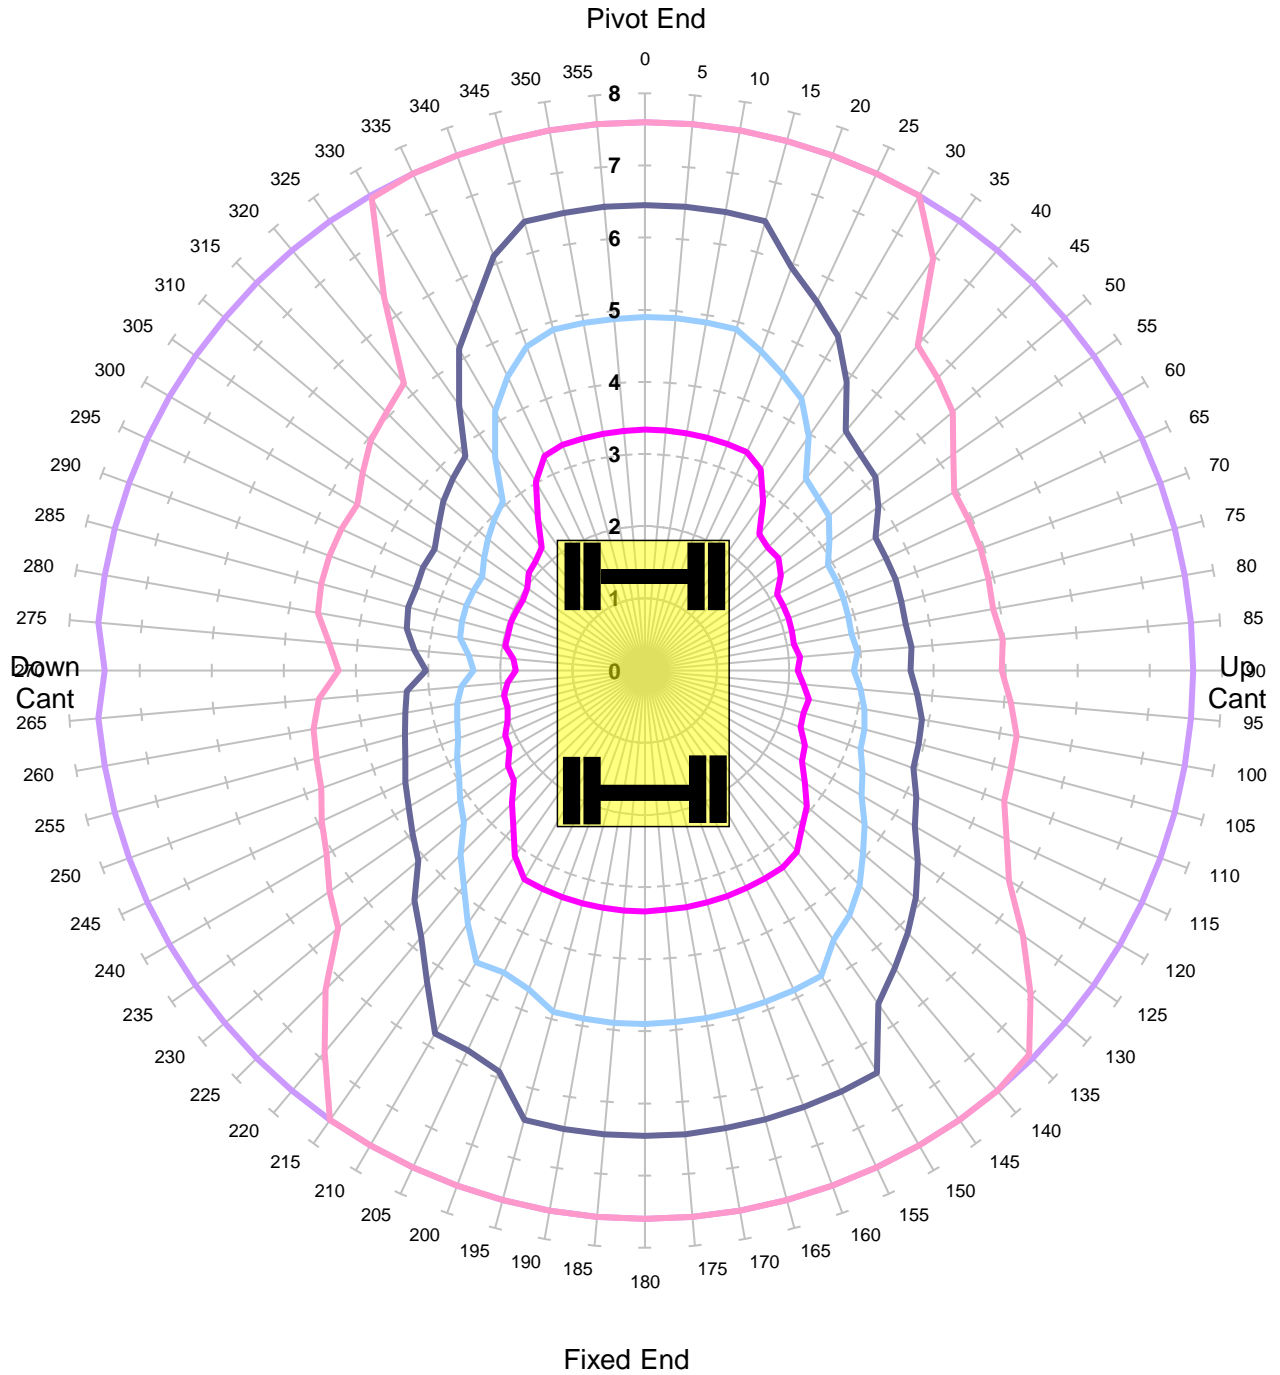

Units in Tonnes


— 1 — 2 — 3 — 4 — 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	60.0%
COMMENT:			

Komatsu PW160

**Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Locked Rail Cant 150mm - Tandem Lift

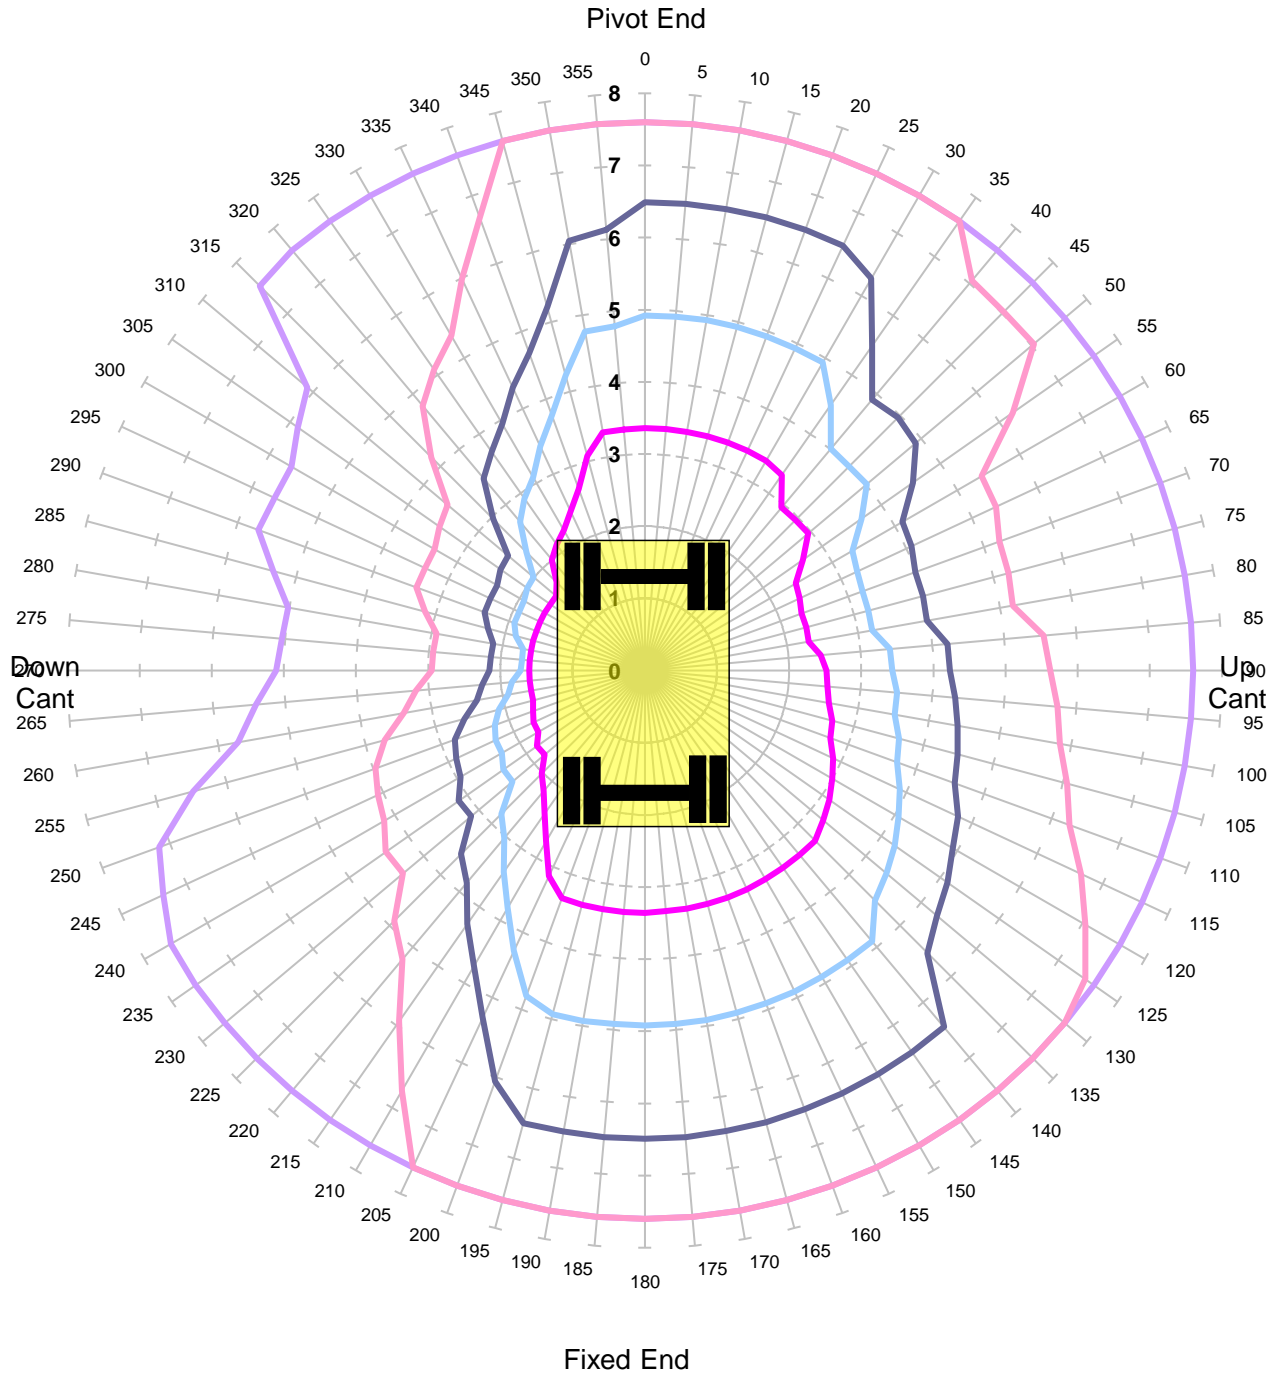


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	60.0%
COMMENT:			

Komatsu PW160
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Level Ground Height 2m Lift BP
Unlocked Road - Tandem Lift

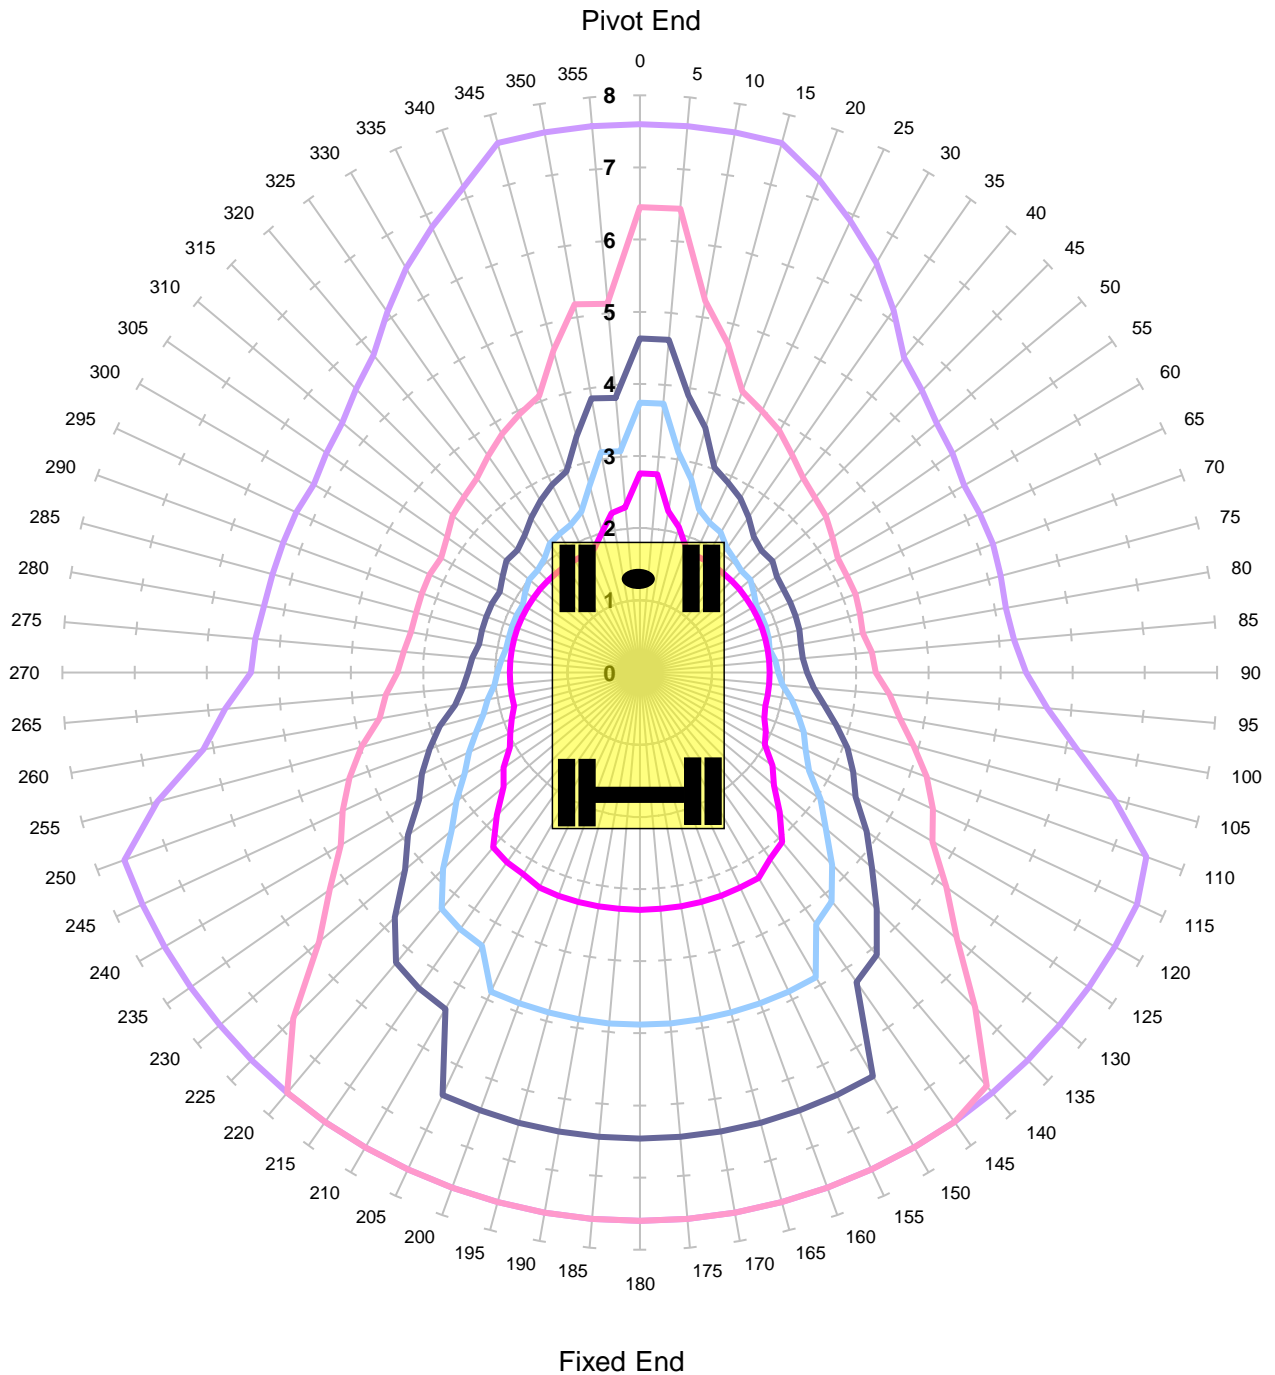


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	47.0%
COMMENT:			

Komatsu PW160
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Level Ground Height 2m Lift BP
Locked Road - Tandem Lift

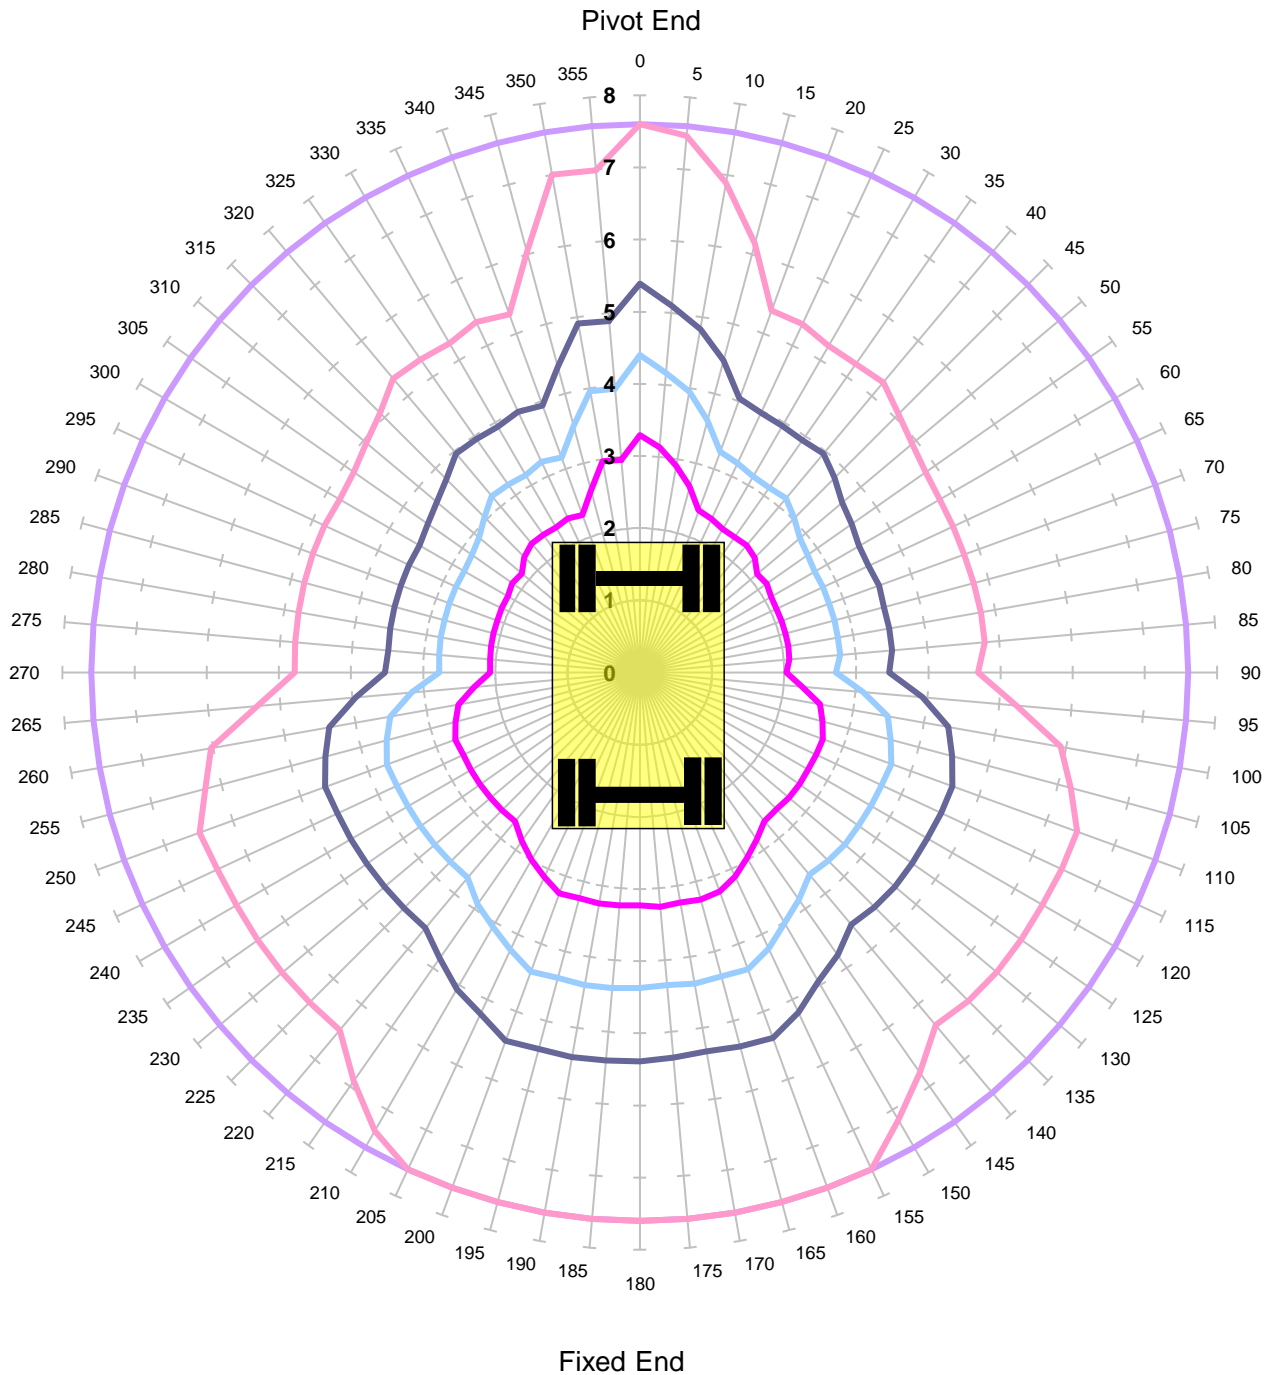


Units in Tonnes

— 1 — 2 — 3 — 4 — 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	47.0%
COMMENT:			

Komatsu PW160
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift QH
Unlocked Rail Cant -150mm

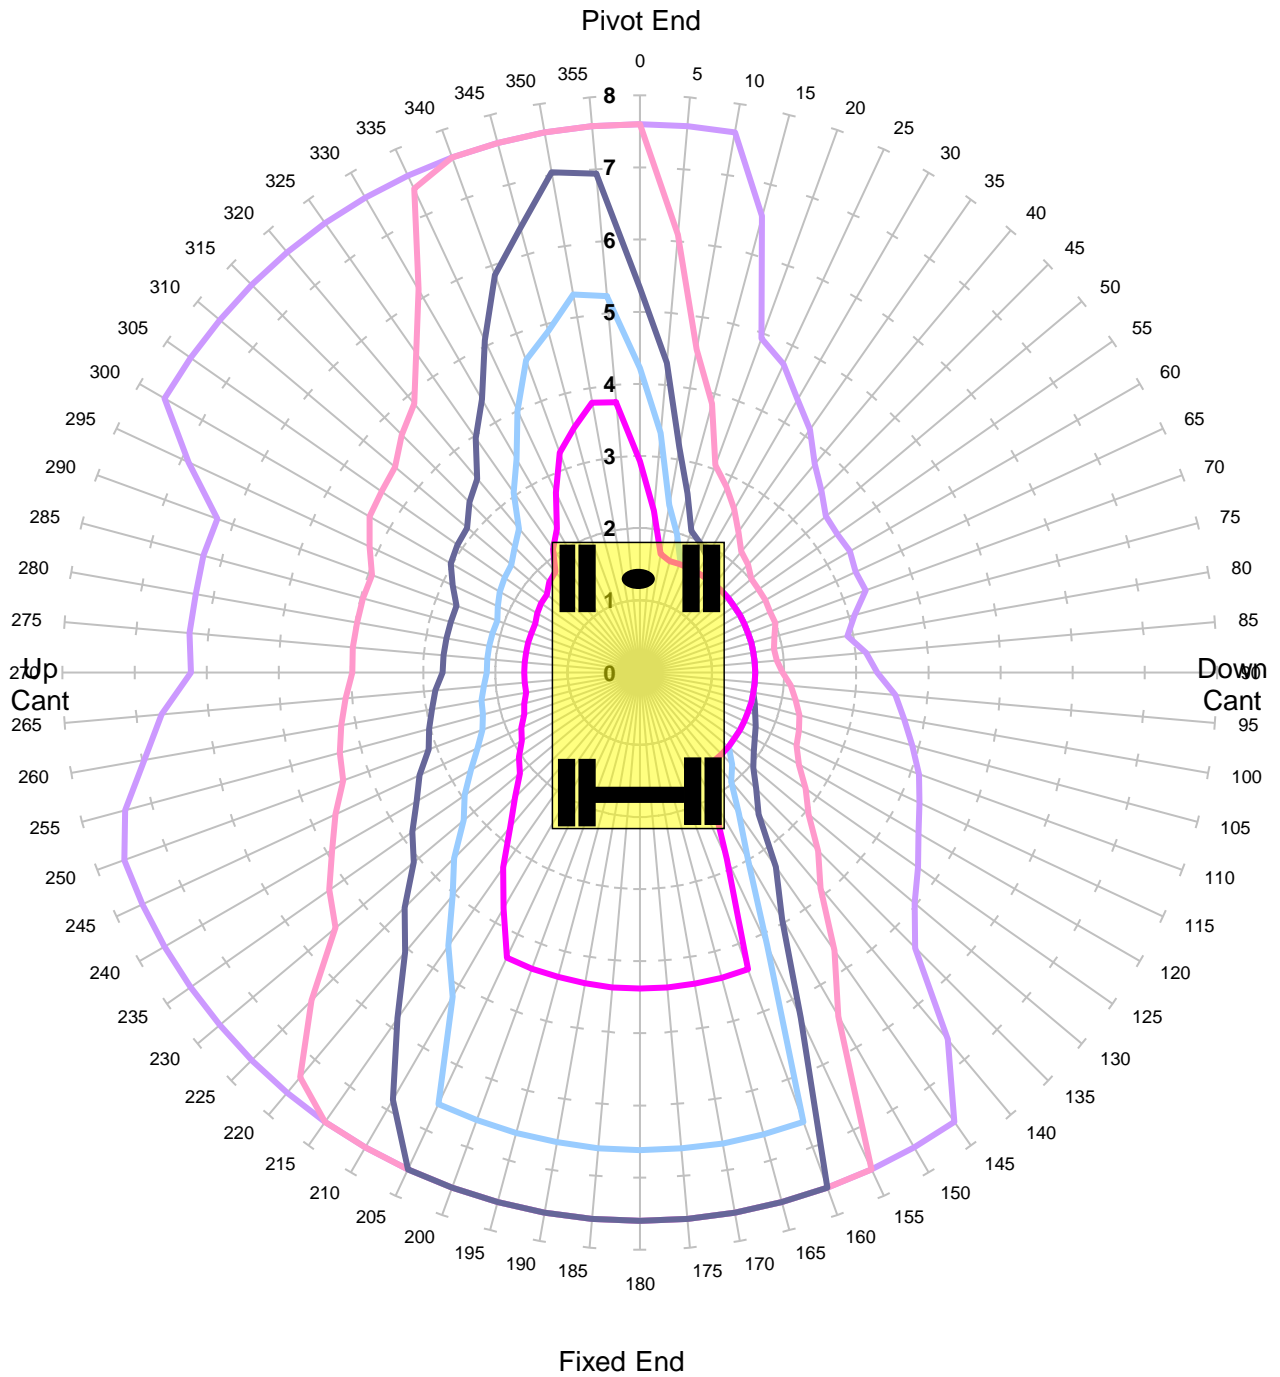


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	67.0%
COMMENT:			

Komatsu PW160
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift QH
Unlocked Rail Cant -50mm

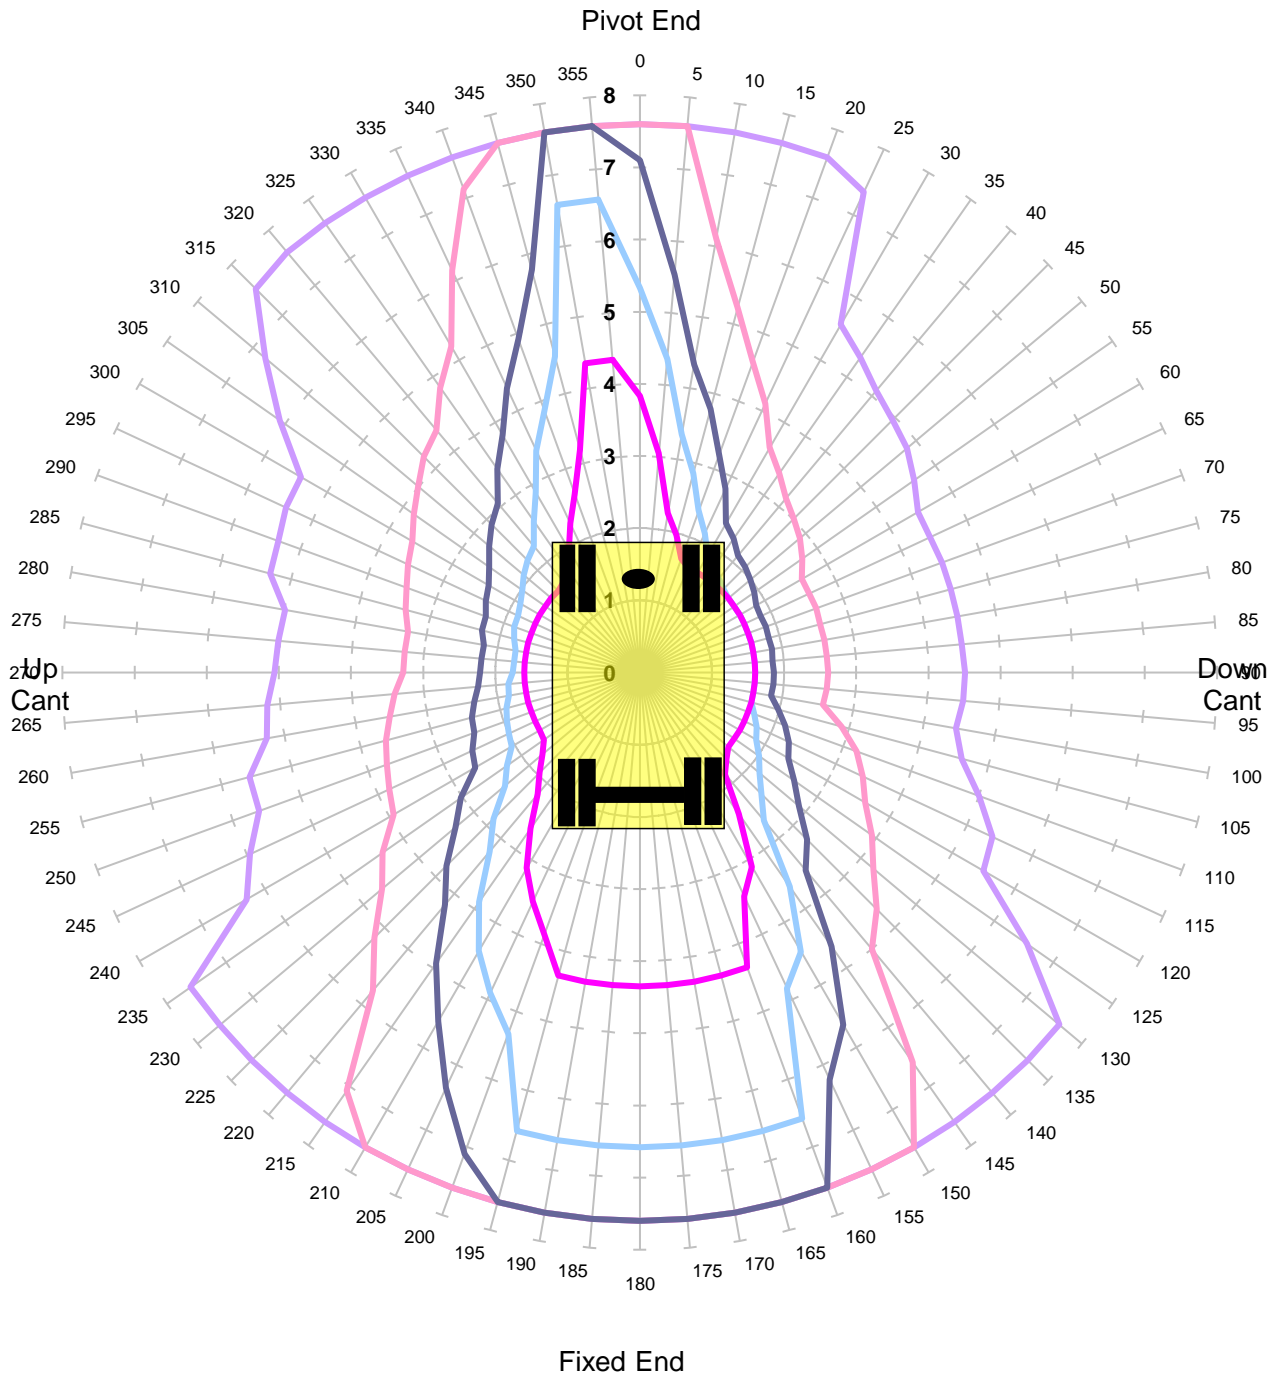


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	67.0%
COMMENT:			

Komatsu PW160
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift QH
Unlocked Rail Cant 50mm

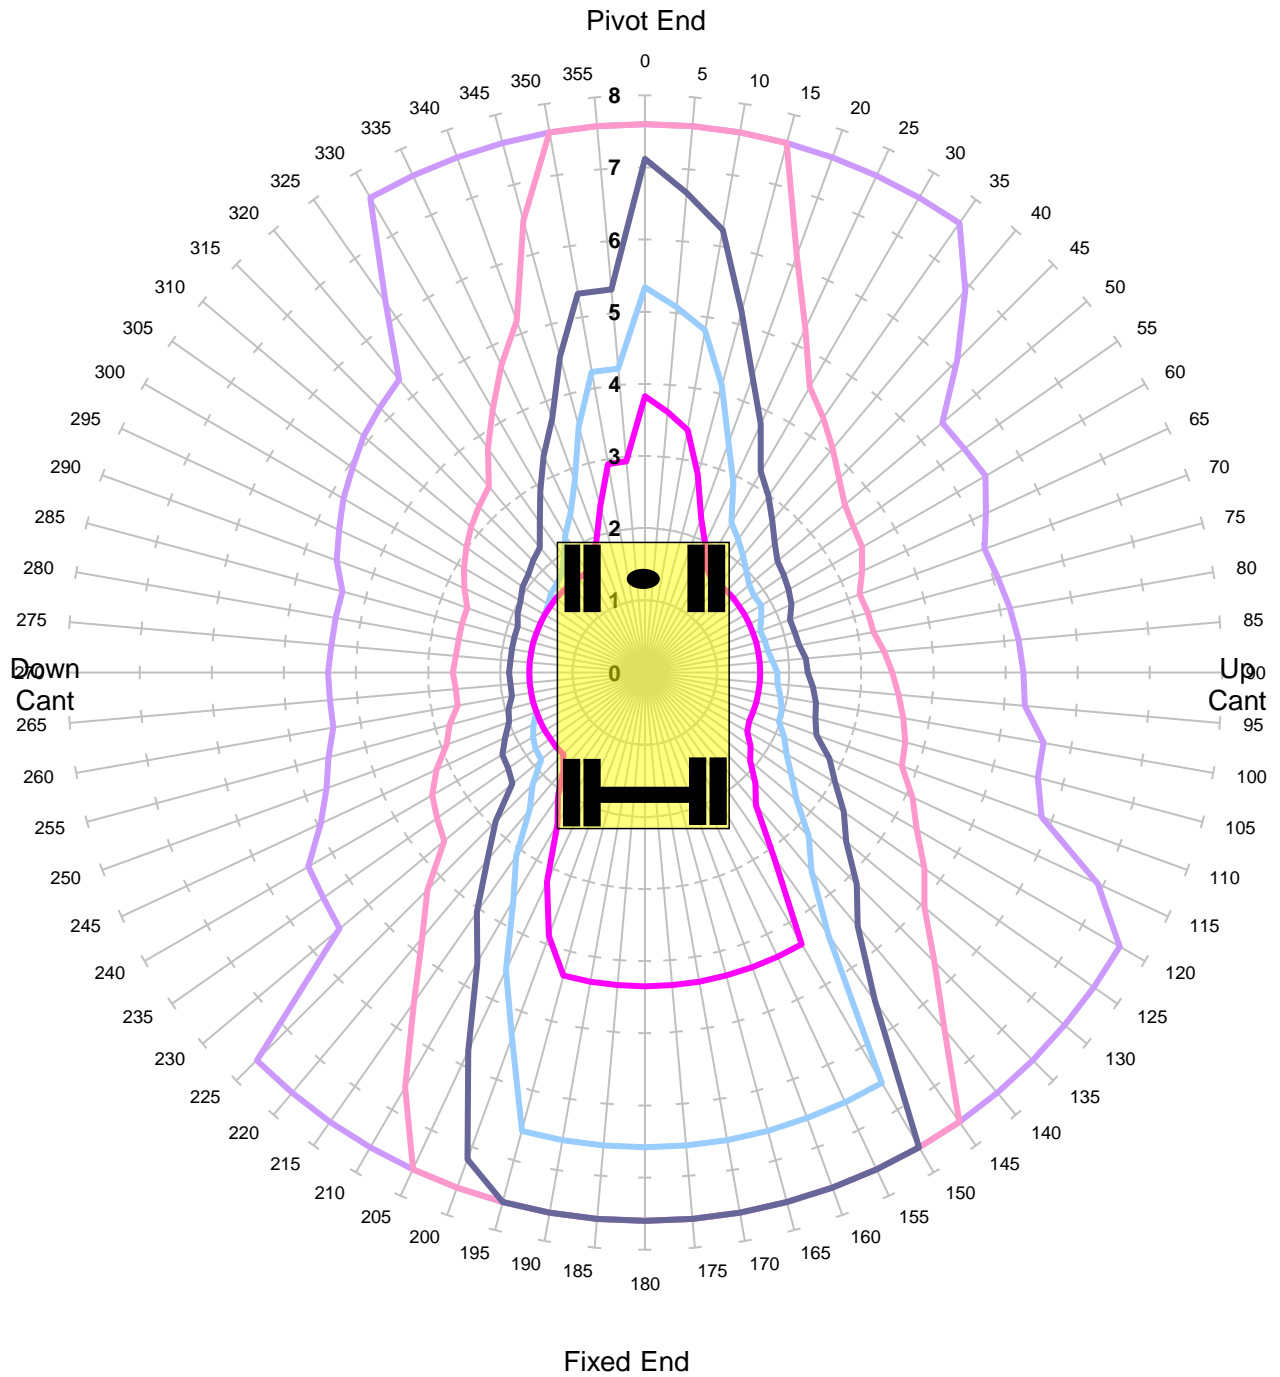


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	67.0%
COMMENT:			

Komatsu PW160
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift QH
Unlocked Rail Cant 150mm

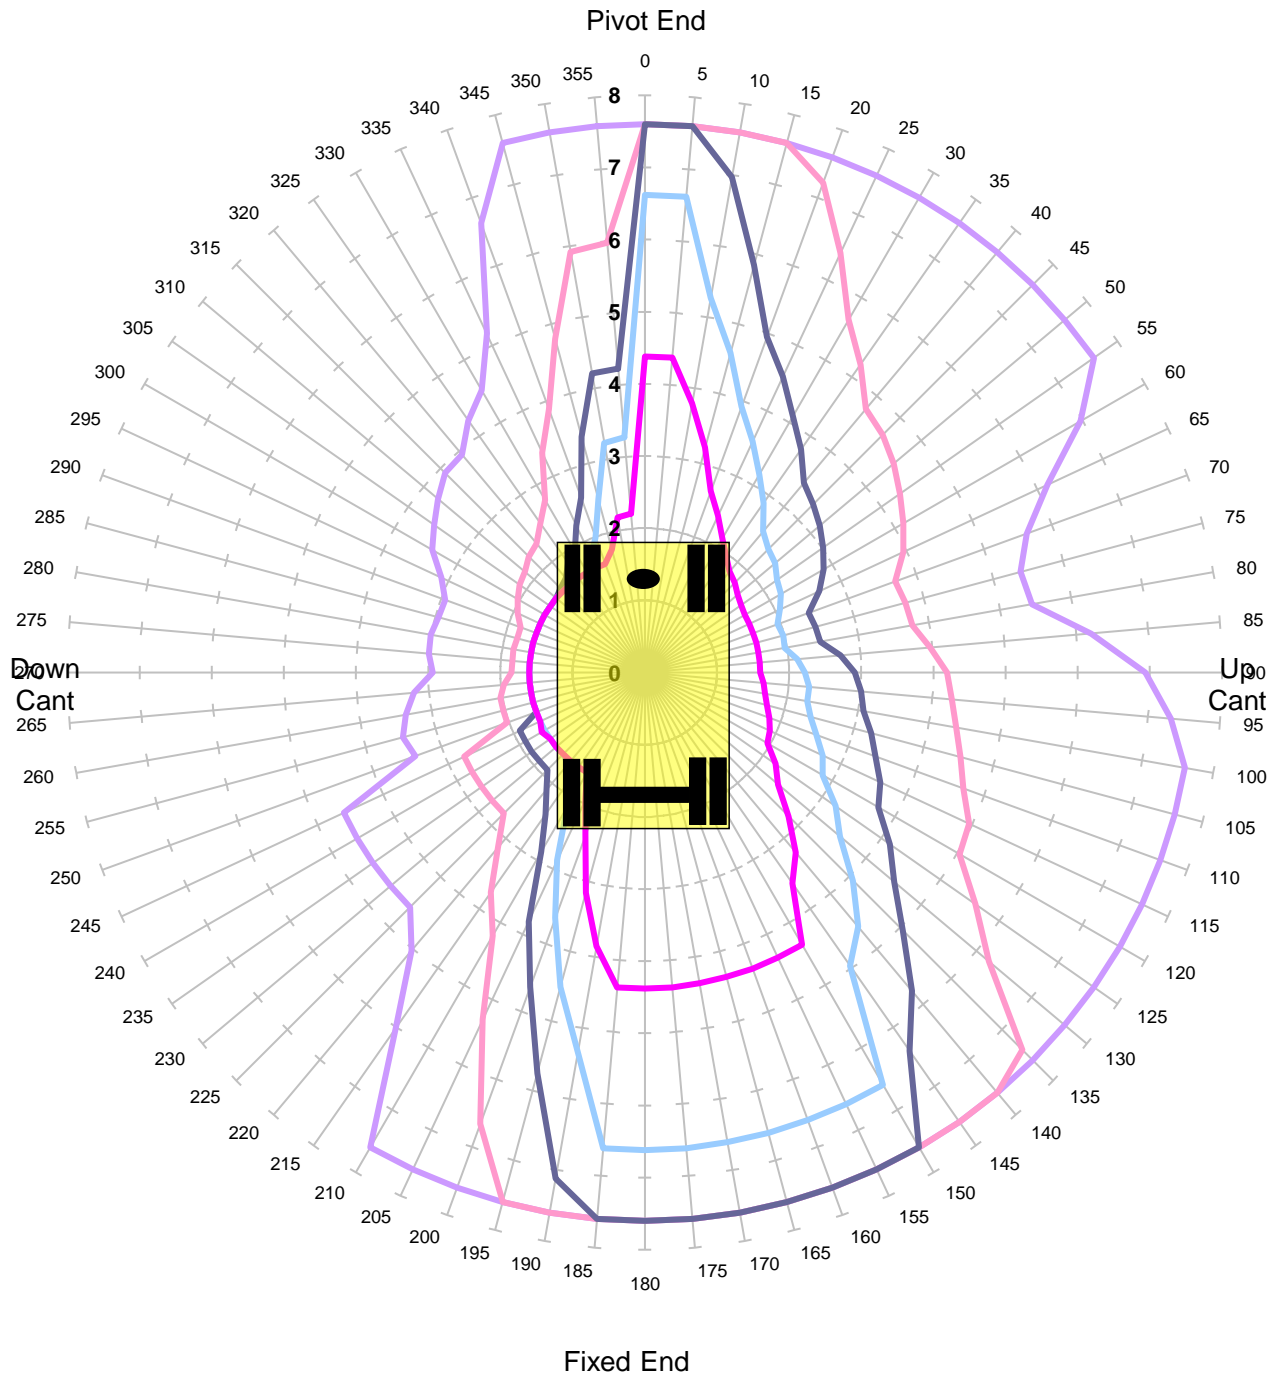


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	67.0%
COMMENT:			

Komatsu PW160
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift QH
Locked Rail Cant -150mm

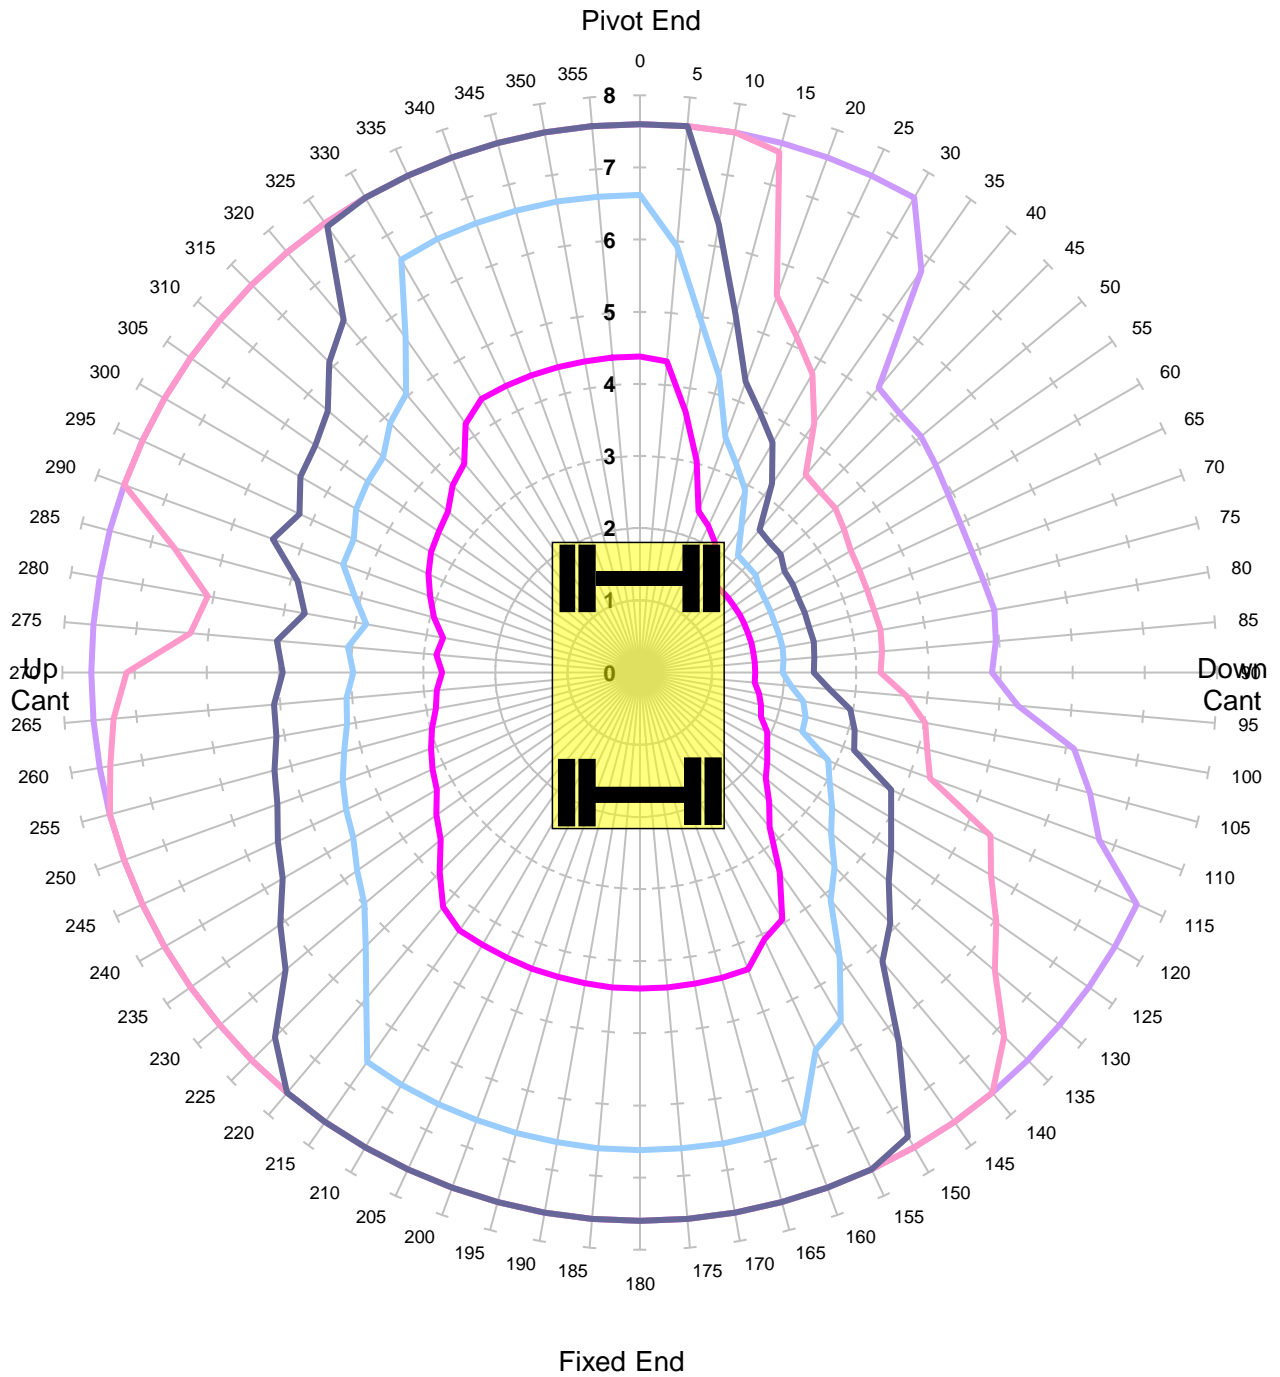


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	90.0%
COMMENT:			

Komatsu PW160
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift QH
Locked Rail Cant -50mm

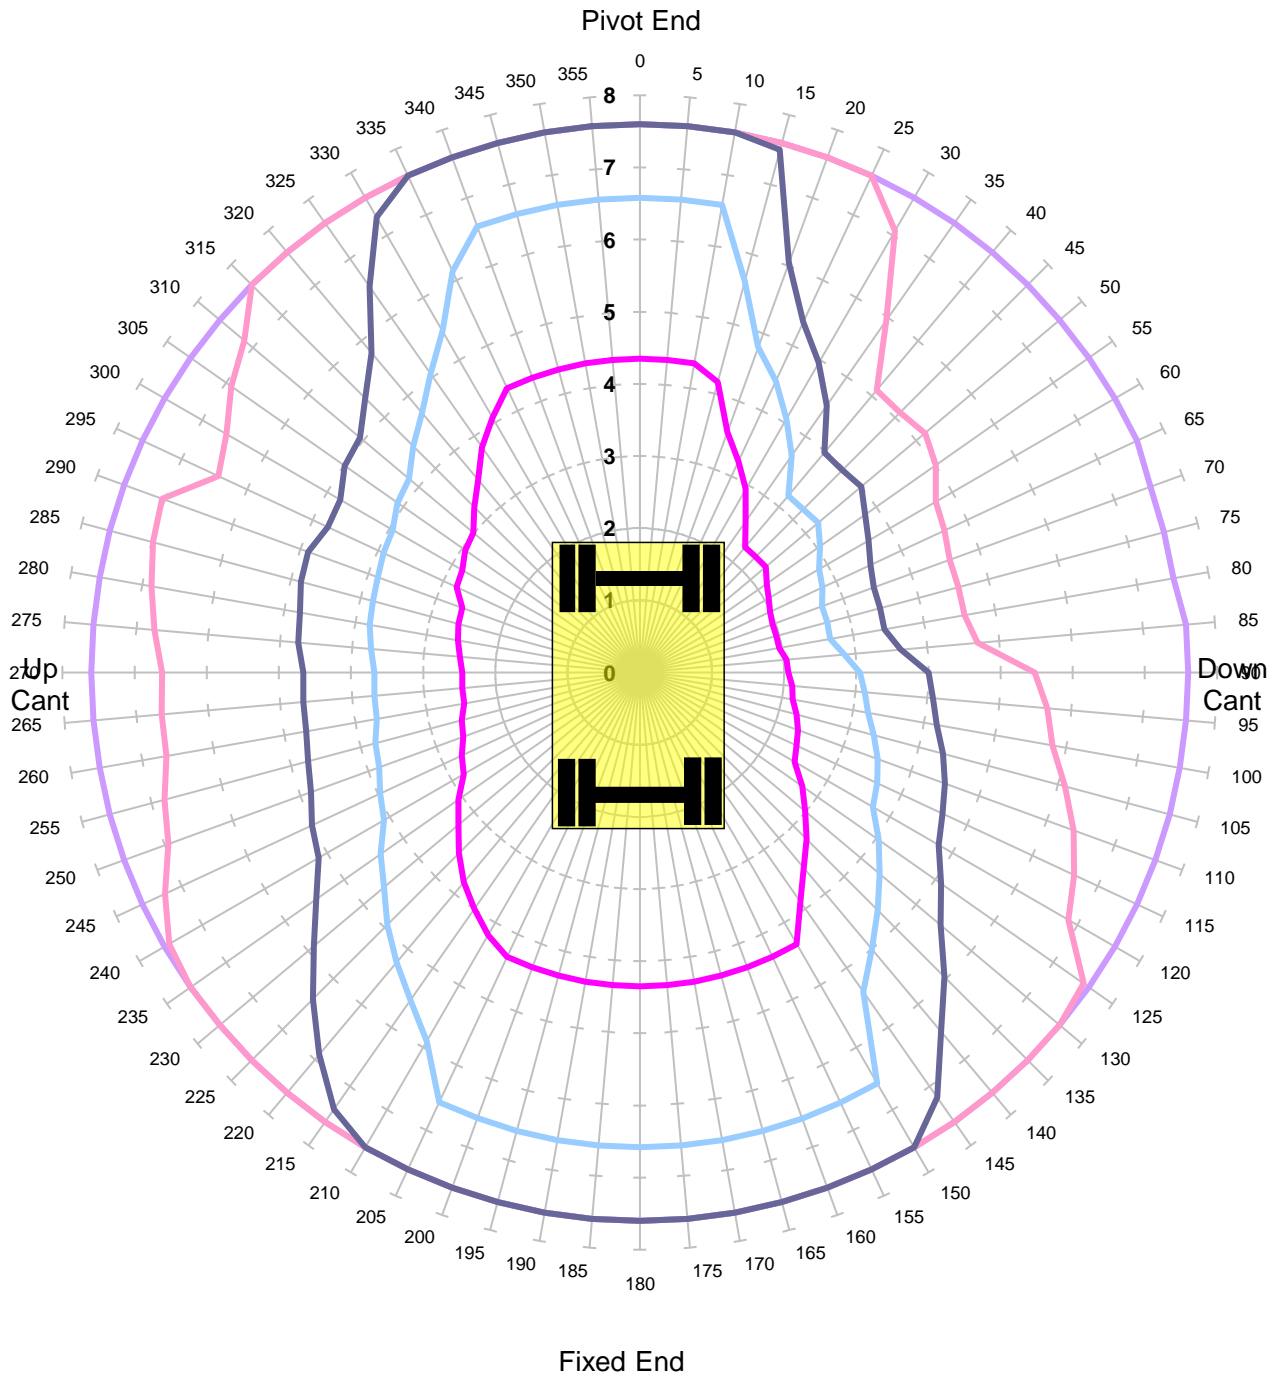


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	90.0%
COMMENT:			

Komatsu PW160
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift QH
Locked Rail Cant 50mm

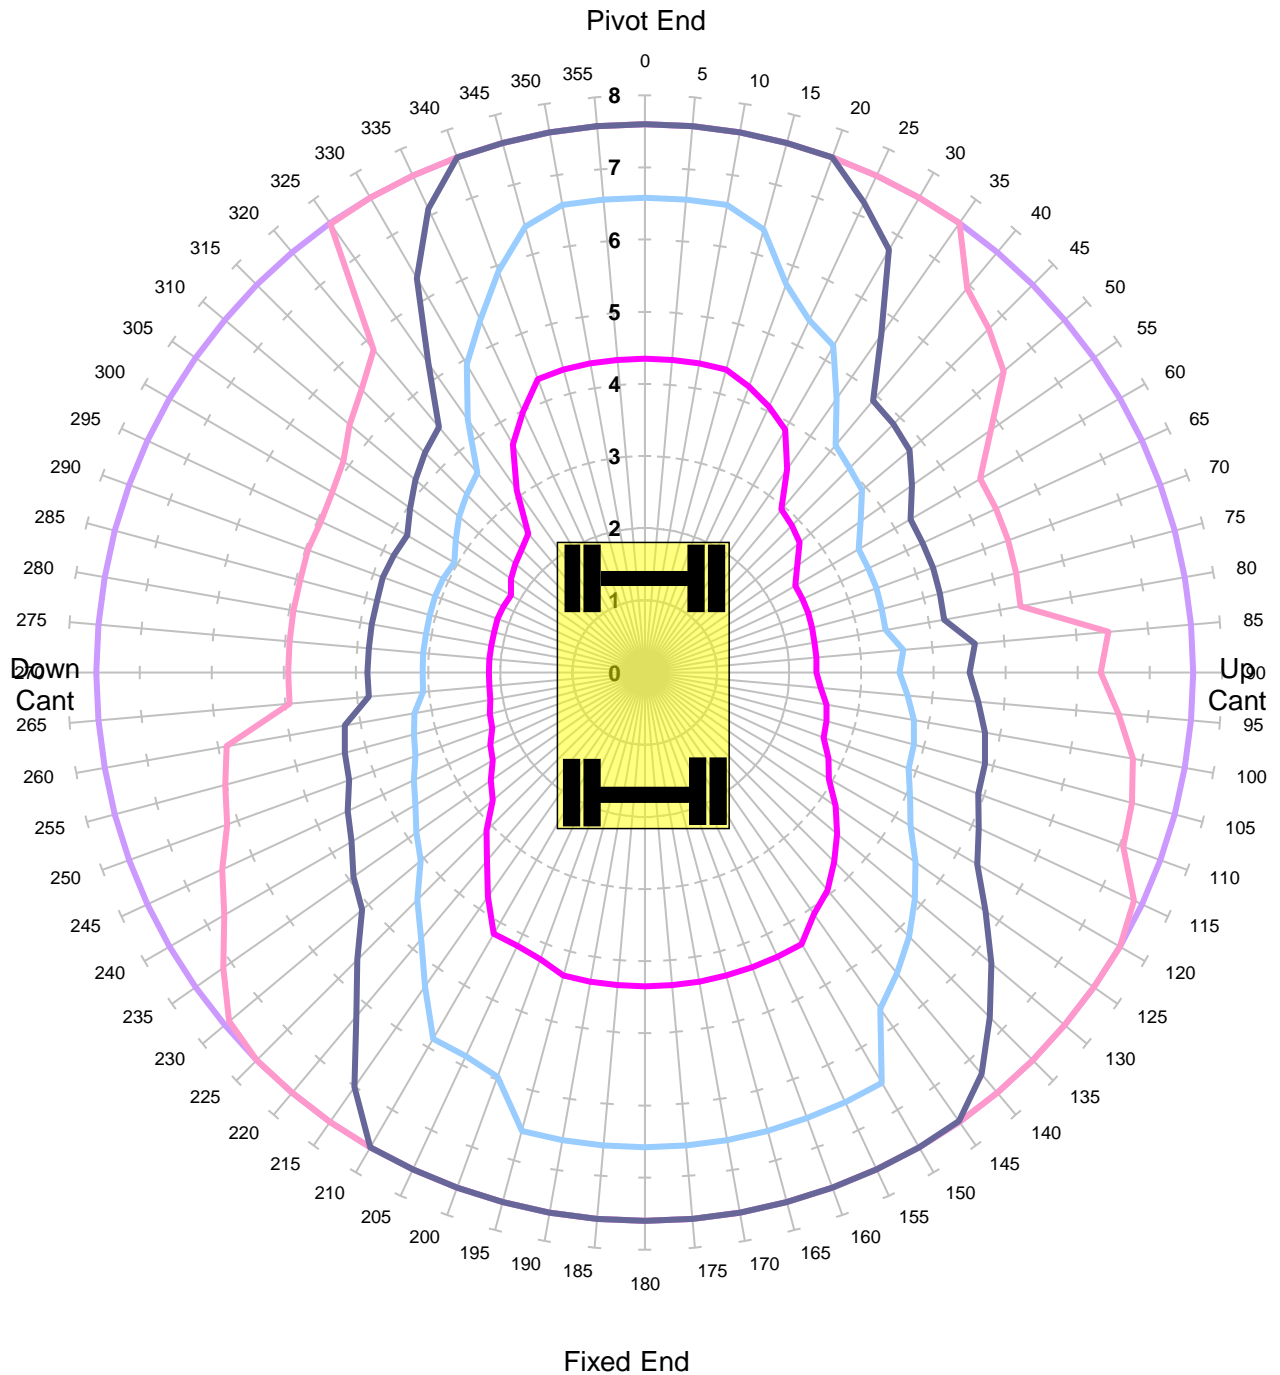


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	90.0%
COMMENT:			

Komatsu PW160
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift QH
Locked Rail Cant 150mm

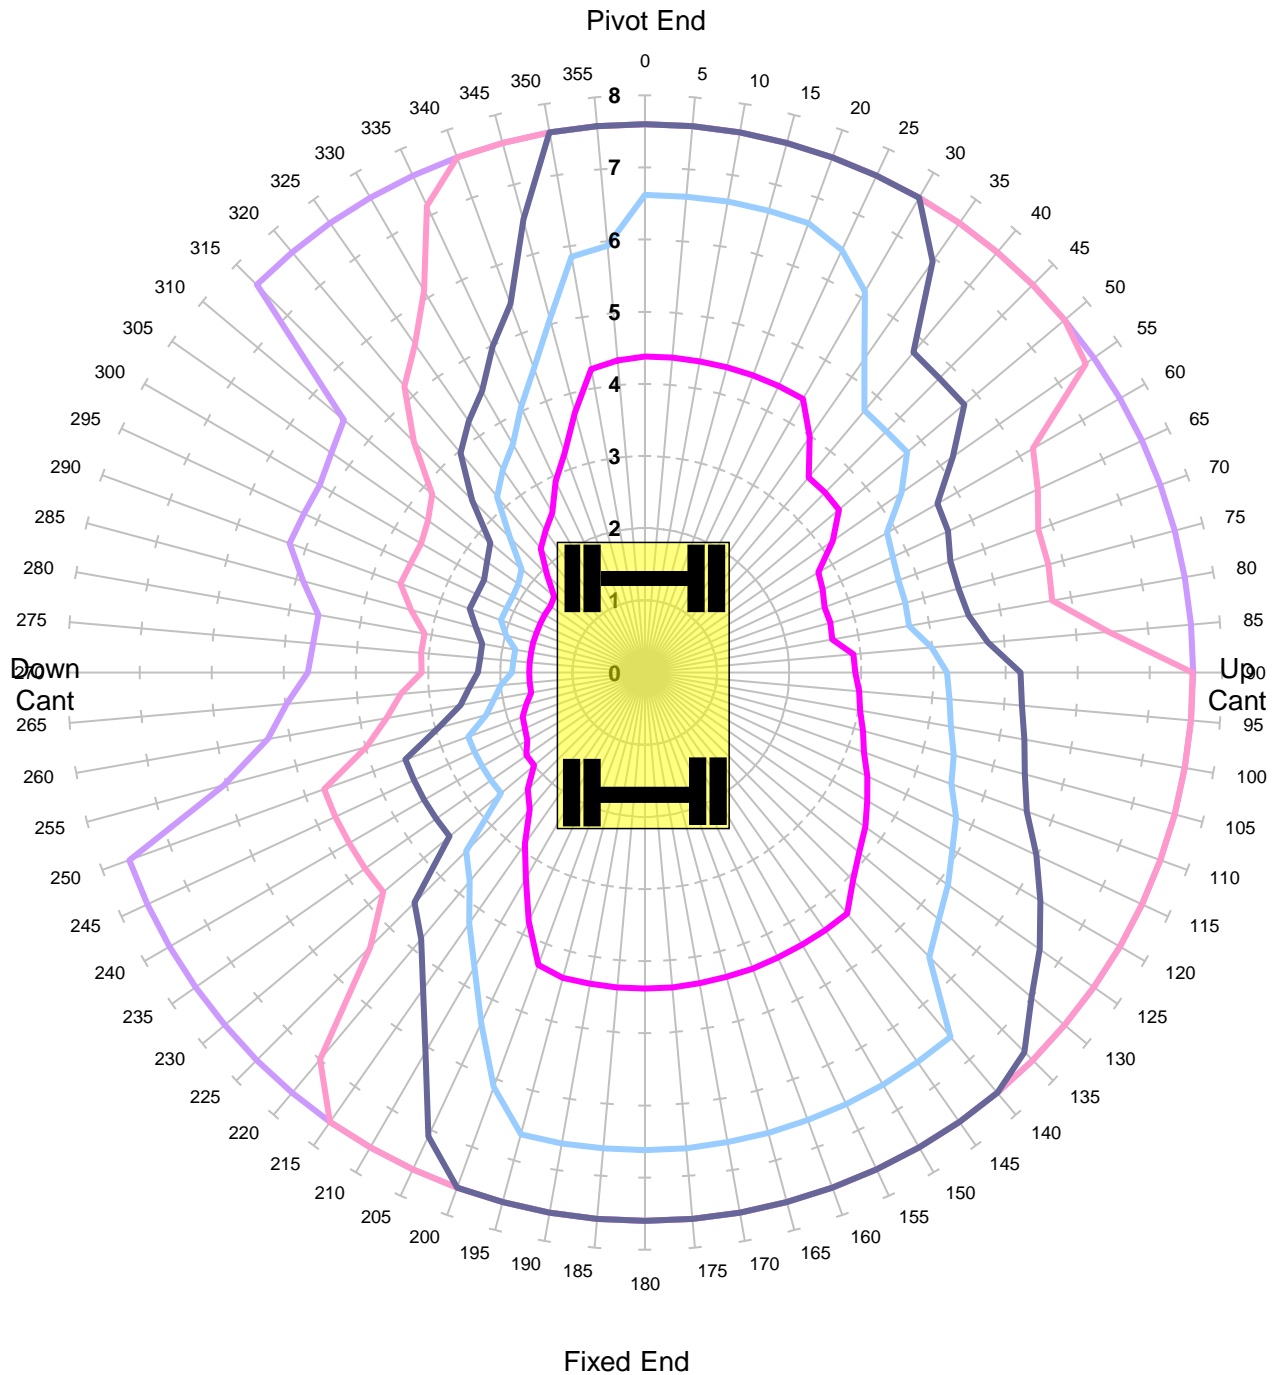


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	90.0%
COMMENT:			

Komatsu PW160
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Level Ground Height 2m Lift QH
Unlocked Road

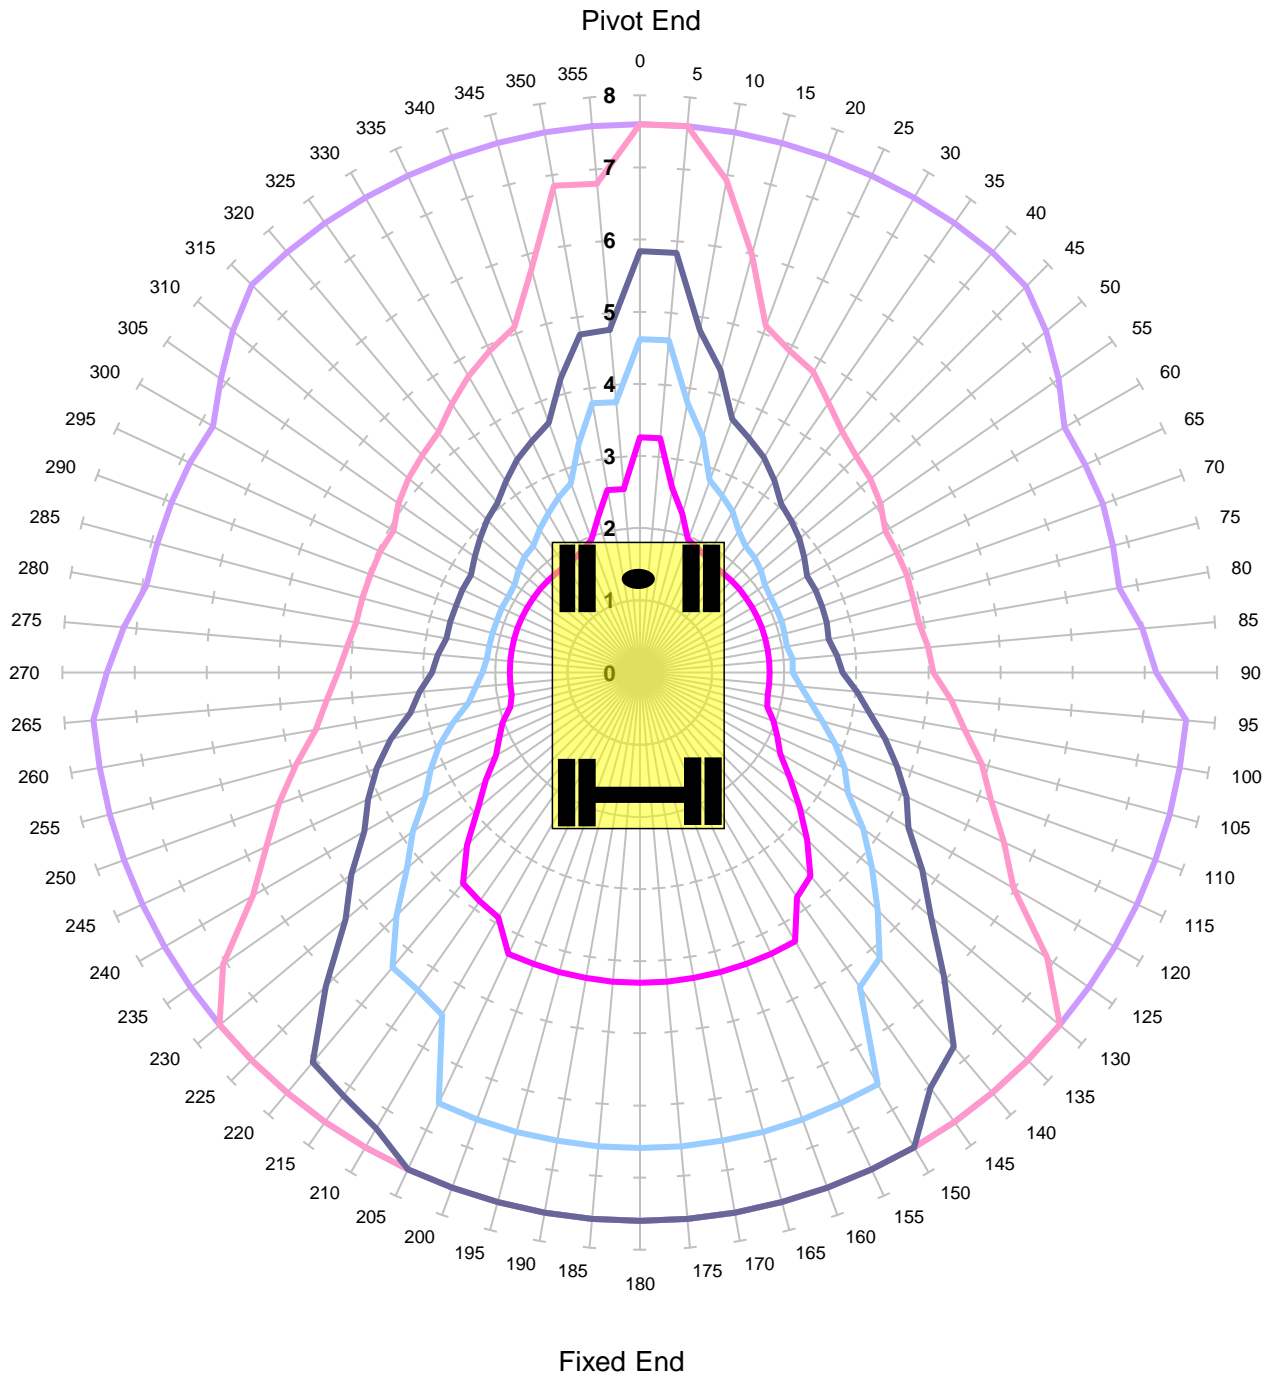


Units in Tonnes

— 1 — 2 — 3 — 4 — 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	71.0%
COMMENT:			

Komatsu PW160
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Level Ground Height 2m Lift QH
Locked Road

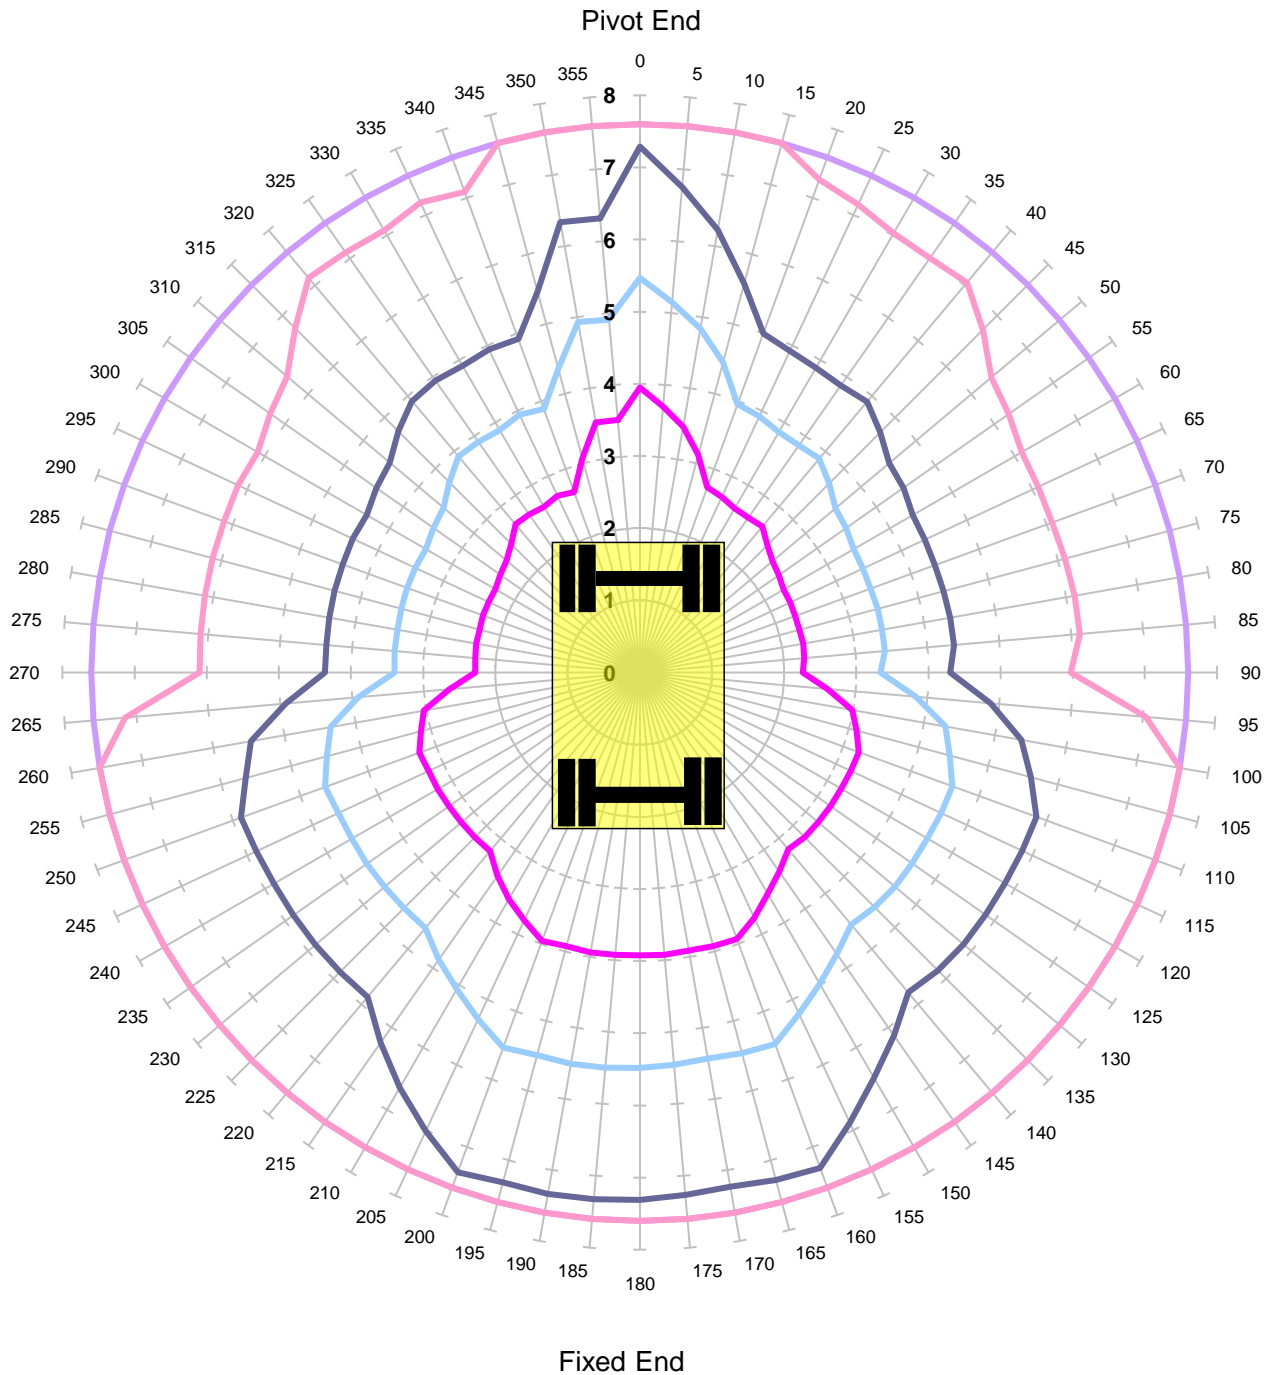

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	71.0%
COMMENT:			

Komatsu PW160

**Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift QH**

Unlocked Rail Cant -150mm - Tandem Lift

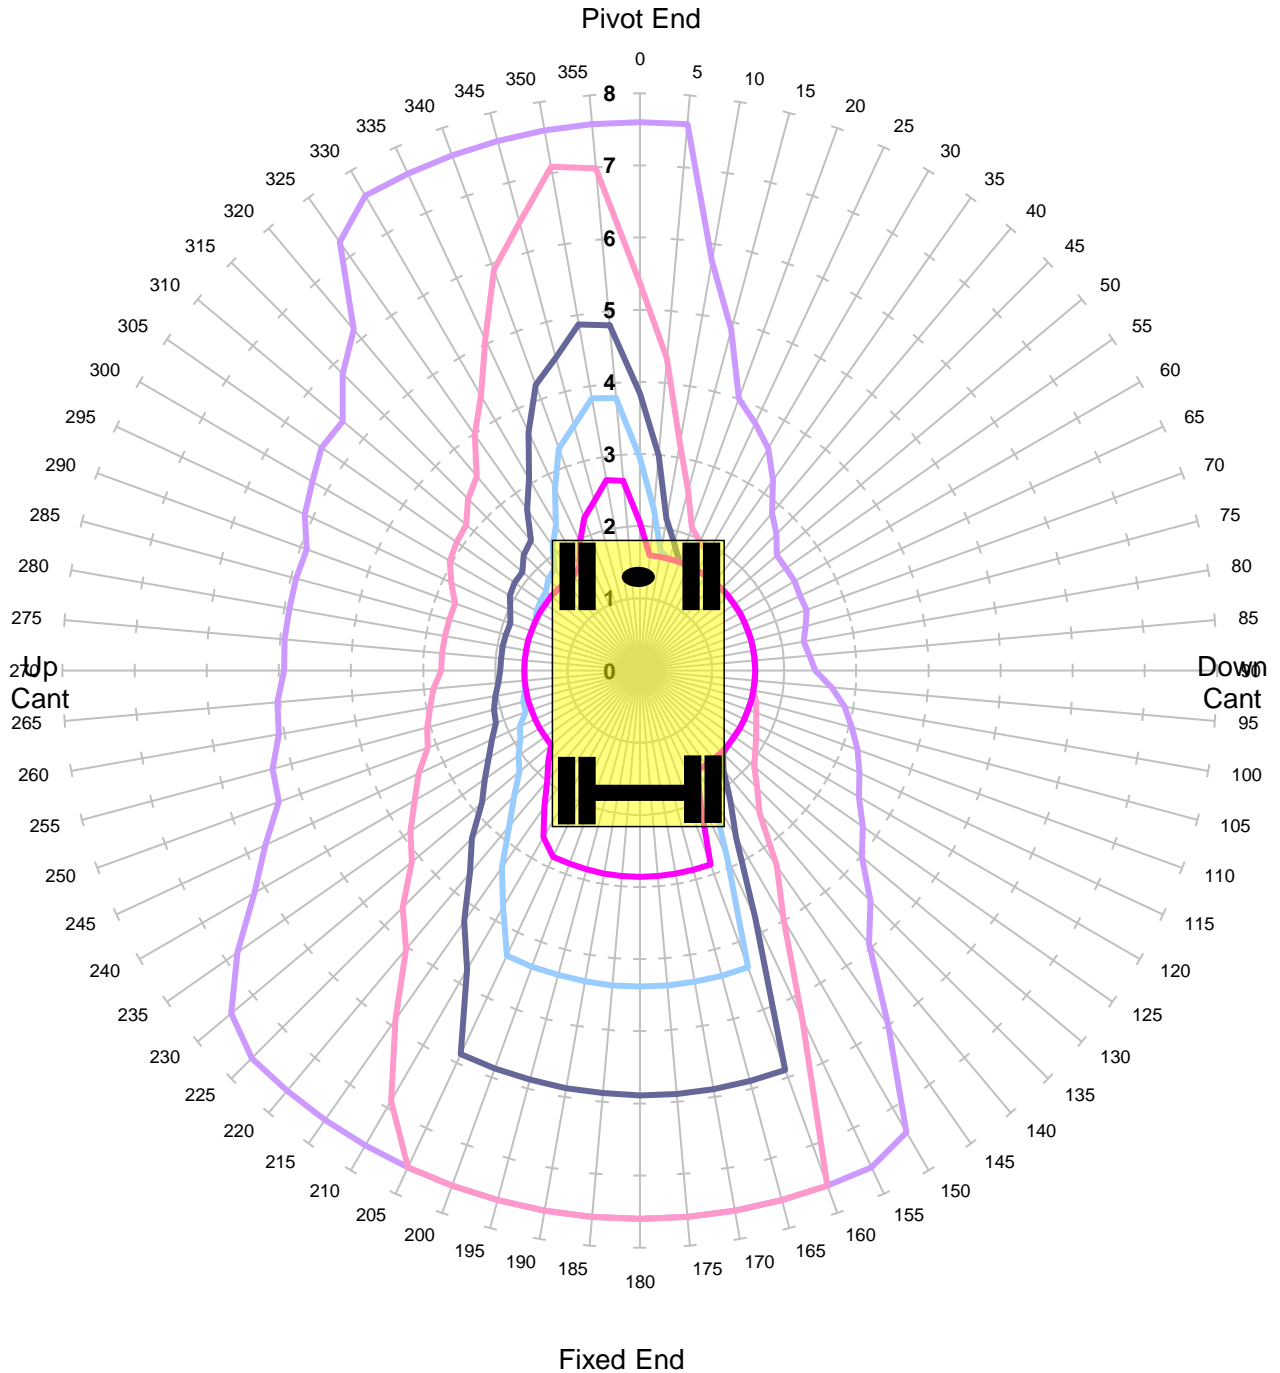


Units in Tonnes

- 1
- 2
- 3
- 4
- 6


MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	45.0%
COMMENT:			

Komatsu PW160
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift QH
Unlocked Rail Cant -50mm - Tandem Lift

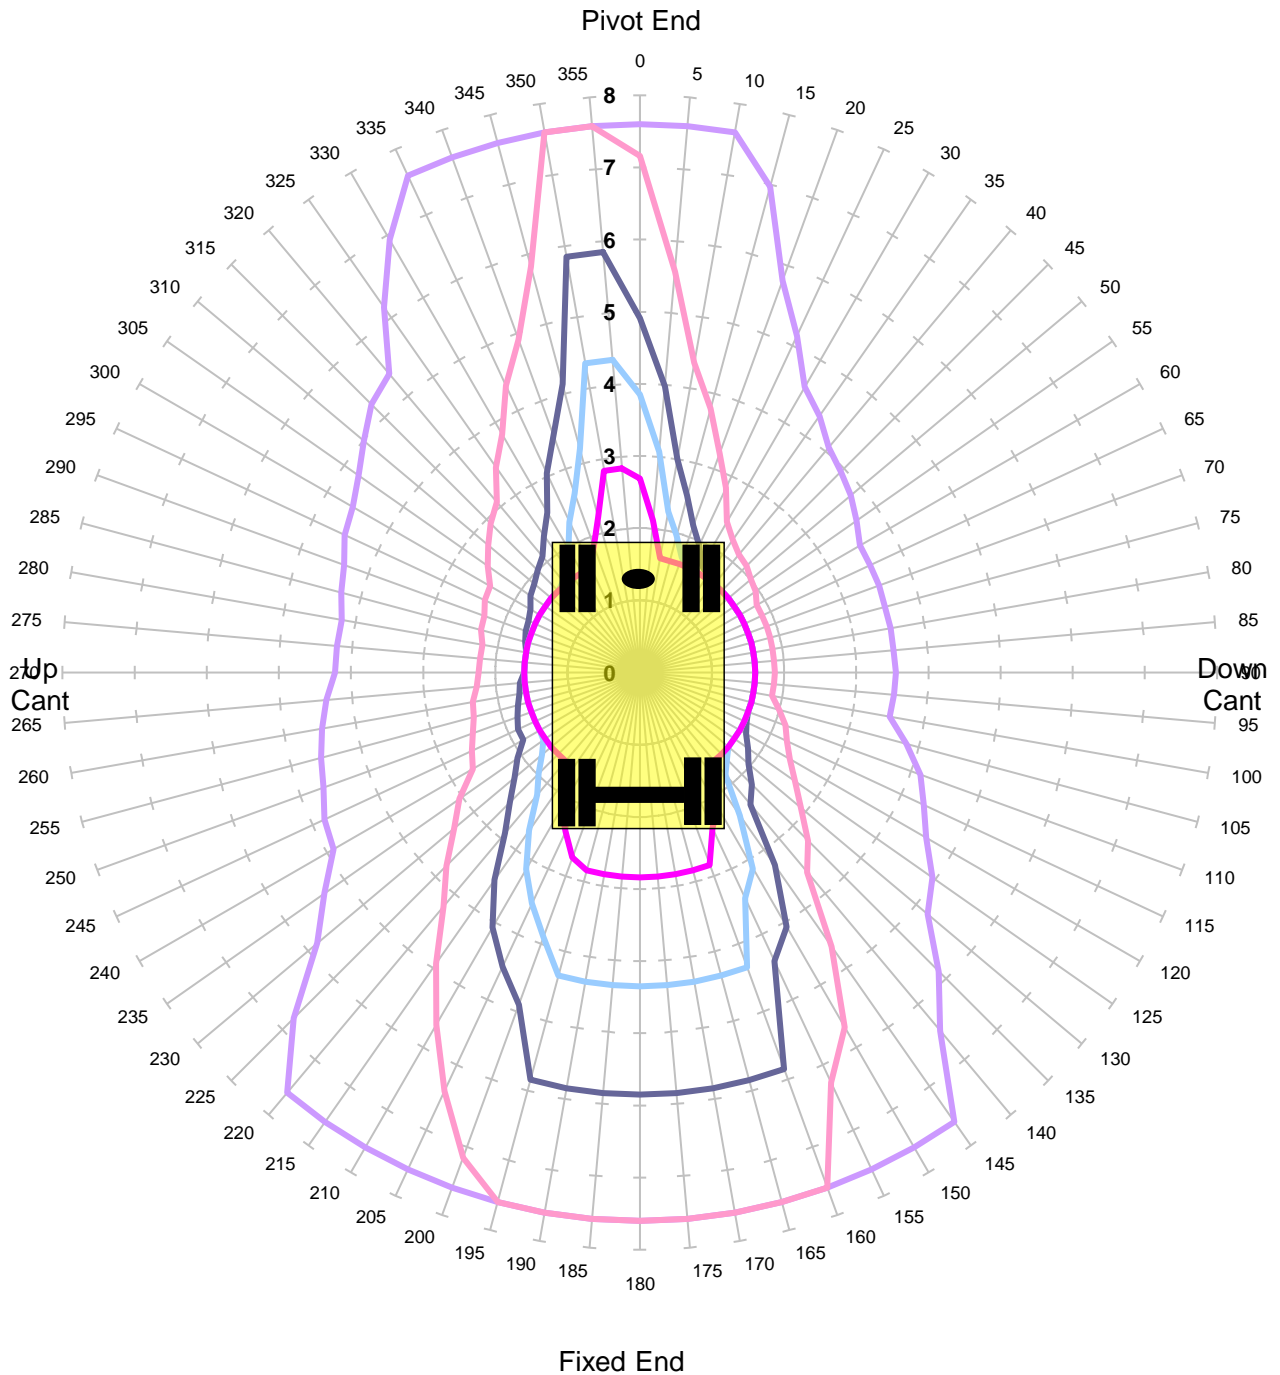

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	45.0%
COMMENT:			

Komatsu PW160
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift QH
Unlocked Rail Cant 50mm - Tandem Lift

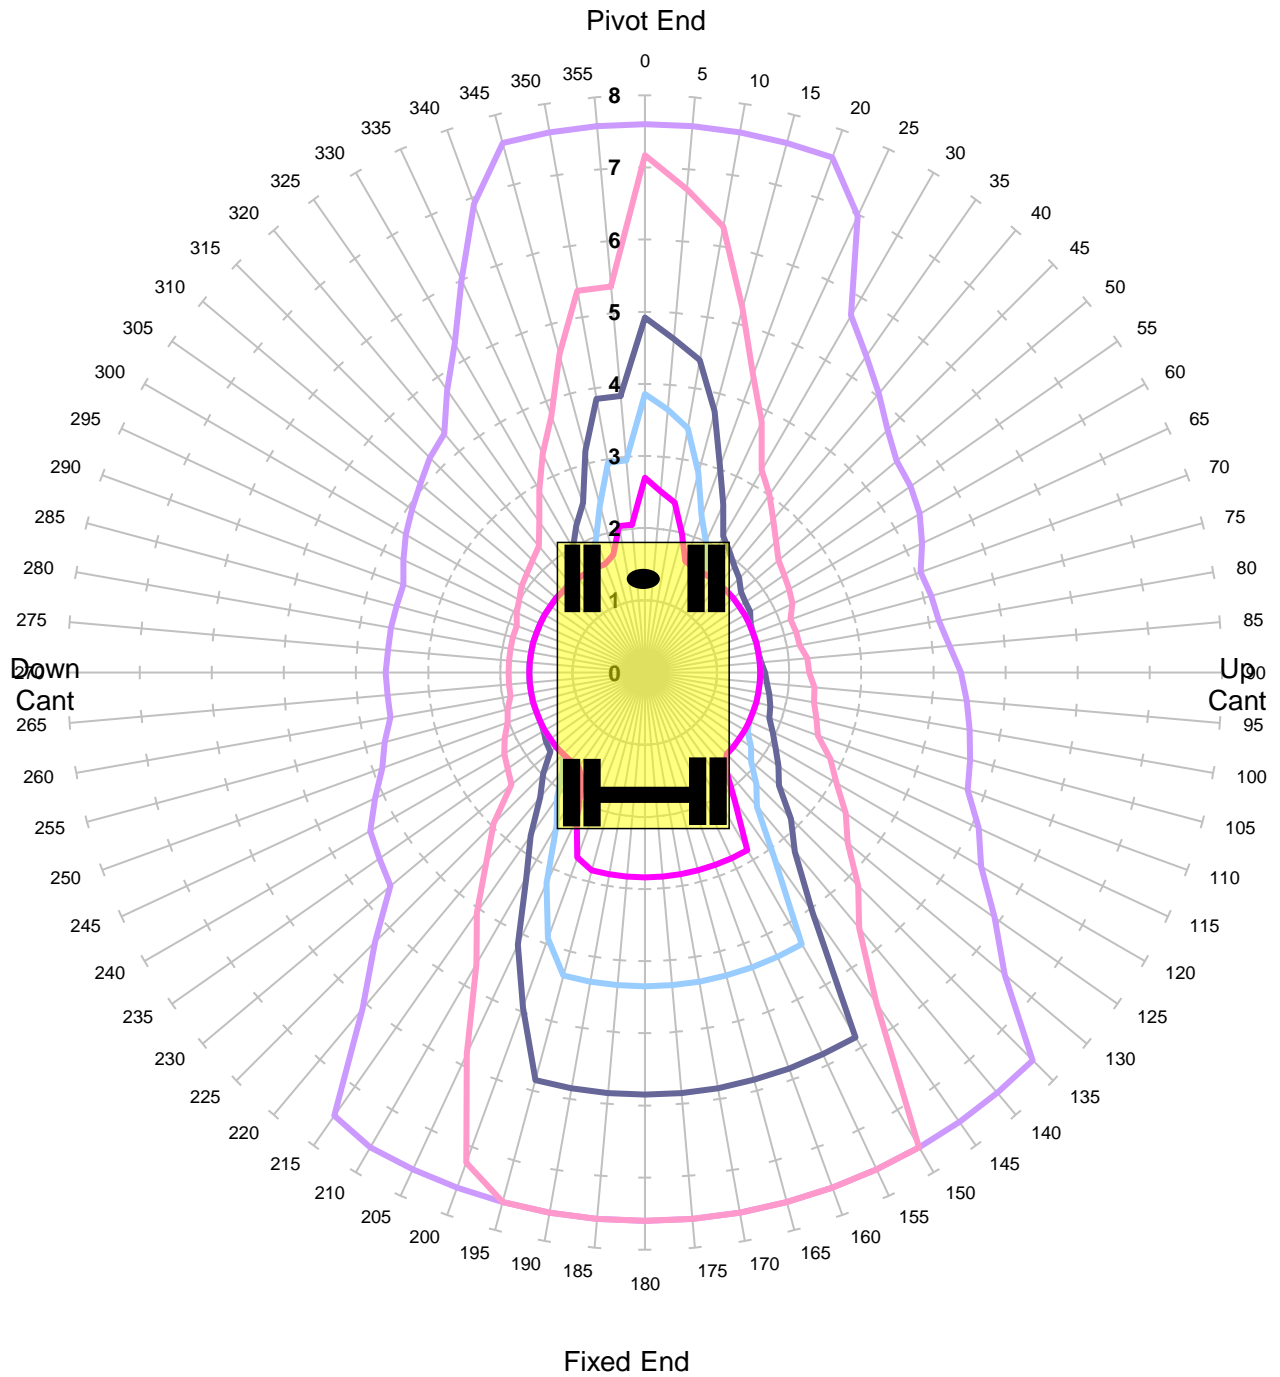


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	45.0%
COMMENT:			

Komatsu PW160
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift QH
Unlocked Rail Cant 150mm - Tandem Lift

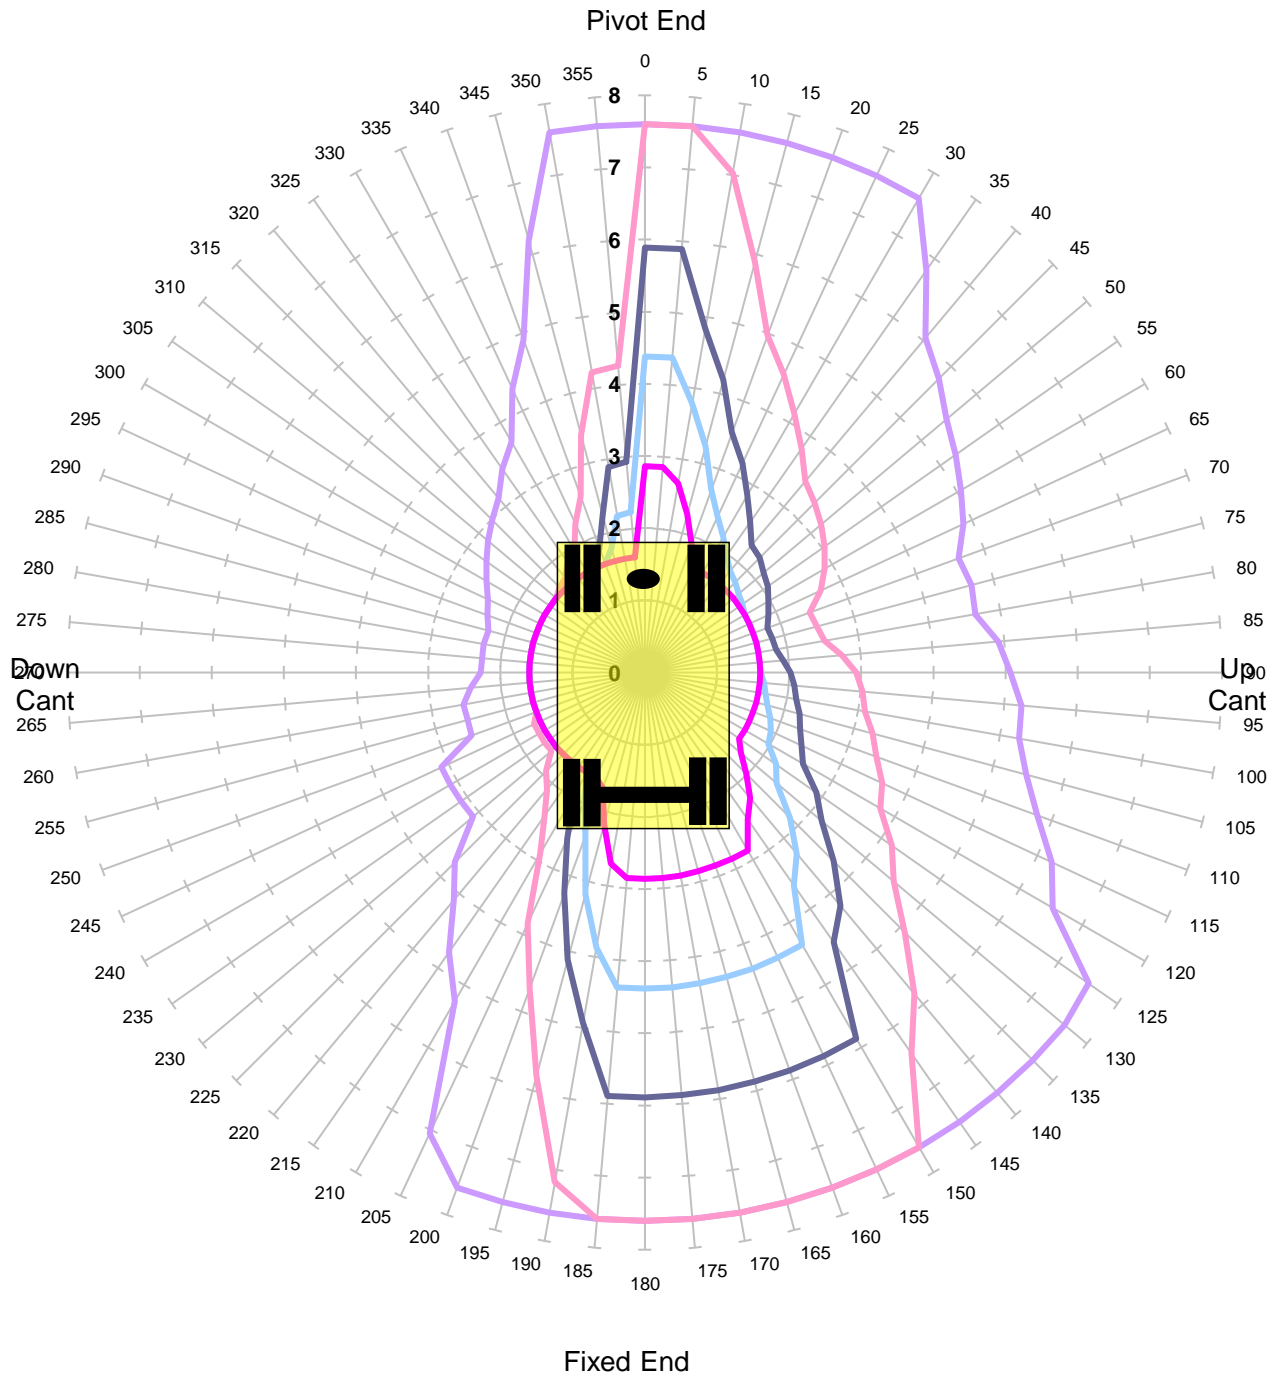


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	45.0%
COMMENT:			

Komatsu PW160
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift QH
Locked Rail Cant -150mm - Tandem Lift

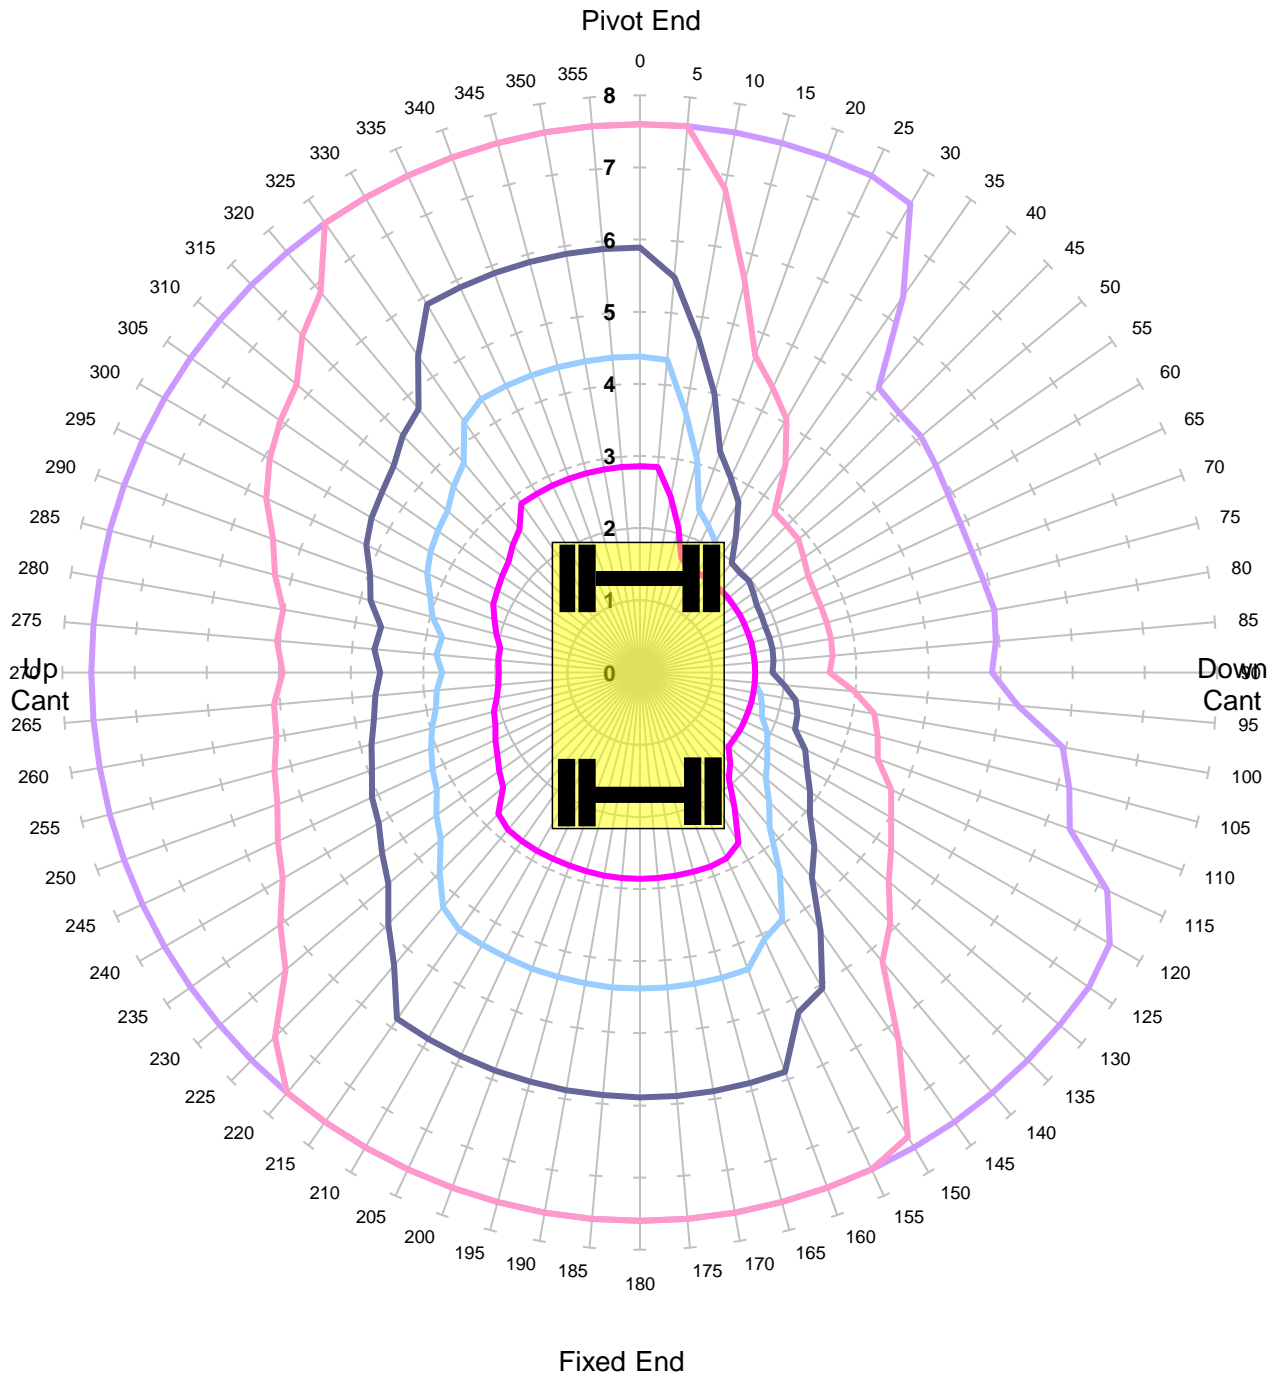

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	60.0%
COMMENT:			

Komatsu PW160

**Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift QH**

Locked Rail Cant -50mm - Tandem Lift

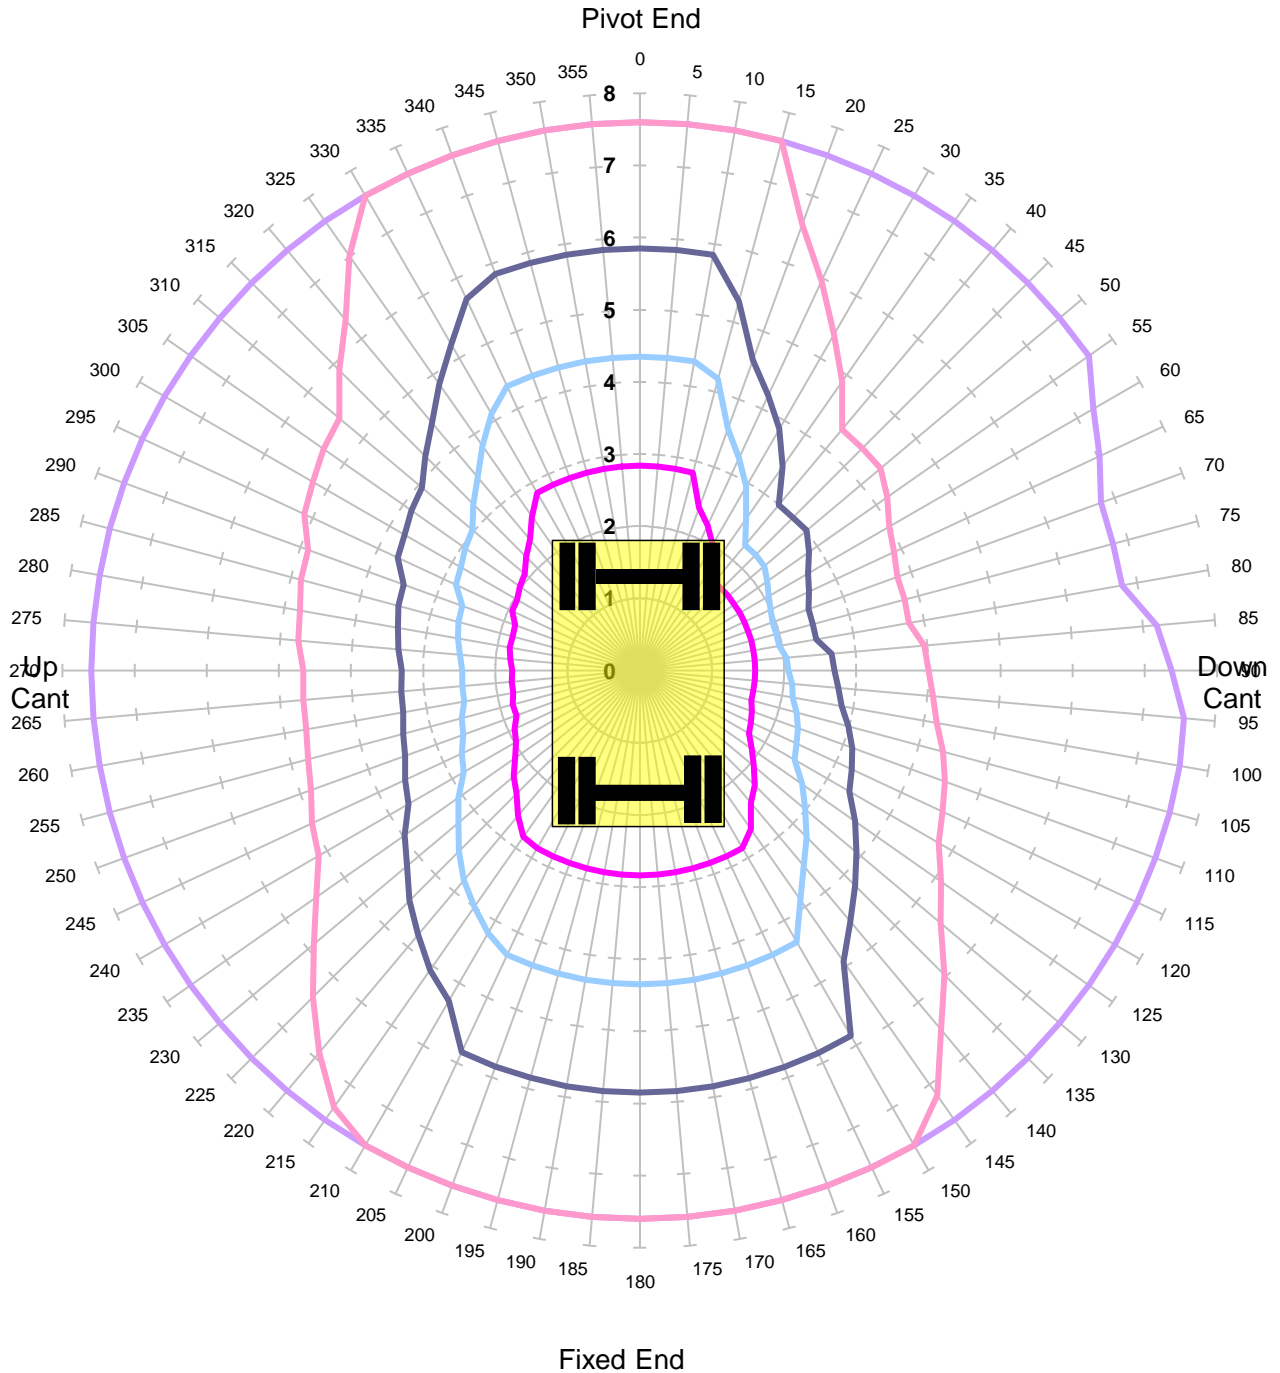

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	60.0%
COMMENT:			

Komatsu PW160

**Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift QH**

Locked Rail Cant 50mm - Tandem Lift

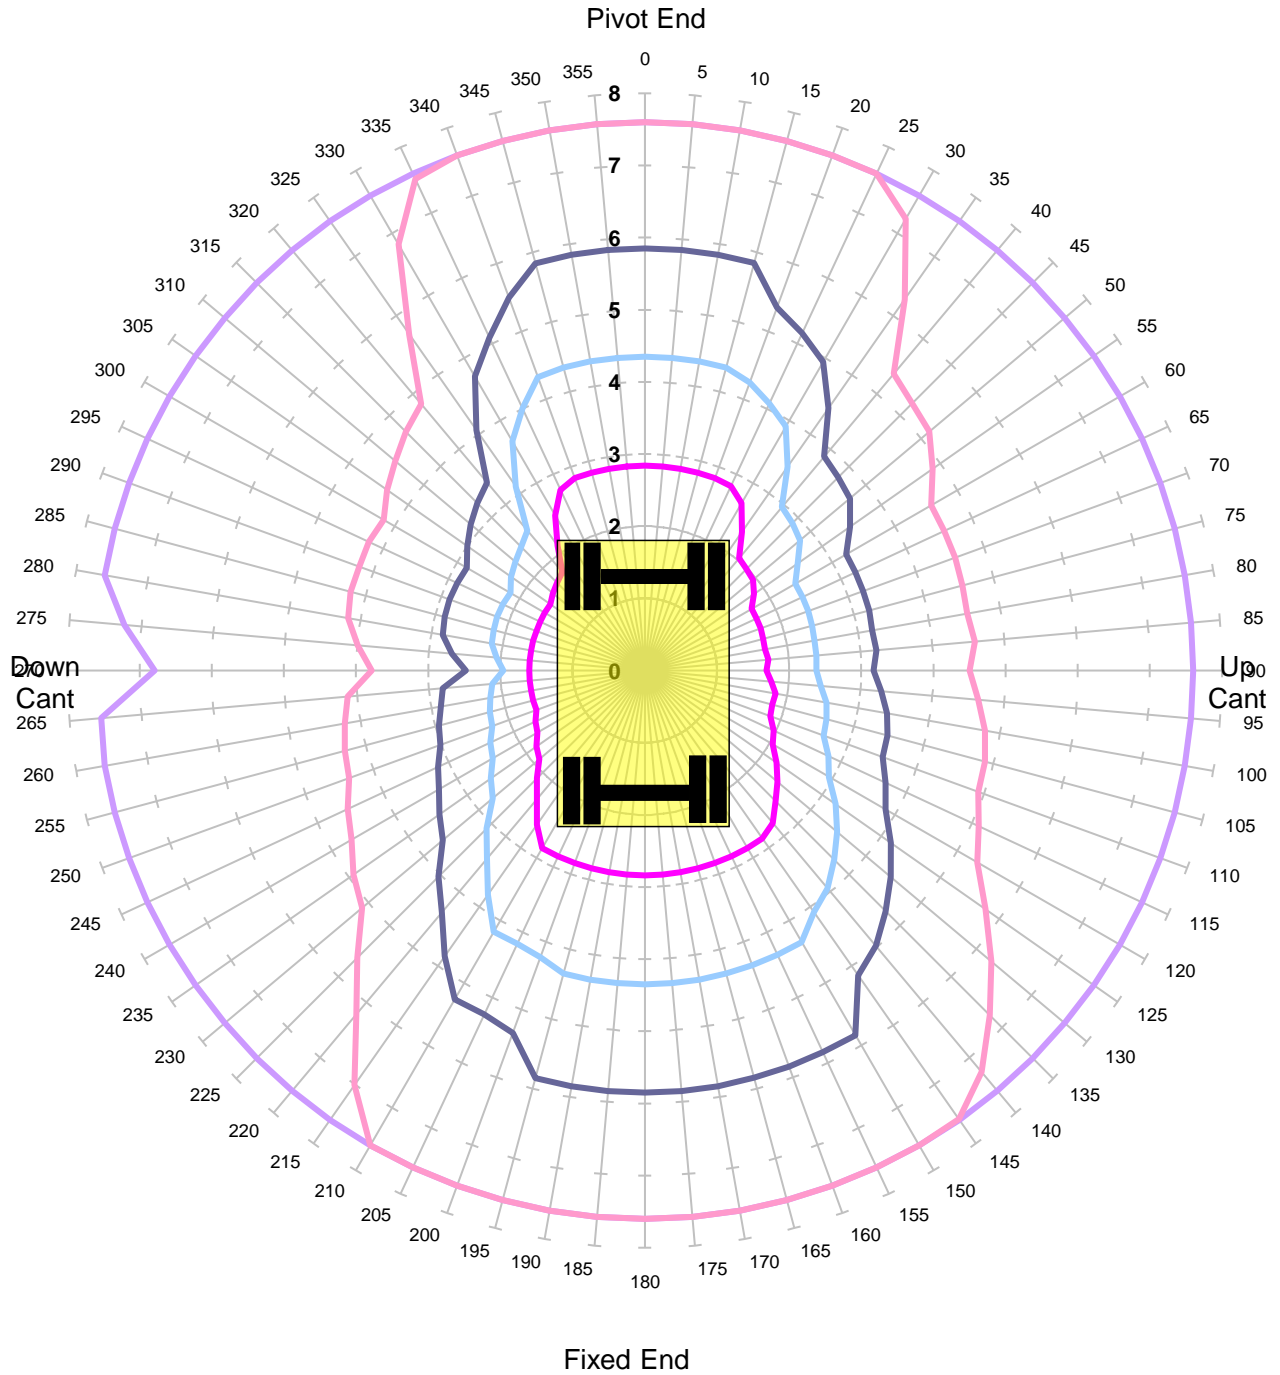

Units in Tonnes


— 1 — 2 — 3 — 4 — 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	60.0%
COMMENT:			

Komatsu PW160

**Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Gradient 1 in -25 Height 2m Lift QH**

Locked Rail Cant 150mm - Tandem Lift

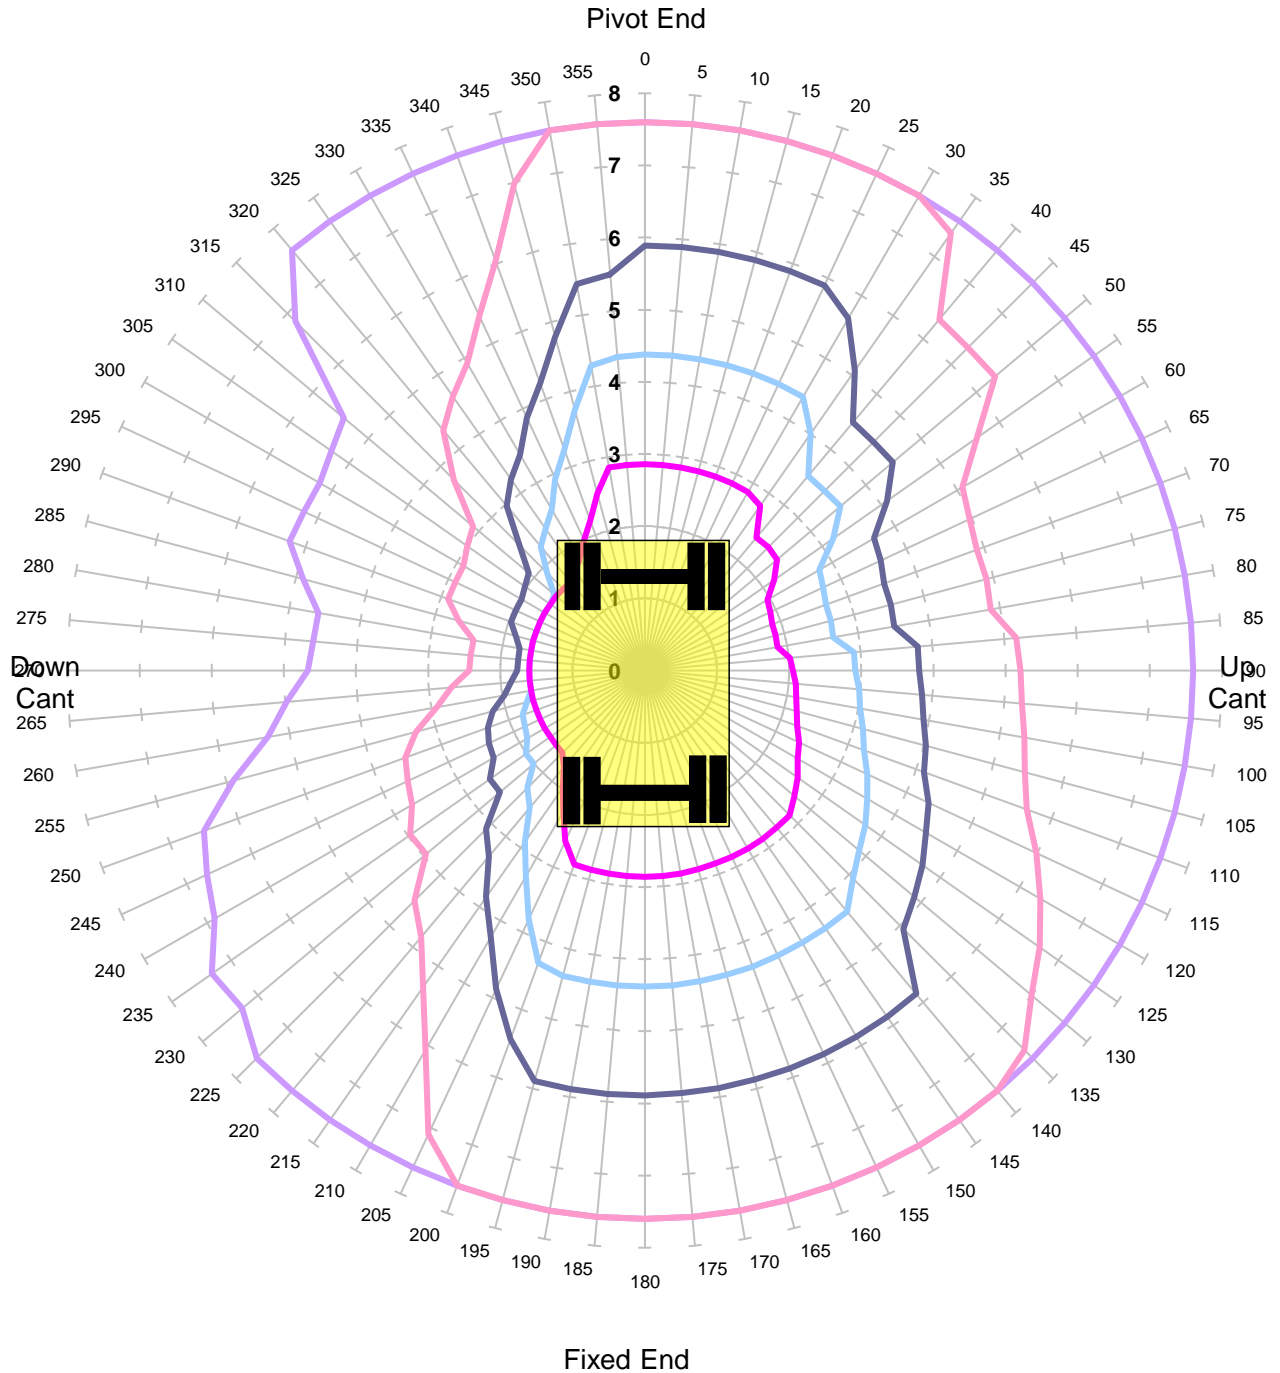


Units in Tonnes

— 1 — 2 — 3 — 4 — 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	60.0%
COMMENT:			

Komatsu PW160
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Level Ground Height 2m Lift QH
Unlocked Road - Tandem Lift

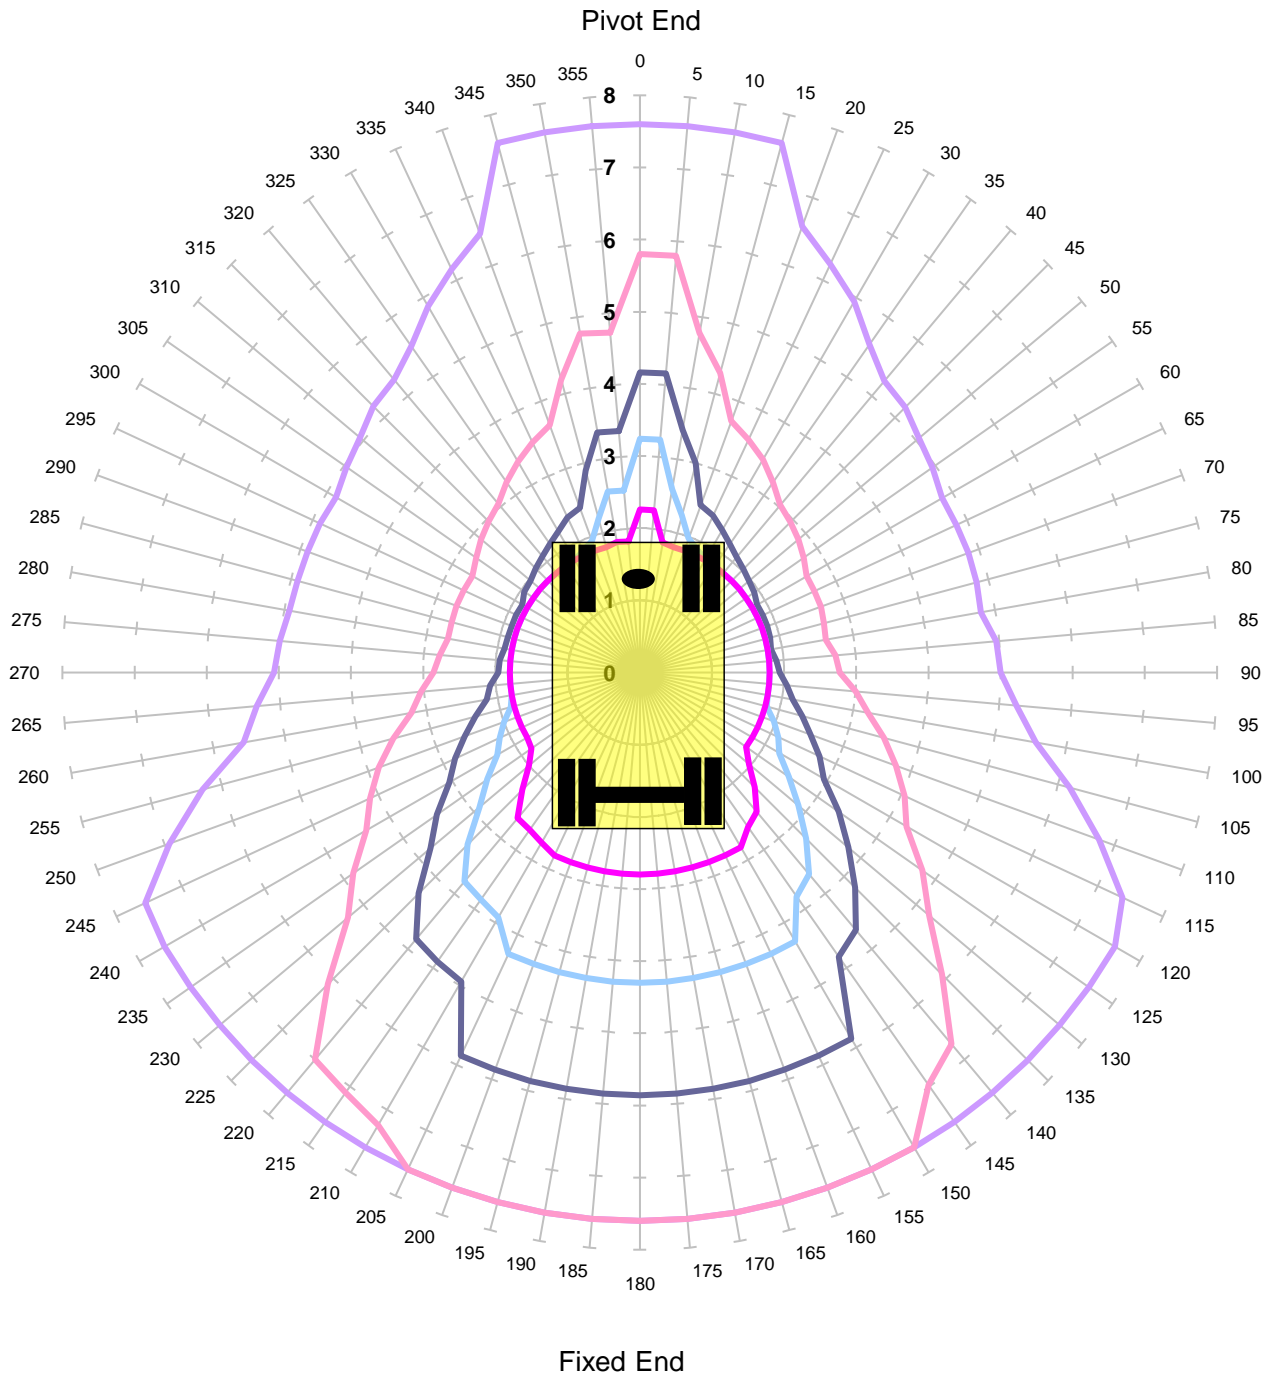


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	47.0%
COMMENT:			

Komatsu PW160
Max Capacity Contours of Radius(m) Plots 2.5m Dipper
Level Ground Height 2m Lift QH
Locked Road - Tandem Lift

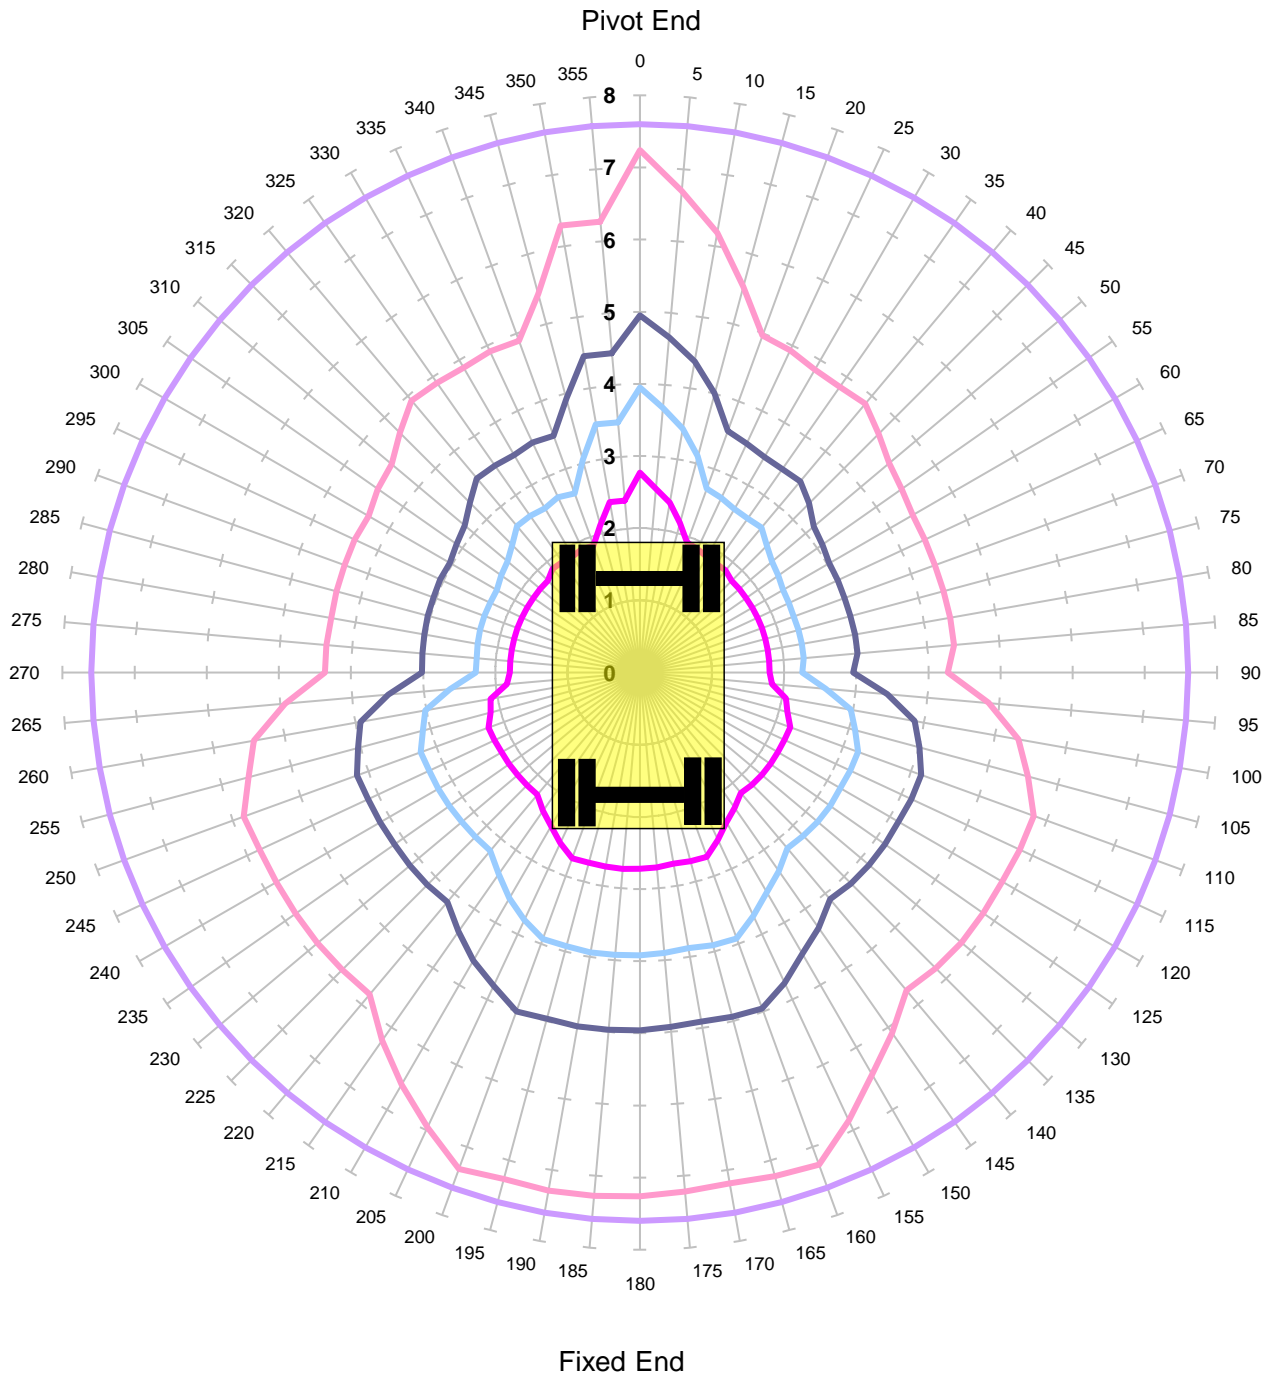

Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Komatsu PW160	REFERENCE:	
SERIAL No:	H55918	DATE OF CHART:	3-Apr-2018
EQUIPMENT:	2.00m + 3.40m + 2.50m	SAFETY FACTOR:	47.0%
COMMENT:			